


# Mimesi White Integralis - App Compatible

Carlotta de Bevilacqua



IP20    Dimmbar: 

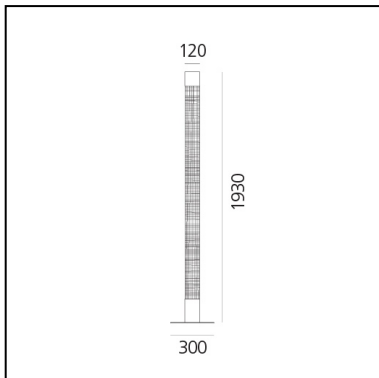

## LUMINAIRE

### DAY MODE

- Watt: **42W**
- Spannung (V): **220/240V**
- Lichtstrom (lm): **3887lm**
- Strahlungsstärke: **2629mW**
- CCT: **5000K**
- Efficiency: **82%**
- Efficacy: **92.55lm/W**
- CRI: **90**
- Dimmable Typology: **APP**

## BESCHREIBUNG

Light, architectural space and natural landscape are the main elements of this project, based on principles of reduction of energy and materials. Through the dematerialization of volumes and mimetic transparency, and thanks to a slim recycled aluminium structure and methacrylate body, Mimesi does not hinder the vision, but silently integrates with the surrounding environment. When turned on it becomes a central element in the staging of people's lives, high lighting luminous writing on the cortex of the light. In the WHITE INTEGRALIS version, Artemide App compatible, Mimesi is designed to offer a white emission ensuring perfect perception while respecting the human presence and which at the same time combines control of microbial growth. It can vary in intensity and is available with a fixed CCT of 5000K, with a high color rendering index (CRI 90).

**ARTIKELNUMMER: 1835010IN0APP**

## FUNKTIONEN

- Artikelnummer: **1835010IN0APP**
- Farbe: **Mirror**
- Installation: **Stehleuchte**
- Material: **Technopolymer, aluminum, steel**
- Serie: **Design Collection**
- Anwendungsbereich: **Innenbeleuchtung**
- Lichtverteilung: **diffus, indirekt**
- design: **Carlotta de Bevilacqua**

## DIMENSION

- Länge: **cm 12**
- Breite: **cm 12**
- Höhe: **cm 193**
- Länge Fuß: **cm 30**
- Breite Fuß: **cm 30**
- Widerstand: **N/D**
- Glühdrahttest: **650°**

## INKLUSIVE LICHTQUELLEN

- Kategorie: **Led**
- Anzahl: **1**
- Farbtemperatur(K): **5000K**
- CRI: **90**
- Color Tolerance: **3SDCM**
- Service Life: **L80 (10K) 55000h**

**ZUBEHÖR**

Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP