

Luminaire


Code 1282010A
Name NH S3 2 ARMS

Measurem.

Code FTS2000219
Name NH S3 2 ARMS

Luminaire Flux	2283.58 lm	Luminaire Power	27.00 W	Efficacy	84.58 lm/W	Efficiency	75.07%
Lamps Flux	3042.00 lm	Maximum value	100.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	1266 mm 220 mm	Width Height	220 mm 440 mm	Height	1340 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.038013 m2 0.096800 m2 0.096800 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.096800 m2 0.096800 m2 0.103121 m2				
Coordinate system Date Measurement Distance	CG 02-07-2018 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 3042.00 lm				
LED SSW 100W A67 E27 WW FR ND 1BC/6							
C.I.E. F UTE	30 57 80 67 75 0.50 J + 0.25 T	D DIN 5040 B NBN	B11 BZ 7				

1266mm x 220mm




Semipiani C

180.0 ——— 0.0

ULOR 25.02 %

DLOR 50.05 %

RN 33.33 %

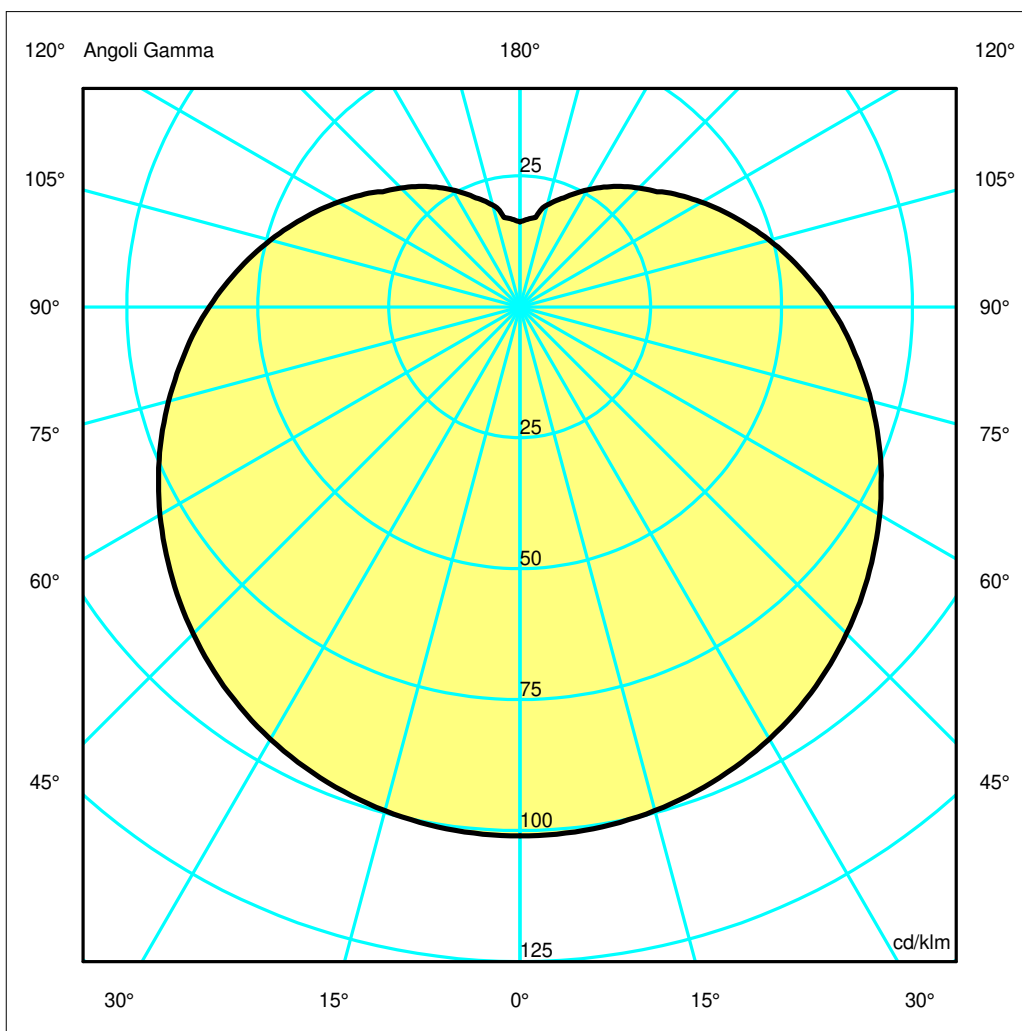

Luminaire

Code 1282010A
Name NH S3 2 ARMS

Measurem.

Code FTS2000219
Name NH S3 2 ARMS

Luminaire Flux	2283.58 lm	Luminaire Power	27.00 W	Efficacy	84.58 lm/W	Efficiency	75.07%
Lamps Flux	3042.00 lm	Maximum value	100.99 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	1266 mm 220 mm	Width Height	220 mm 440 mm	Height	1340 mm
Horizontal Luminous Area		0.038013 m2		Emitting area on Plane 180°		0.096800 m2	
Emitting area on Plane 0°		0.096800 m2		Emitting area on Plane 270°		0.096800 m2	
Emitting area on Plane 90°		0.096800 m2		Glare area at 76°		0.103121 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3042.00 lm	
LED SSW 100W A67 E27 WW FR ND 1BC/6							
C.I.E.	30 57 80 67 75			D DIN 5040	B11		
F UTE	0.50 J + 0.25 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0