

Artikel Nr.: 731137

Wandaufbauleuchte, Adebar Motion, Grau, 220-240V AC/50-60Hz, 1x max. 60,00 W

Technische Daten

Charakteristik

Material	Aluminium Druckguss / Glas
Farbe	Grau
Optik	
im Lieferumfang	




Elektrische Daten

Leistung	1x max. 60,00 W
Eingangsspannung	220-240V AC/50-60Hz
Eingangsstrom	
Fassung / Sockel	E27
Anzahl Sockel	
Netzgerät	
Ansteuerung	Bewegungsmelder
Anschlussmöglichkeit	
Schutzklasse I, II, III	I



Artikel Nr.: 731137

Wandaufbauleuchte, Adebar Motion, Grau, 220-240V AC/50-60Hz, 1x max. 60,00 W

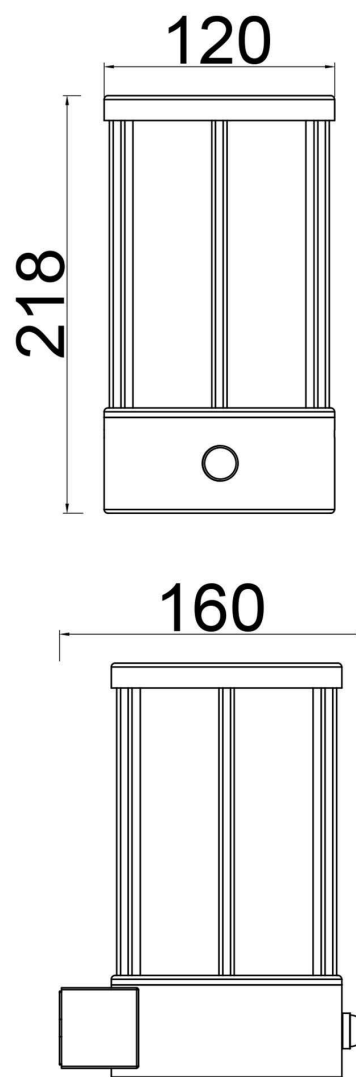

Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

Abmessungen und Gewicht

Länge	218,00
Breite	0,00
Höhe	0,00
Durchmesser	160,00
Deckenabhängung	0,00
Gewicht	

Sockelmaß


Länge	0,00
Breite	0,00
Höhe	0,00
Durchmesser	0,00

Artikel Nr.: 731137

Wandaufbauleuchte, Adebar Motion, Grau, 220-240V AC/50-60Hz, 1x max. 60,00 W

Grenzwerte

Betriebstemperatur	-20°C - +50°C
Lagertemperatur	-10°C - +60°C
IP - Schutzart	IP44

EEL	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
IP44	Schutz gegen das Eindringen von Fremdkörper > 1 mm. Geschützt gegen Spritzwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

Article no.: 731137

Surface mounted wall lamp, Adebar Motion, gray, 220-240V AC/50-60Hz, 1x max. 60,00 W

Technical Data**General Characteristics**

Material	aluminum die casting / glass
Colour	gray
Optics	
included in delivery	

**Electrical Characteristics**

Power	1x max. 60,00 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	E27
Number of bases	
Power supply unit	
Electronically reversible	motion sensor
Connection possibility	
Protection class I, II, III	I



Article no.: 731137

Surface mounted wall lamp, Adebar Motion, gray, 220-240V AC/50-60Hz, 1x max. 60,00 W

Light Direction


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

Dimensions & Weight

Length	218,00
Width	0,00
Height	0,00
Diameter	160,00
Suspensions from ceiling	0,00
Product Weight	

Base dimensions

Length	0,00
Width	0,00
Height	0,00
Diameter	0,00

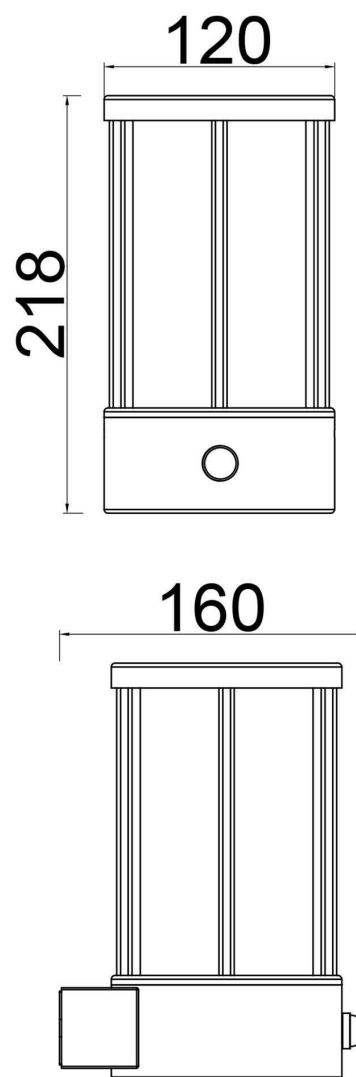


Article no.: 731137

Surface mounted wall lamp, Adebar Motion, gray, 220-240V AC/50-60Hz, 1x max. 60,00 W

Absolute maximum ratings

Working temperature	-20°C - +50°C
Storage temperature	-10°C - +60°C
IP - Code	IP44

EEL	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
IP44	Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
