


**Luminaire**

Code 2061010A  
Name RIPPLE 70 SOSPENSIONE

**Measurem.**

Code FTS2000799  
Name RIPPLE 70 SOSPENSIONE

Luminaire Flux	3350.00 lm	Luminaire Power	50.00 W	Efficacy	67.00 lm/W	Efficiency	100.00%
Lamps Flux	3350.00 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 700 mm Diam. 650 mm	Height	60 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.331831 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.080277 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	25-09-2020	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			3350.00 lm		
LED Flux=6600lm LED Power=46W Eff=51% EfcLed=143lm/W EfcLum=67lm/W CCT=3000 Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	47 79 96 100 100	D DIN 5040			A30		
F UTE	1.00 E	B NBN			BZ 5 / 1.25 / BZ 4		

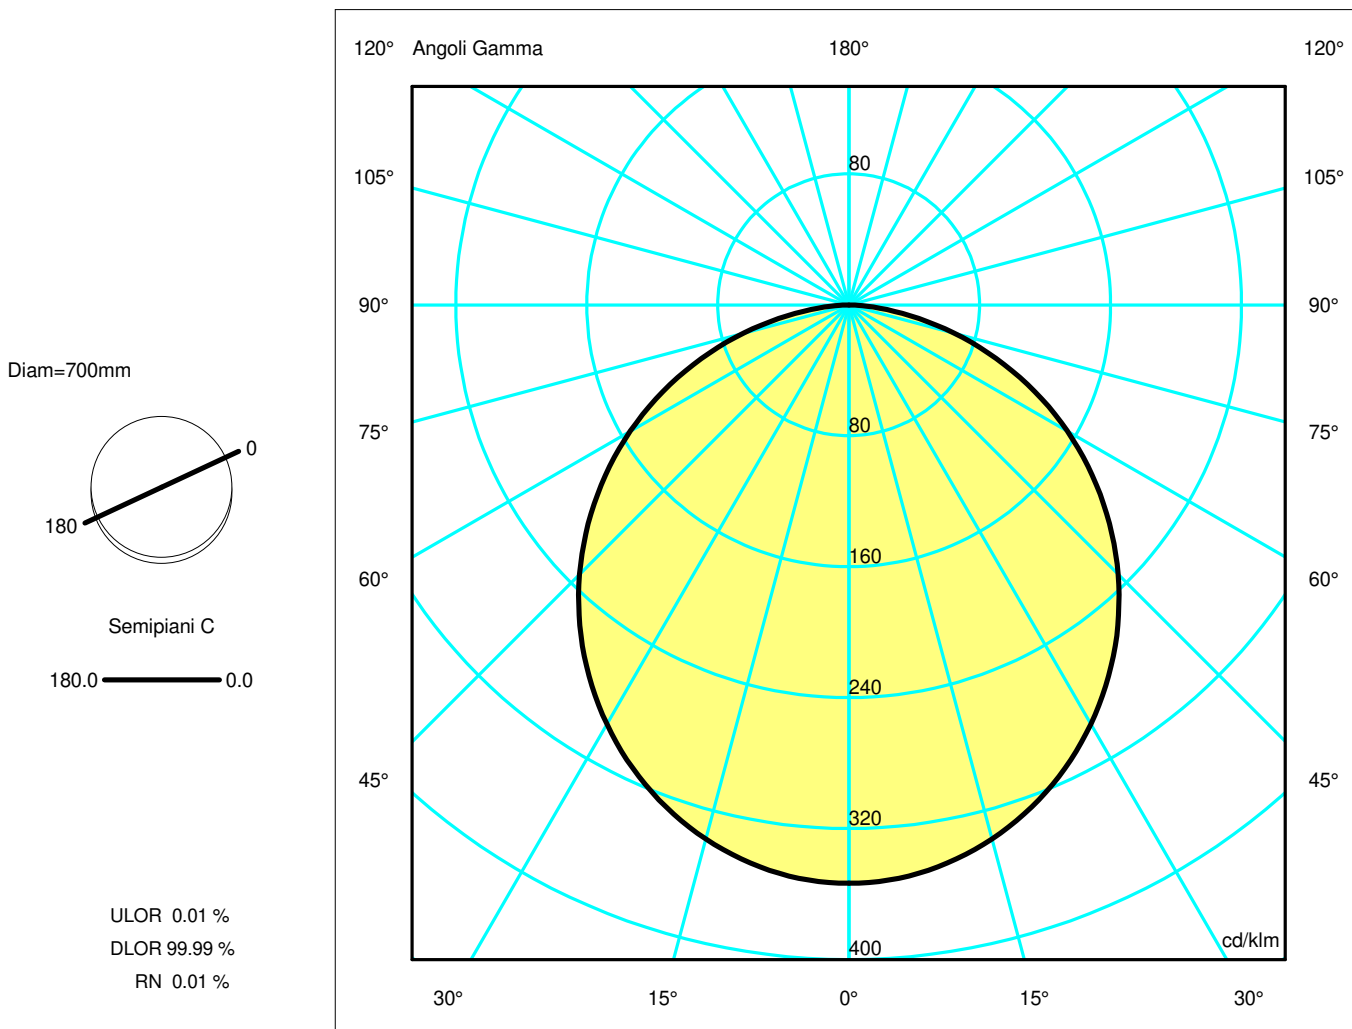

**Luminaire**

Code 2061010A  
Name RIPPLE 70 SOSPENSIONE

**Measurerm.**


Code FTS2000799  
Name RIPPLE 70 SOSPENSIONE

Luminaire Flux	3350.00 lm	Luminaire Power	50.00 W	Efficacy	67.00 lm/W	Efficiency	100.00%
Lamps Flux	3350.00 lm	Maximum value	353.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	700 mm 650 mm	Height Height	60 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.331831 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.080277 m2	
Coordinate system Date Measurement Distance		CG 25-09-2020 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 3350.00 lm	
LED Flux=6600lm LED Power=46W Eff=51% EfcLed=143lm/W EfcLum=67lm/W CCT=3000 Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	47 79 96 100 100 1.00 E			D DIN 5040 B NBN	A30 BZ 5 / 1.25 / BZ 4		

## Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.48	2.96	4.44	5.91	7.39	OC	1.48	2.96	4.44	5.91	7.39
OB	1.48	2.96	4.44	5.91	7.39	OD	1.48	2.96	4.44	5.91	7.39

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1183.54	1177.72	1131.60	1046.33	926.99	779.34	608.36	420.17	222.33	50.27
OB	1183.54	1177.72	1131.60	1046.33	926.99	779.34	608.36	420.17	222.33	50.27
OC	1183.54	1177.72	1131.60	1046.33	926.99	779.34	608.36	420.17	222.33	50.27
OD	1183.54	1177.72	1131.60	1046.33	926.99	779.34	608.36	420.17	222.33	50.27

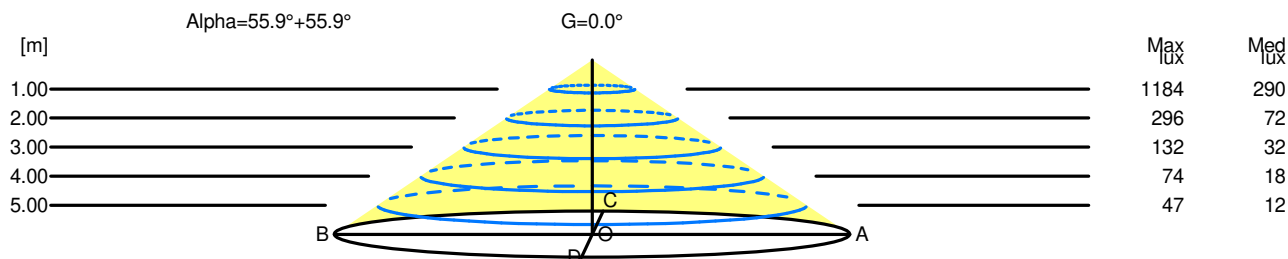

H[m]	D[m]	Max lux	Med lux	Alpha=55.9°+55.9°	G=0.0
1.00	2.96	1184	290		
2.00	5.91	296	72		
3.00	8.87	132	32		
4.00	11.83	74	18		
5.00	14.79	47	12		