


FINO PENDANT

Housing: Pendant light, solid aluminium housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

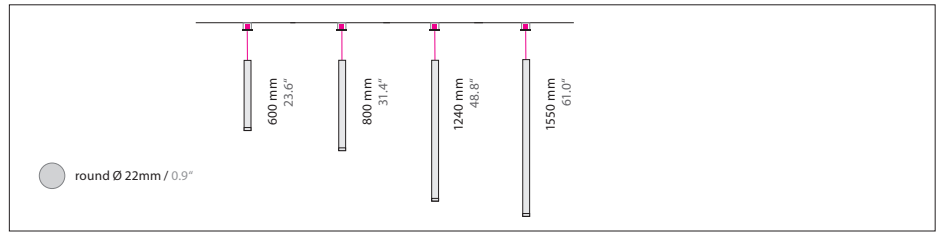

Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version		
Sizes Ø 22 / L 600 mm	Ø 0.9 / L 23.6"	5	365	0,4 / 0.8	1533.	x x .	x x .	x x .	x x .	x x x .	x x		
Ø 22 / L 800 mm	Ø 0.9 / L 31.4"	5	365	0,5 / 1.1	1534.	x x .	x x .	x x .	x x .	x x x .	x x		
Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	5	365	0,7 / 1.5	1535.	x x .	x x .	x x .	x x .	x x x .	x x		
Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	5	365	0,8 / 1.7	1536.	x x .	x x .	x x .	x x .	x x x .	x x		
LED CRI > 90		Standard: Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x x		
SELV		Optional: Neutral-white	4000 K		x x x .	40.	x x .	x x .	x x .	x x x .	x x		
		Extra warm-white	2700 K		x x x .	27.	x x .	x x .	x x .	x x x .	x x		
Dimming		Standard: TRIAC			x x x .	x x .	11.	00.	x x .	x x x .	x x		
		DALI			x x x .	x x .	61.	00.	x x .	x x x .	x x		
		Optional: DALI			x x x .	x x .	61.	00.	x x .	x x x .	x x		
Finish		Standard: 66 bronze anodised brushed	Optional: 60 silver anodised brushed	62 black anodised brushed	65 champ. gold anodised brushed	22 aluminium polished							
							x x x .	x x .	x x .	x x .	x x		
Power supply cable		Z 80 Black matt					x x x .	x x .	x x .	x x .	Z80. x x		
Mounting version		F Height adjustable on canopy		R		Z							
Standard:		Suspension with canopy DB 78/32 and 1 power supply cable 2000 mm / 78.7"	Optional: Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in cavity box	U3 Ceiling cutout 35 mm / 1.4" Power supply unit in suspended ceiling		Suspension with PALADIO TRACK System (48V-DALI)	x x x .	x x .	x x .	x x .	x x .	x x x .	---

Type	For use with Mounting version	Protective rating
DA 50 Cover Ø 50 mm / 2.0" Ceiling cutout 35 mm / 2.0" Power supply unit in suspended ceiling 3) an inspection flap is required for the power supply unit white (22 polished) Same colour as luminaire (60,62,65,66)	U3	IP 40
DA 80 Cover Ø 80 mm / 3.1" ceiling cutout 68mm / 2.7" Power supply unit in cavity box	R	IP 40
DB 78/32 Cover Ø 78 mm / 3.0" H 32 mm / 1.2" white (22 polished) Same colour as luminaire (60,62,65,66)	F	IP 40

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz.

---	---	---	00.	---	Z80.	---
-----	-----	-----	------------	-----	-------------	-----

Complete order number

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

