

Electronic LED cord dimmer T24.08

Item-no.: 2400x0800(i) (transparent) | 2420x0800(i) (black) | 2460x0800(i) (white)



LED multi-dimmer for reliable dimming, regardless of producer and type of LED

Suitable for dimmable filament LEDs, LED lamps, LED drivers, incandescent and HV-halogen lamps

SILENT TECHNOLOGY – Operates utterly quiet

Opportunities for optimized and flicker-free dimming of LED lamps in min. and max. area

Comfortable full-surface operation (push-dim)

Electronic overload/short-circuit protection, temperature protection through thermal fuse

Soft start and memory function plus (even after zero voltage, e.g. switchable outlet)

Decent orientation light to find the dimmer easily in the dark

Integrated protective conductor terminal

EHMANN advantage – 100 % quality assurance, 5 years warranty, German manufacturer







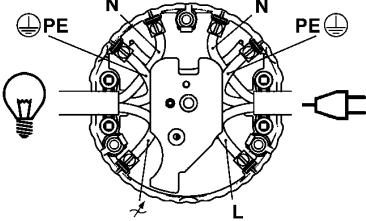
EHMANN service – Up to date LED recommendation accessible via imprinted QR-code at any time

EHMANN quality – High-grade manufacturing and reliable function



Electronic LED cord dimmer T24.08

Technical data

<p>3 – 55 W LED rated power</p>	<p>5 – 150 W/VA Rated power</p>	<p>230 V ~ (+/- 10%) / 50 Hz Rated voltage</p>									
<p>Suitable for dimmable filament LEDs, LED lamps, incandescent and HV-halogen lamps</p>											
<p>Operating principle: leading edge Function: On/off/dim via push button (hand- and foot actuation) Temperature protection: thermal fuse Overload/short-circuit protection: Electronic Max. cord diameter: 7,5 mm Cut-off: Electronic ε Cycle of operation: > 50.000 Connection: Screw terminal 0,5 - 1,5 mm² (flexible) Mode of operation: S1 Protection class: II Safety class: IP20 Contamination level: 1</p>		   <p>Checked by:</p> 									
<p>Opportunities for optimized and flicker-free dimming of LED lamps In emergence of flickering-effects during dimming an LED lamp, there is the possibility of adjusting the minimum and maximum brightness, in order to optimize the dimming behaviour.</p> 	<p>LED recommendation Shows which LEDs are compatible with this dimmer. Available via QR code or online at www.ehmann-gmbh.de</p> 	<p>Connection diagram</p> 									
<table border="0"> <tr> <td>Item-no. 2400x0800(i) (transparent)</td> <td>EAN 401209600621 3</td> <td>PU 10</td> </tr> <tr> <td>Item-no. 2420x0800(i) (black)</td> <td>EAN 401209600601 5</td> <td>PU 10</td> </tr> <tr> <td>Item-no. 2460x0800(i) (white)</td> <td>EAN 401209600602 2</td> <td>PU 10</td> </tr> </table>		Item-no. 2400x0800(i) (transparent)	EAN 401209600621 3	PU 10	Item-no. 2420x0800(i) (black)	EAN 401209600601 5	PU 10	Item-no. 2460x0800(i) (white)	EAN 401209600602 2	PU 10	<p>Ø 75 x 26 mm Dimensions (Ø x H)</p>
Item-no. 2400x0800(i) (transparent)	EAN 401209600621 3	PU 10									
Item-no. 2420x0800(i) (black)	EAN 401209600601 5	PU 10									
Item-no. 2460x0800(i) (white)	EAN 401209600602 2	PU 10									