


Luminaire

Code 0011820A
Name TOLOMEO MICRO T BIANCA LUC.

Measurem.

Code FTS1901581
Name TOLOMEO MICRO T BIANCA LUC.

Luminaire Flux	243.95 lm	Luminaire Power	40.00 W	Efficacy	6.10 lm/W	Efficiency	56.73%
Lamps Flux	430.00 lm	Maximum value	210.77 cd/klm	Position	C=45.00 G=10.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 99 mm	Height Height	80 mm 0 mm		
Horizontal Luminous Area	0.007698 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001862 m2		
Coordinate system	CG			Symmetry Type	Asymmetrical		
Date	02-06-2002			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	430.00 lm		
N40SI							
C.I.E.	55 88 98 93 57			D DIN 5040	A41		
F UTE	0.52 D + 0.04 T			B NBN	BZ 4 / 0.8 / BZ 3		

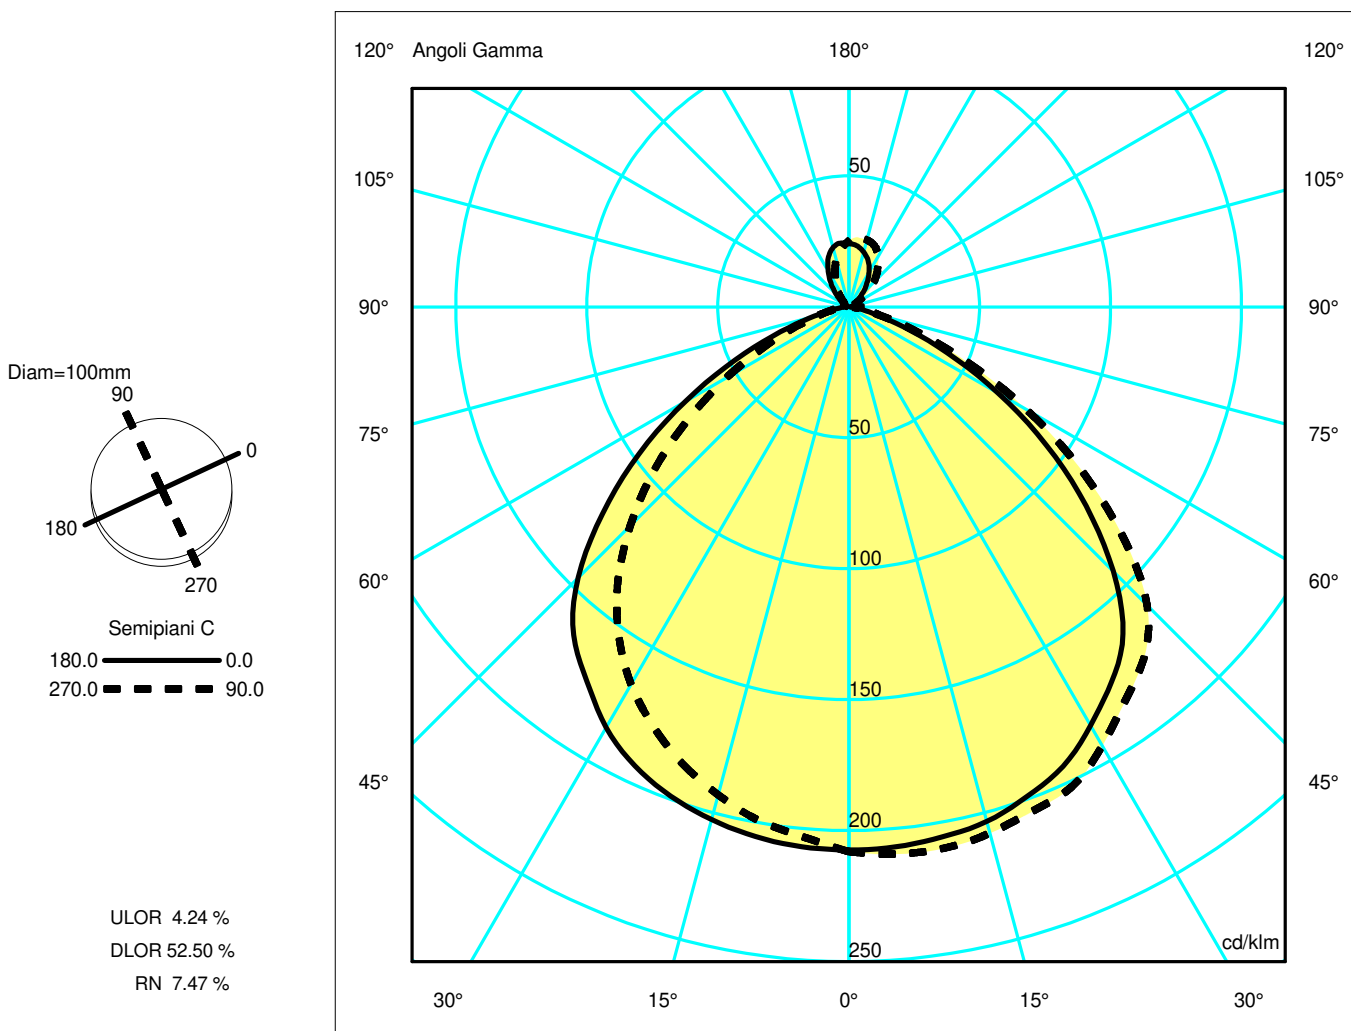

Luminaire

Code 0011820A
Name TOLOMEO MICRO T BIANCA LUC.

Measur.


Code FTS1901581
Name TOLOMEO MICRO T BIANCA LUC.

Luminaire Flux	243.95 lm	Luminaire Power	40.00 W	Efficacy	6.10 lm/W	Efficiency	56.73%
Lamps Flux	430.00 lm	Maximum value	210.77 cd/klm	Position	C=45.00 G=10.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	80 mm		
Round Luminous Area		Diam.	99 mm	Height	0 mm		
Horizontal Luminous Area	0.007698 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.001862 m2	
Coordinate system	CG			Symmetry Type		Asymmetrical	
Date	02-06-2002			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		430.00 lm	
N40SI							
C.I.E.	55 88 98 93 57			D DIN 5040	A41		
F UTE	0.52 D + 0.04 T			B NBN	BZ 4 / 0.8 / BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.32	2.64	3.95	5.27	6.59	OC	1.47	2.94	4.41	5.88	7.34
OB	1.37	2.74	4.11	5.48	6.84	OD	1.13	2.25	3.38	4.50	5.63

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	89.17	88.99	87.48	83.24	75.20	61.39	39.63	17.83	4.12	0.87
OB	89.17	88.97	87.13	83.11	75.00	62.83	42.07	20.59	5.85	1.34
OC	89.49	90.18	89.49	86.89	79.09	69.30	46.50	21.53	5.16	0.94
OD	89.49	87.33	82.92	75.97	65.82	50.62	32.04	14.83	4.46	1.24

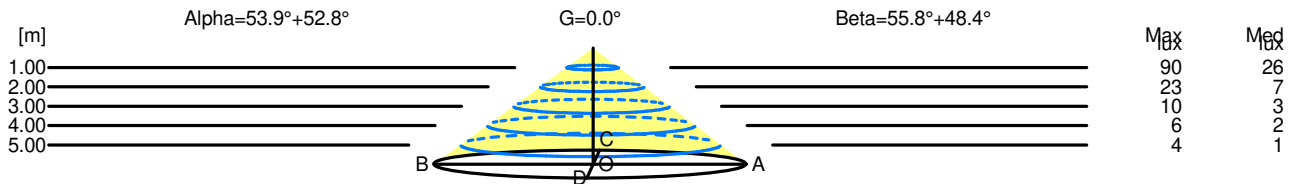

H[m]	D[m]	Max lux	Med lux	Alpha=53.9°+52.8°	G=0.0
1.00	2.69	90	26		
2.00	5.37	23	7		
3.00	8.06	10	3		
4.00	10.75	6	2		
5.00	13.43	4	1		

H[m]	D[m]	Max lux	Med lux	Beta=48.4°+55.8°	G=0.0
1.00	2.59	90	26		
2.00	5.19	23	7		
3.00	7.78	10	3		
4.00	10.38	6	2		
5.00	12.97	4	1		