


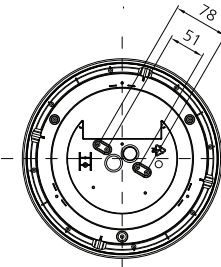
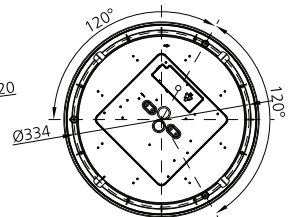
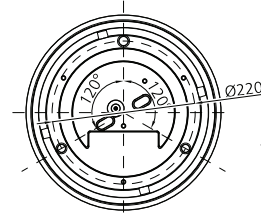

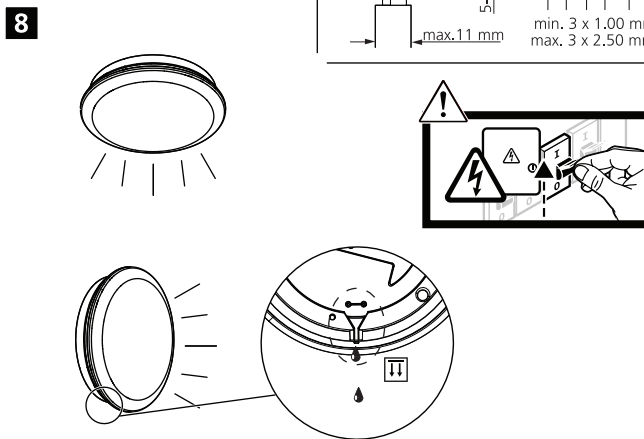
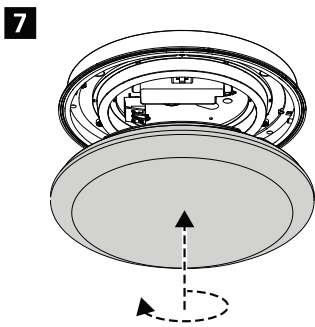
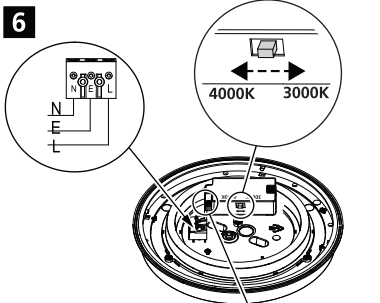
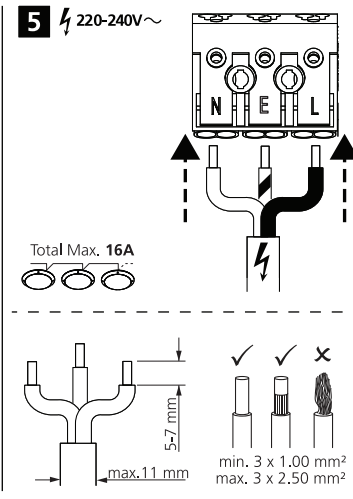
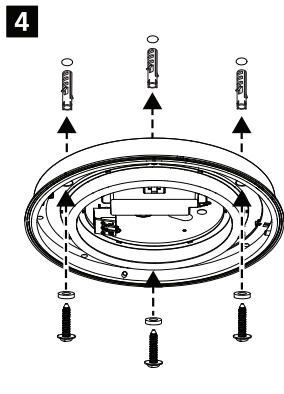
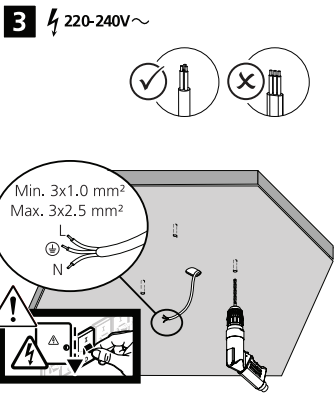
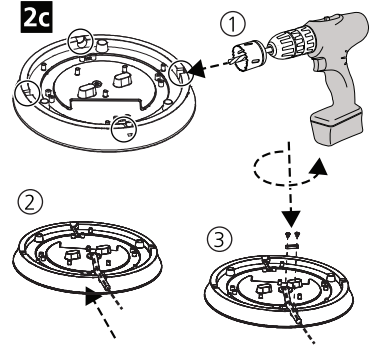
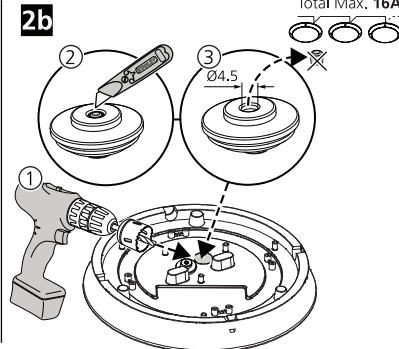


H (mm)	Ø (mm)
94	300
105	400

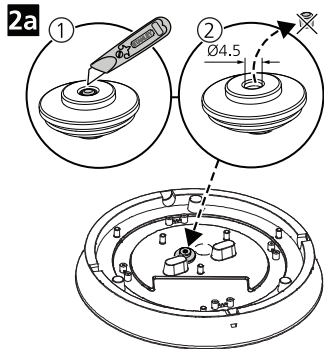

Ø300

Ø400

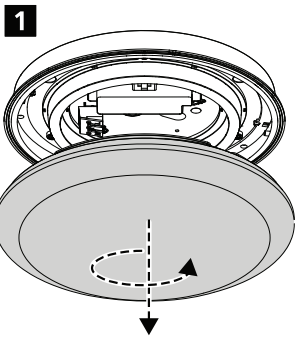


4000K

Factory Settings		START Surface IP54 Multipower MW	
1	2	0043406	0043410
●●	100	17,5	2000
●○	75	13,5	1500
○○	50	9,3	1000
○●	26	6	500
●●	176	34	4000
●○	155	30	3500
○○	134	26	3000
○●	115	22	2500

3000K

Factory Settings		START Surface IP54 Multipower MW	
1	2	0043406	0043410
●●	100	17,5	1870
●○	75	13,5	1400
○○	50	9,3	930
○●	26	6	460
●●	176	34	3750
●○	155	30	3250
○○	134	26	2800
○●	115	22	2350



Detection range




● Switch UP
○ Switch DOWN

1	2	
●	●	100%
○	●	75%
●	○	50%
○	○	10%

SENS

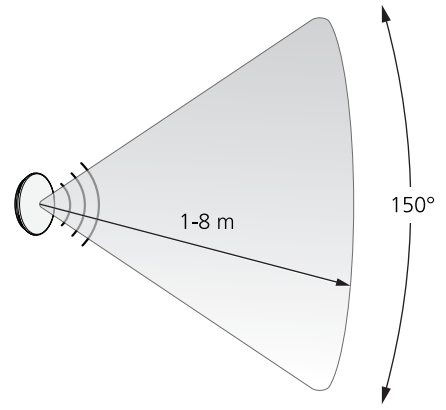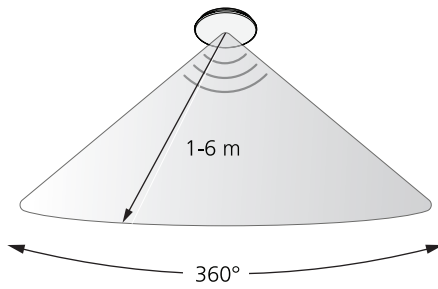



Delay




● Switch UP
○ Switch DOWN

3	4	
●	●	5s
○	●	90s
●	○	5min
○	○	15min

TIME

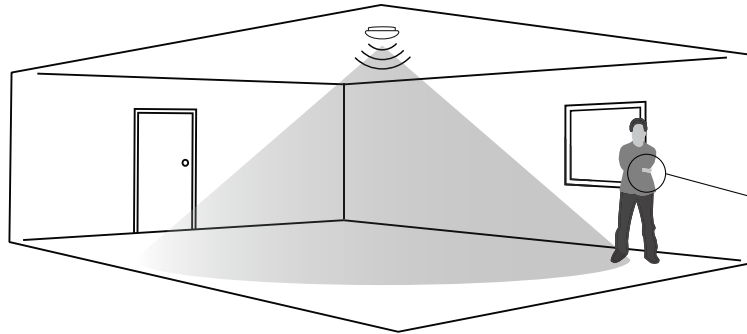


Sensitivity



● Switch UP
○ Switch DOWN


5	
●	Disable
○	50lux

LUX




5	
●	Disable
○	50lux

LUX



ON/OFF





● Switch UP
○ Switch DOWN

6	
●	ON
○	OFF

6	
●	ON
○	OFF

Installation height

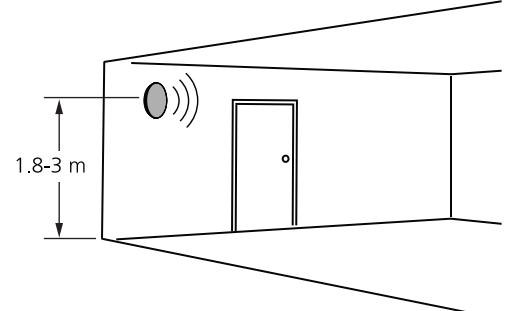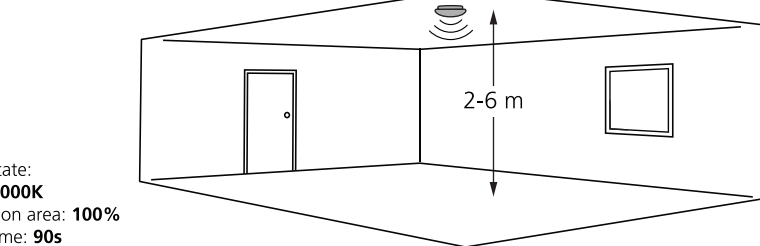

Initial state:
CCT: **3000K**
Detection area: **100%**
Hold time: **90s**
Daylight: **50lux**