


## Luminaire

Code 1453010APP  
Name LOOK AT ME 35 S CLUSTER 3 app compat

## Measurem.

Code FTS2000715  
Name LOOK AT ME 35 S CLUSTER 3 app compat

Luminaire Flux	1905.36 lm	Luminaire Power	50.00 W	Efficacy	38.11 lm/W	Efficiency	100.00%
Lamps Flux	1905.36 lm	Maximum value	343.29 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 760 mm Diam. 760 mm	Height	235 mm	Height	235 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.453646 m2 0.178600 m2 0.178600 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.178600 m2 0.178600 m2 0.283042 m2				
Coordinate system Date Measurement Distance	CG 19-08-2020 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1905.36 lm				
LED Flux=4764.6lm LED Power=46.2W Eff=40% EfcLed=103lm/W EfcLum=38lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	48 80 96 92 100 0.92 E + 0.08 T	D DIN 5040 B NBN	A31 BZ 4				

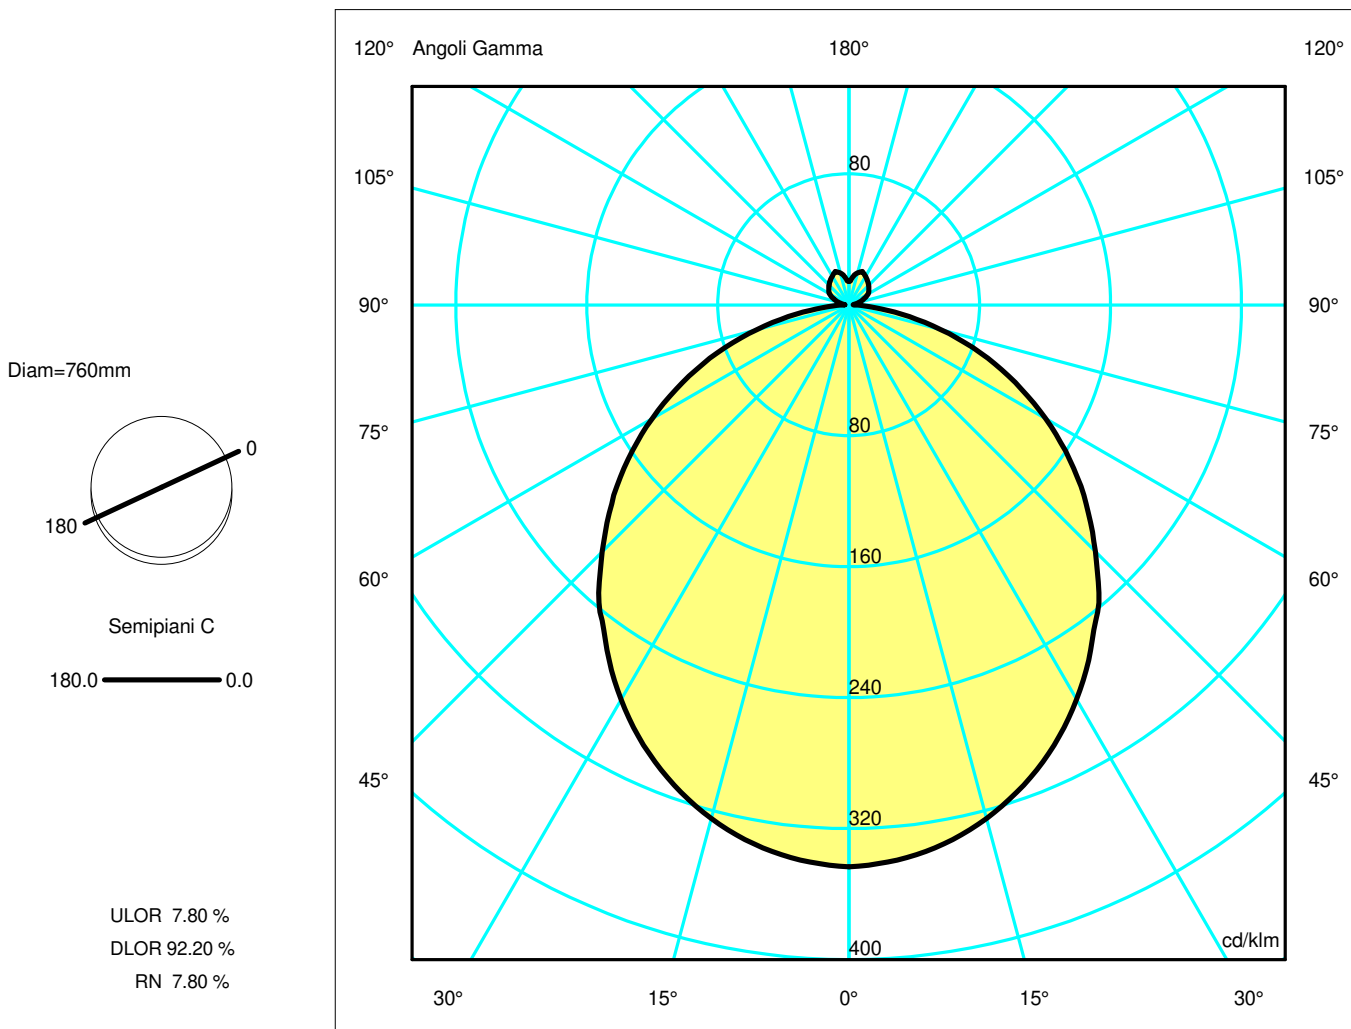

## Luminaire

Code 1453010APP  
Name LOOK AT ME 35 S CLUSTER 3 app compat

## Measurerm.


Code FTS2000715  
Name LOOK AT ME 35 S CLUSTER 3 app compat

Luminaire Flux	1905.36 lm	Luminaire Power	50.00 W	Efficacy	38.11 lm/W	Efficiency	100.00%
Lamps Flux	1905.36 lm	Maximum value	343.29 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	760 mm 760 mm	Height Height	235 mm 235 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.453646 m2 0.178600 m2 0.178600 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.178600 m2 0.178600 m2 0.283042 m2	
Coordinate system Date Measurement Distance		CG 19-08-2020 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1905.36 lm	
LED Flux=4764.6lm LED Power=46.2W Eff=40% EfcLed=103lm/W EfcLum=38lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	48 80 96 92 100 0.92 E + 0.08 T			D DIN 5040 B NBN	A31 BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.36	2.72	4.07	5.43	6.79	OC	1.36	2.72	4.07	5.43	6.79
OB	1.36	2.72	4.07	5.43	6.79	OD	1.36	2.72	4.07	5.43	6.79

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	654.09	648.56	618.90	565.33	490.63	405.87	313.56	213.81	110.87	24.01
OB	654.09	648.56	618.90	565.33	490.63	405.87	313.56	213.81	110.87	24.01
OC	654.09	648.56	618.90	565.33	490.63	405.87	313.56	213.81	110.87	24.01
OD	654.09	648.56	618.90	565.33	490.63	405.87	313.56	213.81	110.87	24.01

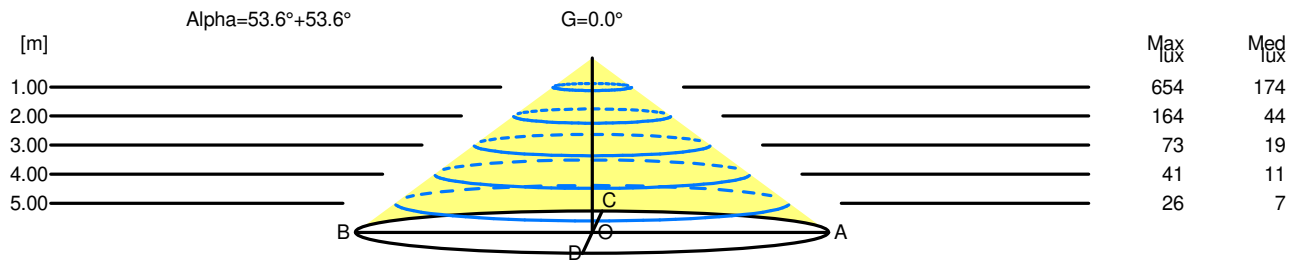

H[m]	D[m]	Max lux	Med lux	Alpha=53.6°+53.6°	G=0.0
1.00	2.72	654	174		
2.00	5.43	164	44		
3.00	8.15	73	19		
4.00	10.86	41	11		
5.00	13.58	26	7		