

## Luminaire

Code 1278010A  
Name NH S4 CIRCOLARE

## Measurem.

Code FTS2000221  
Name NH S4 CIRCOLARE


Luminaire Flux	1656.31 lm	Luminaire Power	22.00 W	Efficacy	75.29 lm/W	Efficiency	76.65%
Lamps Flux	2161.00 lm	Maximum value	103.11 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	220 mm 220 mm	Height Height	220 mm 220 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.038013 m2 0.048400 m2 0.048400 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.048400 m2 0.048400 m2 0.056159 m2	
Coordinate system Date Measurement Distance		CG 02-07-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2161.00 lm	

C.I.E. 30 57 80 67 77  
F UTE 0.51 J + 0.26 T

D DIN 5040  
B NBN

B11  
BZ 7

Diam=220mm




Semipiani C

180.0 ——— 0.0

ULOR 25.55 %

DLOR 51.10 %

RN 33.33 %

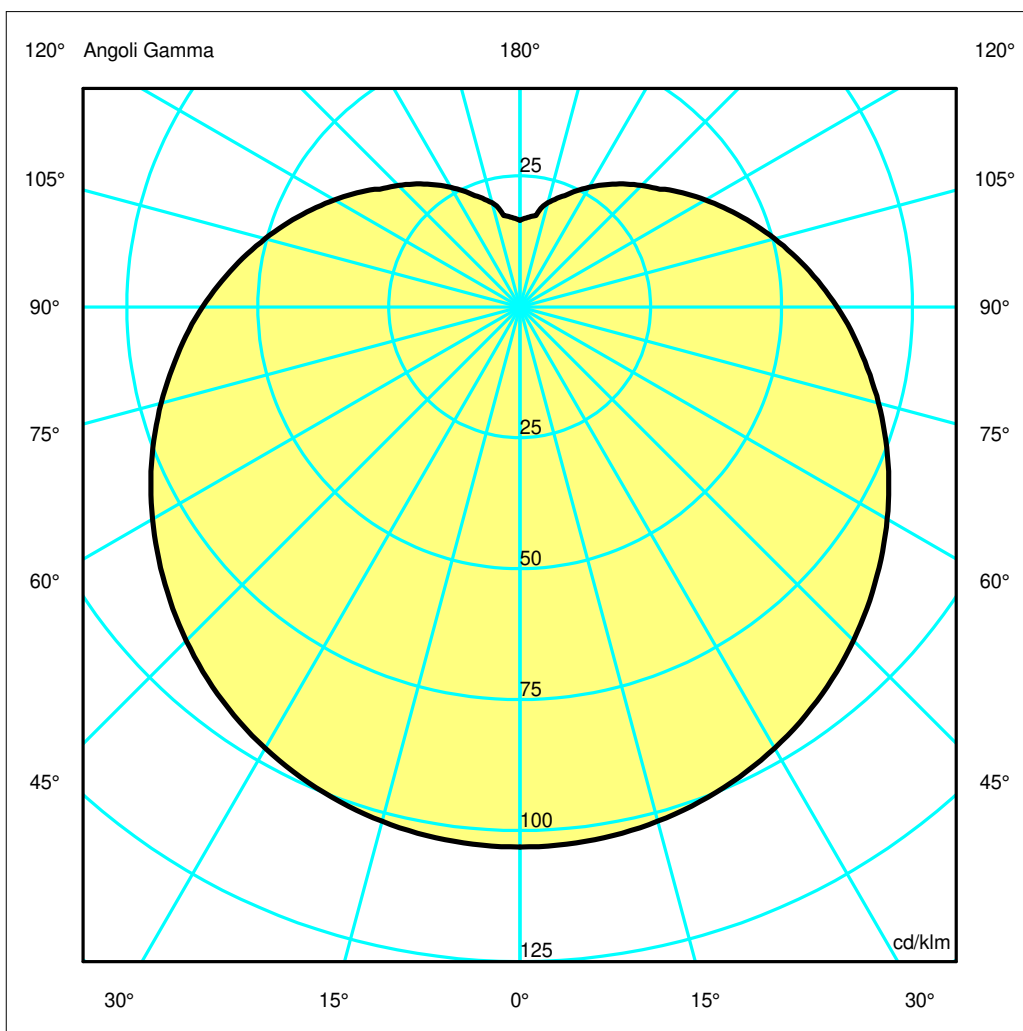

**Luminaire**

Code 1278010A  
Name NH S4 CIRCOLARE

**Measur.**

Code FTS2000221  
Name NH S4 CIRCOLARE

Luminaire Flux	1656.31 lm	Luminaire Power	22.00 W	Efficacy	75.29 lm/W	Efficiency	76.65%
Lamps Flux	2161.00 lm	Maximum value	103.11 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	220 mm	Height	220 mm		
Round Luminous Area		Diam.	220 mm	Height	220 mm		
Horizontal Luminous Area		0.038013 m2		Emitting area on Plane 180°		0.048400 m2	
Emitting area on Plane 0°		0.048400 m2		Emitting area on Plane 270°		0.048400 m2	
Emitting area on Plane 90°		0.048400 m2		Glare area at 76°		0.056159 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2161.00 lm	
-							
C.I.E.	30 57 80 67 77			D DIN 5040		B11	
F UTE	0.51 J + 0.26 T			B NBN		BZ 7	

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0