

## LED cord dimmer T26.07.50

Item-no.: 2600x0750(i) (transparent) | 2620x0750(i) (black) | 2660x0750(i) (white)



Suitable for dimmable LED lamps, incandescent, HV- and LV-halogen lamps with magnetic transformer

Operates quietly

Opportunity for optimized and flicker-free dimming of LED lamps in min. area

No stand-by consumption because of real on / off switch

Overload/short-circuit protection

Integrated protective conductor terminal

Applicable as intermediate and end device due to different connection opportunities

EHMANN advantage – 100 % quality check, 5 years warranty, German manufacturer






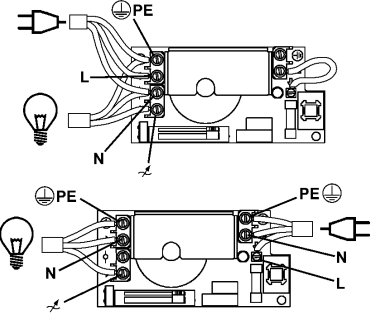
EHMANN service – Up to date LED recommendation accessible via imprinted QR-code at any time

EHMANN quality – High-grade manufacturing and reliable function



## LED cord dimmer T26.07.50

### Technical data

<b>3 – 150 W</b> <b>LED rated power</b>	<b>20 – 500 W/VA</b> <b>Rated power</b>	<b>230 V ~ (+/- 10%) / 50 Hz</b> <b>Rated voltage</b>
Suitable for dimmable LED lamps, incandescent, HV- and LV-halogen lamps with magnetic transformer		
<p>Operating principle: leading edge</p> <p>Function: On /off via separate switch; dimming via slide switch (for hand- and foot use)</p> <p>Temperature protection: thermal fuse</p> <p>Overload/short circuit protection: fuse 5x20mm T2AH/250 V</p> <p>Max. cord diameter: 6,5 mm</p> <p>Cut-off: Complete cut-off</p> <p>Cycle of operation: &gt;50.000</p> <p>Connection: Screw terminal 0,5 - 1,5 mm<sup>2</sup> (flexible)</p> <p>Mode of operation: S1</p> <p>Protection class: II</p> <p>Safety class: IP20</p> <p>Contamination level: 1</p>	  	
<p><b>Opportunity for optimized and flicker-free dimming of LED lamps</b></p> <p>In emergence of flickering-effects during dimming an LED lamp, there is the possibility of adjusting the minimum brightness, in order to optimize the dimming behaviour.</p> 	<p><b>LED recommendation</b></p> <p>Shows which LEDs are compatible with this dimmer.</p> <p>Available via QR code or online at <a href="http://www.ehmann-gmbh.de">www.ehmann-gmbh.de</a></p> 	<p>Connection diagram as intermediate or end device</p> 
<p>Item-no. 2600x0750(i) (transparent)    EAN 401209600514 8    PU 10</p> <p>Item-no. 2620x0750(i) (black)    EAN 401209600510 0    PU 10</p> <p>Item-no. 2660x0750(i) (white)    EAN 401209600603 9    PU 10</p>	<p>130 x 59 x 35 mm Dimensions (L x W x H)</p>	