


ALGAE M PD

696-001020323730v1


ALGAE SUSPENSION made of aluminium, chalk, similar to RAL 7030, beam 38°, light output direct, max. 700mA, cable black, soft-touch, adapter/ceiling base chalk, pendant length 1500mm, IP20



DRAWING

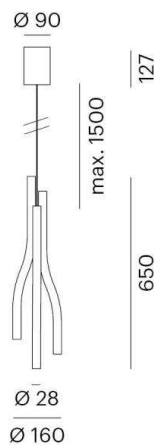

LIGHT DISTRIBUTION CURVE

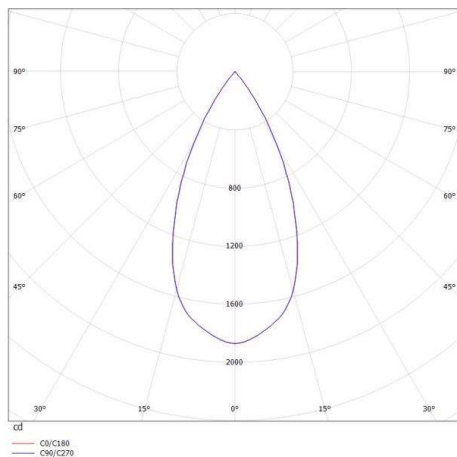

TECHNICAL DETAILS

| | |
|----------------------------|---|
| System perform. [W] | 14 |
| Bulb type | LED |
| Luminous flux [lm] | 1220 |
| Current sec. [mA] | 700 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Optics | vacuum deposited synthetic reflector Rainer Mutsch |
| Designer | direct |
| Light output | 38° |
| Beam angle [°] | 220-240V 50/60Hz |
| Voltage [V] | aluminium |
| Material | |
| | 140 |
| Length [mm] | 650 |
| Height [mm] | 1500 |
| Pendant length [mm] | 160 |
| Diameter [mm] | IP20 |
| IP protection class | protection cl. I |
| Voltage class | 0,66 |
| Net weight [kg] | |
| | chalk |
| Color lamp | 7030 |
| RAL | chalk |
| Color adapter/ceiling base | black, soft-touch |
| Electric wire | 9010506238570 |
| EAN-Number | 50 000 L80 B10 |
| Lifetime [h] | 50 |
| No. of luminaires B16A | |

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.