


TURN ON SD

681-00100002365d

TURN ON DC WALL / CEILING LUMINAIRE made of aluminium, black white, similar to RAL 9005, sated PMMA opal diffuser beam 90°, light output direct, max. 350mA, dimmable DALI, IP20



DRAWING

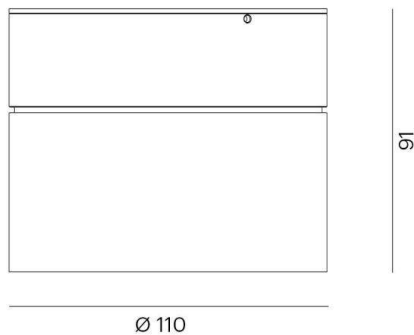


TECHNICAL DETAILS

System perform. [W]	7
Bulb type	LED
Luminous flux [lm]	470
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Dimming	DALI
Light output	direct
Beam angle [°]	90°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Height [mm]	91
Diameter [mm]	110
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,66

LIGHT DISTRIBUTION CURVE

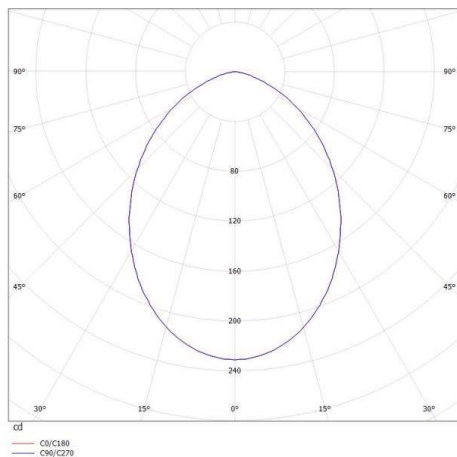

Color lamp	black white
RAL	9005
EAN-Number	9008905808364
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	A++-A
No. of luminaires B16A	30

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.