

Luminaire

Code T081300
Name CICLOPE terra 50 bilaterale 6W 3000K grigio bianco

Measurem.

Code FDS0000978
Name CICLOPE terra 50 bilaterale 6W 3000K grigio bianco

Luminaire Flux	765.44 lm	Luminaire Power	13.00 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	765.44 lm	Maximum value	251.23 cd/klm	Position	C=90.00 G=60.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	50 mm 90 mm	Width Height	170 mm 0 mm	Height	1 mm	
Horizontal Luminous Area	0.006362 m2		Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.001539 m2			
Coordinate system	CG		Symmetry Type	Double Symmetrical			
Date	17-05-2013		Maximum Gamma Angle	180			
Measurement Distance	0.00		Measurement Flux	765.44 lm			


LED Flux=1190,6lm LED Power=10W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 23 52 79 79 100
F UTE 0.79 J + 0.21 T

D DIN 5040
B NBN


B11
BZ 9 / 0.8 / BZ 8 / 2.5 / BZ 7

50mm x 170mm



Semipiani C
180.0 ——— 0.0
270.0 - - - - 90.0

ULOR 21.03 %
DLOR 78.97 %
RN 21.03 %

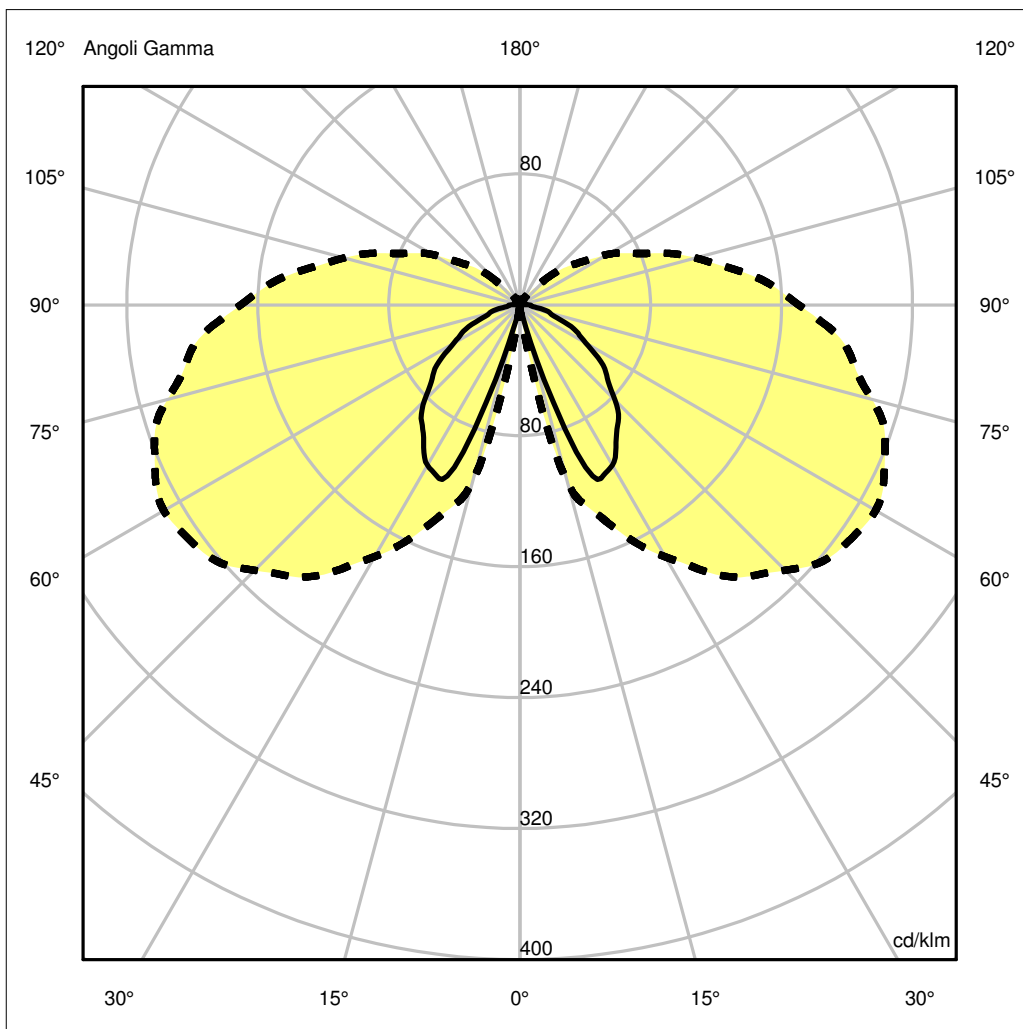

Luminaire							
Code	T081300						
Name	CICLOPE terra 50 bilaterale 6W 3000K grigio bianco						
Measurem.							
Code	FDS0000978						
Name	CICLOPE terra 50 bilaterale 6W 3000K grigio bianco						
Luminaire Flux	765.44 lm	Luminaire Power	13.00 W	Efficacy	58.88 lm/W	Efficiency	100.00%
Lamps Flux	765.44 lm	Maximum value	251.23 cd/klm	Position	C=90.00 G=60.00	CG Double Symmetrical	
Rectangular Luminaire	Length		50 mm	Width	170 mm	Height	1 mm
Round Luminous Area	Diam.		90 mm	Height	0 mm		
Horizontal Luminous Area	0.006362 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001539 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	17-05-2013			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	765.44 lm		
LED Flux=1190,6lm LED Power=10W Eff=64% EfcLed=119lm/W EfcLum=59lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	23 52 79 79 100			D DIN 5040	B11		
F UTE	0.79 J + 0.21 T			B NBN	BZ 9 / 0.8 / BZ 8 / 2.5 / BZ 7		

Could not find 90270 right beam angle•gamma0180=25

Could not find 90270 right beam angle•gamma0180=25

Could not find 90270 right beam angle•gamma0180=25