

## Mini Series

# Constant Current LED Driver


LED恒流驱动器

## Features:

- Super compact design
- Driver for built-in use
- Universal AC input
- Input and output terminal blocks on the same side
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II



- 紧凑型设计
- 内置式驱动运用
- 全电压输入规格AC100-240V
- 同侧输入和输出端接线端子
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II

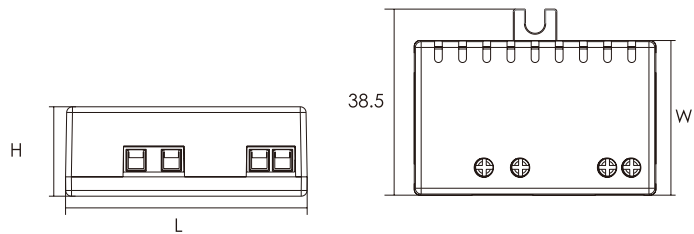

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 LxWxH (mm)	Weight 重量 (g)
MINI160mA/6W	100-240	6	160	12-38	0.40C	80	<0.3	-20...+50	80	SELV	50x38.5x18.5	30
MINI350mA/6W	100-240	6	350	3-17	0.40C	80	<0.3	-20...+50	80	SELV	50x38.5x18.5	30
MINI500mA/6W	100-240	6	500	3-12	0.40C	79	<0.3	-20...+50	80	SELV	50x38.5x18.5	30
MINI700mA/6W	100-240	6	700	3-8	0.40C	73	<0.3	-20...+50	80	SELV	50x38.5x18.5	30


**CB CE**