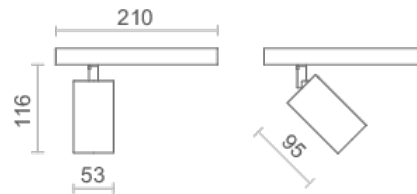


754-789-21 MICROPERFETTO 26W 30K 30° PWM BI**Code: 754-789-21**

Low-voltage 48V electrified track spotlight designed for high-efficiency COB LEDs. It is equipped with reflector.

**General specifications**

| | |
|-----------------------------|--|
| Designer | Ivela Design Team |
| Commercial brand | Microperpetto |
| Installation environment | Interior |
| Native mounting type | Track mounted |
| Mounting type | Track attachment |
| Ideal application locations | Residential, Hospitality, Showroom, Museum, Office, Commercial space |
| Wire incandescent test | 850 |
| Made in | Italy |

Physical specifications

| | |
|---------------------|-------------|
| Shape | Cylindrical |
| Body material | Aluminum |
| Body finish | Matte |
| Body color | White |
| Frontal material | Aluminum |
| Frontal finish | Matte |
| Thermal dissipation | Passive |
| IP | IP20 |

Lighting specifications

| | |
|---------------------|------|
| N° of light sources | 1 |
| Lumen | 1890 |
| L.O.R. (%) | 70 |

Ivela Srl

Via B. Buozzi 15 - 20050 Liscate (Milano)
Tel. +39 02 9500121 - info@ivela.it - www.ivela.it

| | |
|--------------|--------|
| Power | 26 |
| Light type | White |
| CCT | 3000K |
| CRI | 90 |
| SDCM | 3 |
| RG | RG1 |
| Life time | L80B10 |
| LB value @ h | 50000 |

Optical specifications

| | |
|---------------------------|---|
| Emission type | Direct monoemission |
| Beam | 30 |
| Optics type | Mirror metallized thermoplastic reflector |
| Optical diffuser finish | Metallized |
| Optical diffuser material | Termoplastic |
| Orientability | Adjustable |
| Rotation degrees | 355 |
| Swivel degrees (°) | 90 |

Electrical specifications

| | |
|---------------------------------|----------------------------------|
| Power supply availability | Not included |
| Power supply position | Internal |
| CV / CC converter availability | Included |
| CV / CC converter position | Internal |
| Dimmable | Yes |
| Dimmer availability | Not included |
| Dimming type | ON/OFF |
| Dimmer position | Remote |
| Power supply voltage type | DC |
| Power supply type | Voltage |
| Input Voltage (V) | 48 |
| Insulation class | III |
| Light source type | LED COB |
| Energy efficiency class | E |
| Replaceable power supply system | Replaceable by skilled personnel |
| Replaceable light source | Replaceable by skilled personnel |

Dimensions and weight

| | |
|-------------|-----|
| Length (mm) | 210 |
|-------------|-----|

Diameter (mm) **53**

General conditions

Warranty **5 years**
