


Luminaire

Code 1409020A
Name GOPLE LAMP T MINI BIANCO SFUMATO

Measurment

Code FTS1900822
Name GOPLE LAMP T MINI BIANCO SFUMATO

Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=200.00 G=161.00	CG	Asymmetrical
Round Luminaire Round Luminous Area	Diam. 150 mm Diam. 150 mm	Height	296 mm	Height	296 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.017671 m2 0.044400 m2 0.044400 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°				0.044400 m2 0.044400 m2 0.047356 m2	
Coordinate system Date Measurement Distance	CG 22-01-2019 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux				Asymmetrical 180 470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E. F UTE	14 37 66 35 94 --	D DIN 5040 B NBN		D12 BZ 10			

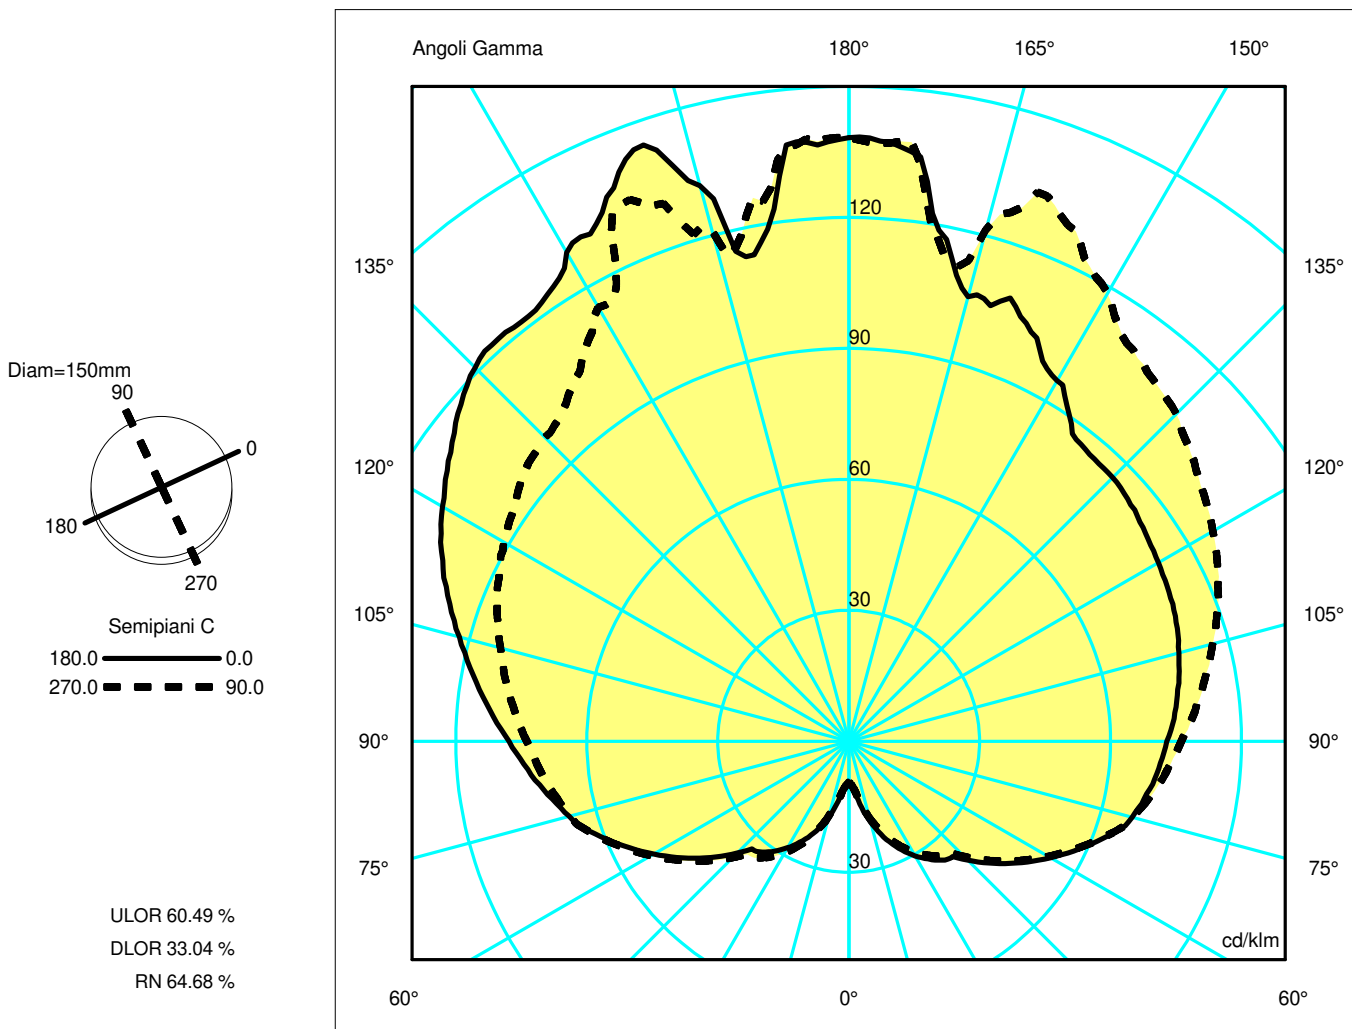

Luminaire

Code 1409020A
Name GOPLE LAMP T MINI BIANCO SFUMATO

Measur.

Code FTS1900822
Name GOPLE LAMP T MINI BIANCO SFUMATO

Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=200.00 G=161.00	CG	Asymmetrical
Round Luminaire		Diam.	150 mm	Height	296 mm		
Round Luminous Area		Diam.	150 mm	Height	296 mm		
Horizontal Luminous Area		0.017671 m2		Emitting area on Plane 180°		0.044400 m2	
Emitting area on Plane 0°		0.044400 m2		Emitting area on Plane 270°		0.044400 m2	
Emitting area on Plane 90°		0.044400 m2		Glare area at 76°		0.047356 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		22-01-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	14 37 66 35 94			D DIN 5040	D12		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =-19

Apertura a destra non trovata, gamma =-19

Apertura a destra non trovata, gamma =-19