



WEVER & DUCRÉ  
LIGHTING

# BENTO 1.3

309274W5

Project
Type
Notes
Quantity
Date

## GENERAL

Wall  
 Surface  
 Signal White  
 IP20  
 Interior  
 335 lm  
 9003<sup>a</sup>

## LED

3000 K  
 CRI 90  
 L95 / 50000 h  
 3-step binning

## OPTICAL

Wide Flood



## PHYSICAL

Length 180 mm  
 Width 130 mm  
 Height 46 mm  
 0.74 kg


## ELECTRICAL

incl. PS | phase-cut dim  
 220 - 240 V  
 Total connected power 8 W  
 PC1  
 Safety distance 0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.

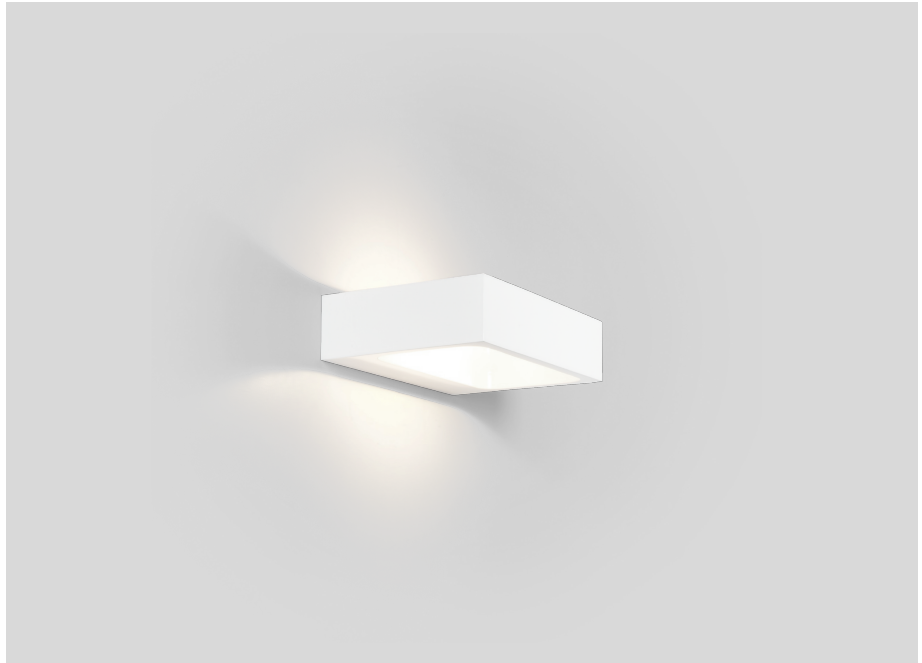

## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# BENTO 1.3

309274W5

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.97	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.