


Luminaire

Code 1202t00A
Name Alphabet of light - t

Measur.

Code FTS1700181
Name Alphabet of light - t

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|------------------|-------------------------|---------|
| Luminaire Flux | 1006.00 lm | Luminaire Power | 17.00 W | Efficacy | 59.18 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1006.00 lm | Maximum value | 138.19 cd/klm | Position | C=180.00 G=90.00 | CG Sym. on planes 0-180 | |
| Rectangular Luminaire | | Length | 360 mm | Width | 50 mm | Height | 960 mm |
| Rectangular Luminous Area | | Length | 360 mm | Width | 50 mm | Height | 960 mm |
| Horizontal Luminous Area | | 0.018000 m2 | | Emitting area on Plane 180° | | 0.345600 m2 | |
| Emitting area on Plane 0° | | 0.345600 m2 | | Emitting area on Plane 270° | | 0.048000 m2 | |
| Emitting area on Plane 90° | | 0.048000 m2 | | Glare area at 76° | | 0.339689 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Sym. on planes 0-180 | |
| Date | | 05-04-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1006.00 lm | |
| LED Flux=1456,36lm LED Power=17W Eff=69% EfcLed=86lm/W EfcLum=59lm/W Ra=80 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 21 46 73 50 100 | | | D DIN 5040 | | C11 | |
| F UTE | 0.50 J + 0.50 T | | | B NBN | | BZ 9 | |

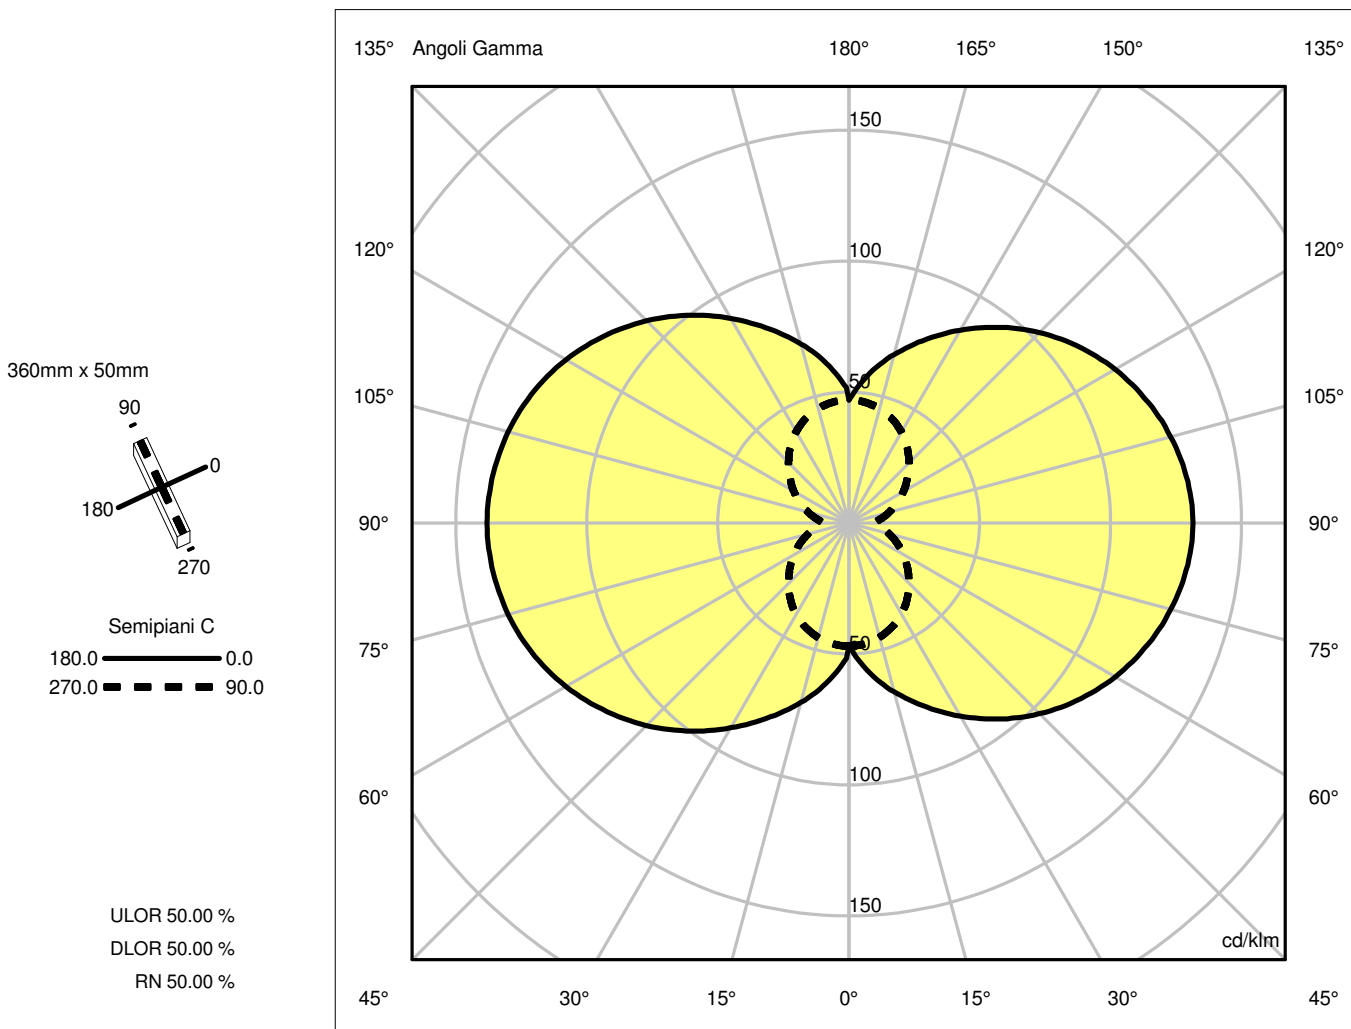

| | | | | | | | |
|--|-----------------------|-----------------|---------------|-----------------------------|------------------|-------------------------|---------|
| Luminaire | | | | | | | |
| Code | 1202t00A | | | | | | |
| Name | Alphabet of light - t | | | | | | |
| Measur. | | | | | | | |
| Code | FTS1700181 | | | | | | |
| Name | Alphabet of light - t | | | | | | |
| Luminaire Flux | 1006.00 lm | Luminaire Power | 17.00 W | Efficacy | 59.18 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1006.00 lm | Maximum value | 138.19 cd/klm | Position | C=180.00 G=90.00 | CG Sym. on planes 0-180 | |
| Rectangular Luminaire | | Length | 360 mm | Width | 50 mm | Height | 960 mm |
| Rectangular Luminous Area | | Length | 360 mm | Width | 50 mm | Height | 960 mm |
| Horizontal Luminous Area | | 0.018000 m2 | | Emitting area on Plane 180° | | 0.345600 m2 | |
| Emitting area on Plane 0° | | 0.345600 m2 | | Emitting area on Plane 270° | | 0.048000 m2 | |
| Emitting area on Plane 90° | | 0.048000 m2 | | Glare area at 76° | | 0.339689 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Sym. on planes 0-180 | |
| Date | | 05-04-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1006.00 lm | |
| LED Flux=1456,36lm LED Power=17W Eff=69% EfcLed=86lm/W EfcLum=59lm/W Ra=80 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 21 46 73 50 100 | | | D DIN 5040 | C11 | | |
| F UTE | 0.50 J + 0.50 T | | | B NBN | BZ 9 | | |

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90