

Luminaire


Code 0455020A
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Measurement

Code FTS0002516
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Luminaire Flux	4916.51 lm	Luminaire Power	105.00 W	Efficacy	46.82 lm/W	Efficiency	86.25%
Lamps Flux	5700.00 lm	Maximum value	118.80 cd/klm	Position	C=255.00 G=35.00	CG	Asymmetrical
Rectangular Luminaire		Length	400 mm	Width	1000 mm	Height	340 mm
Rectangular Luminous Area		Length	400 mm	Width	1000 mm	Height	340 mm
Horizontal Luminous Area		0.400000 m2		Emitting area on Plane 180°		0.136000 m2	
Emitting area on Plane 0°		0.136000 m2		Emitting area on Plane 270°		0.340000 m2	
Emitting area on Plane 90°		0.340000 m2		Glare area at 76°		0.228729 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5700.00 lm	
64548 A ES FR							
C.I.E.	31 54 77 55 86			D DIN 5040	C21		
F UTE	0.48 H + 0.39 T			B NBN	BZ 7		


400mm x 1000mm



Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 38.54 %
DLOR 47.72 %
RN 44.68 %

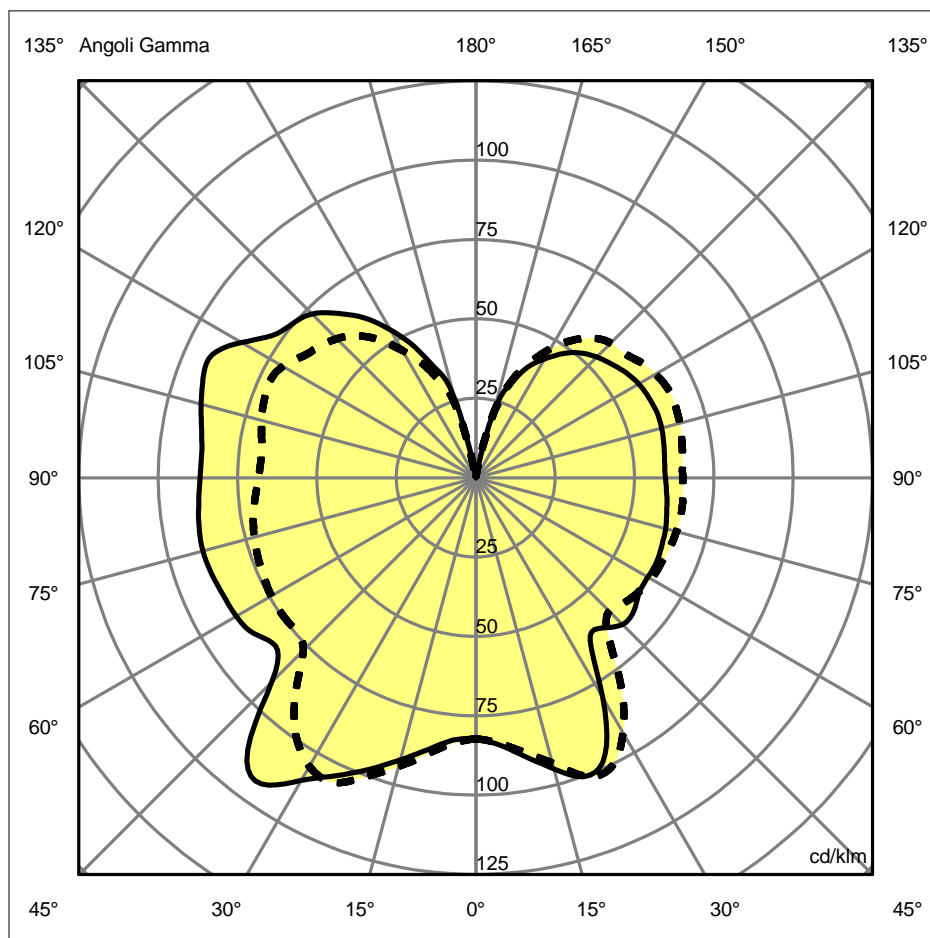

Luminaire

Code 0455020A
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Measur.

Code FTS0002516
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Luminaire Flux	4916.51 lm	Luminaire Power	105.00 W	Efficacy	46.82 lm/W	Efficiency	86.25%
Lamps Flux	5700.00 lm	Maximum value	118.80 cd/klm	Position	C=255.00 G=35.00	CG	Asymmetrical
Rectangular Luminaire		Length	400 mm	Width	1000 mm	Height	340 mm
Rectangular Luminous Area		Length	400 mm	Width	1000 mm	Height	340 mm
Horizontal Luminous Area		0.400000 m2		Emitting area on Plane 180°		0.136000 m2	
Emitting area on Plane 0°		0.136000 m2		Emitting area on Plane 270°		0.340000 m2	
Emitting area on Plane 90°		0.340000 m2		Glare area at 76°		0.228729 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		02-09-2002		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5700.00 lm	
64548 A ES FR							
C.I.E.	31 54 77 55 86			D DIN 5040	C21		
F UTE	0.48 H + 0.39 T			B NBN	BZ 7		

Apertura a destra non trovata, gamma =-36

Apertura a destra non trovata, gamma =-36

Apertura a destra non trovata, gamma =-36

Luminaire

Code 0455020A
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Measurerm.

Code FTS0002516
Name LOGICO SOSPENSIONE 3 IN LINEA SETA

Luminaire Flux	4916.51 lm	Luminaire Power	105.00 W	Efficacy	46.82 lm/W	Efficiency	86.25%
Lamps Flux	5700.00 lm	Maximum value	118.80 cd/klm	Position	C=255.00 G=35.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	9.9	10.9	10.8	11.8	11.4	8.5	9.5	9.4	10.3	11.4
x=2H y=3H	13.1	14.0	13.9	14.8	14.0	11.1	12.0	12.0	12.9	14.0
x=2H y=4H	14.8	15.6	15.6	16.5	15.3	12.5	13.3	13.3	14.2	15.3
x=2H y=6H	16.5	17.3	17.4	18.2	16.6	13.8	14.6	14.7	15.5	16.6
x=2H y=8H	17.4	18.1	18.3	19.0	17.3	14.5	15.2	15.4	16.2	17.3
x=2H y=12H	18.2	19.0	19.2	19.9	18.0	15.2	15.9	16.1	16.8	18.0
x=4H y=2H	10.4	11.3	11.3	12.2	12.3	9.5	10.3	10.3	11.2	12.3
x=4H y=3H	13.7	14.4	14.6	15.4	14.9	12.1	12.8	13.0	13.8	14.9
x=4H y=4H	15.5	16.2	16.5	17.1	16.4	13.6	14.2	14.5	15.2	16.4
x=4H y=6H	17.4	18.0	18.4	19.0	17.9	15.1	15.7	16.0	16.6	17.9
x=4H y=8H	18.4	19.0	19.4	19.9	18.6	15.9	16.4	16.8	17.3	18.6
x=4H y=12H	19.4	19.9	20.4	20.9	19.3	16.6	17.1	17.6	18.1	19.3
x=8H y=4H	15.9	16.4	16.8	17.3	16.9	14.2	14.7	15.2	15.7	16.9
x=8H y=6H	17.9	18.4	18.9	19.3	18.6	15.9	16.3	16.9	17.3	18.6
x=8H y=8H	18.9	19.3	19.9	20.3	19.4	16.8	17.2	17.8	18.2	19.4
x=8H y=12H	20.1	20.4	21.1	21.4	20.3	17.7	18.0	18.7	19.0	20.3
x=12H y=4H	15.9	16.4	16.9	17.3	17.0	14.3	14.8	15.3	15.8	17.0
x=12H y=6H	18.0	18.4	19.0	19.4	18.8	16.1	16.5	17.1	17.5	18.8
x=12H y=8H	19.1	19.4	20.0	20.4	19.7	17.1	17.4	18.1	18.4	19.7