




SLC DL04 SURFACE X1 R83 BL 703TED 930 IP21 36°

14/01/2022

SLC1223



Product description

The DL04 Surface X1 is an angular, tiltable surface-mounted luminaire with a contemporary design. Experience pleasant light with low glare and plenty of lumens.

- Delivery complete with driver
- Deep LED for a pleasant light UGR <22
- Angular swivel surface-mounted luminaire in contemporary design
- Quick coupling with loop-in / loop-out
- CRI >90 enhances vivid colors in any environment
- Delivers plenty of light
- 16mm cable tube



Technical data


Suitable for surface mounting	Yes
Adjustability	Rotating and swivelling
With light source	Yes
Colour housing	Black
Voltage type	AC
LED nominal current at constant current	200 - 200 mA
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h

Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Material cover	Plastic, transparent
Nominal voltage	220 - 240 V
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct
Degree of protection (IP)	IP21




Protection class	I
Max. system power	8 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	703 lm
Width	135 mm
Length	135 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm ²
Luminaire efficacy	95 lm/W
Strain relief	Yes
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	95 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm ²
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065412

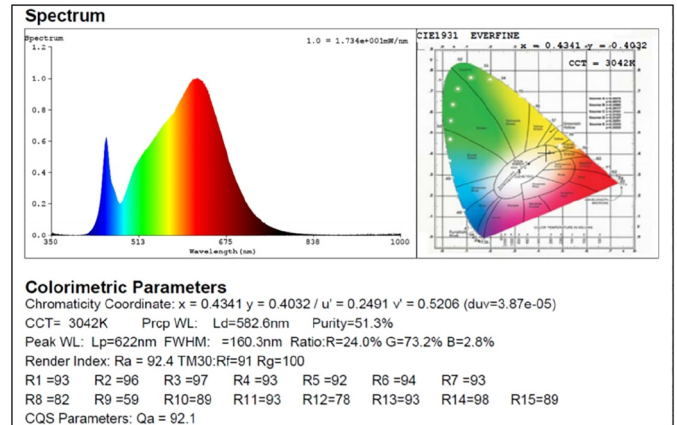



 **ENERG** 


Scandinavian Lighting Concept
SLC1223


A 


B 

C 

D 

E 

F  

G 

7
kWh/1000h

 2019/2015

