


TNL 22.1640.02/DALI

Trentino II Pendant (1xLED 156W 840/4000K 11630lm)

— C0/C180 cd / 1000 lm - - - C90/C270

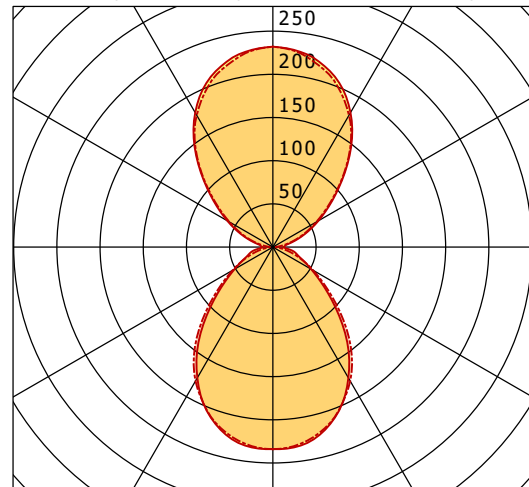

	C0	C90	C180	C270
0°	234	234	234	234
30°	175	179	175	179
60°	51	54	51	54
90°	12	3	12	3
120°	61	58	61	58
150°	180	176	180	176
180°	232	232	232	232
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	75 lm/W
Direct/Indirect	↓ 49% / ↑ 51%
System Power	156 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.8
UGR C90/C270	18.3
CIE Flux Codes	58 84 96 49 100
Ra/CRI	> 80