



WEVER & DUCRÉ  
LIGHTING

# MILES 3.0 ROUND

31774W5

Project
Type
Notes
Quantity
Date

## GENERAL

Wall  
 Surface  
 Signal White  
 IP20  
 Interior  
 365 lm  
 9003<sup>a</sup>

## LED

3000 K  
 CRI 90  
 L80 / 50000 h  
 3-step binning

## OPTICAL

wide flood



## PHYSICAL

Diameter 260 mm  
 Height 37 mm  
 1.1 kg


## ELECTRICAL

phase-cut dim  
 220 - 240 V  
 Total connected power 8.4 W  
 PC2  
 Safety distance 0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.

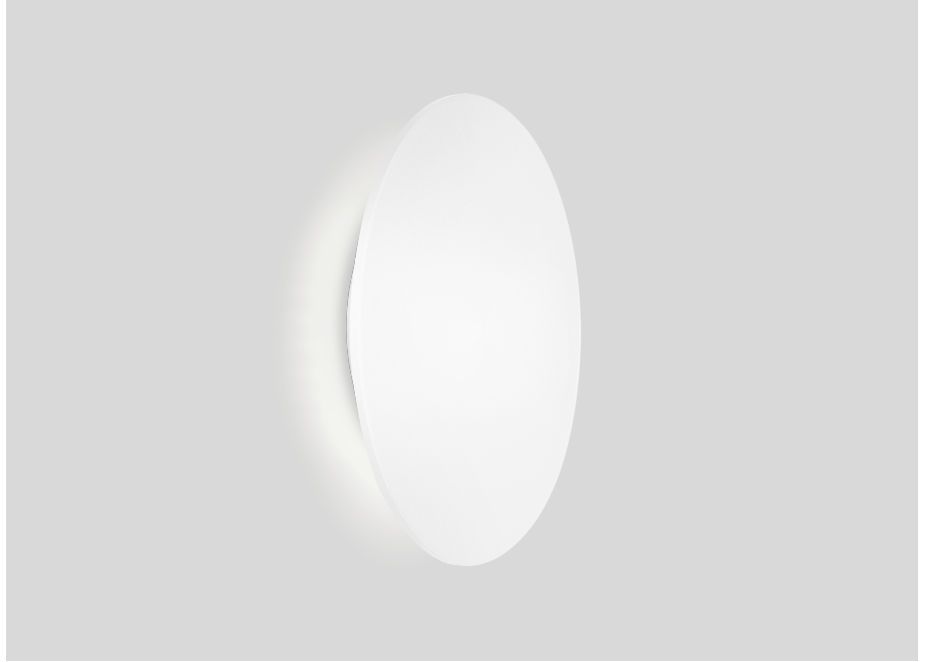

## LIGHT DISTRIBUTION





**WEVER & DUCRÉ**  
LIGHTING

# MILES

## 3.0 ROUND

317774W5

### Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.84	0.8
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.