

## Luminaire


Code 1202r00A  
Name Alphabet of light - r

## Measurem.

Code FTS1700179  
Name Alphabet of light - r

Luminaire Flux	791.00 lm	Luminaire Power	14.00 W	Efficacy	56.50 lm/W	Efficiency	100.00%
Lamps Flux	791.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	660 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	660 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.435600 m2	
Emitting area on Plane 0°		0.435600 m2		Emitting area on Plane 270°		0.033000 m2	
Emitting area on Plane 90°		0.033000 m2		Glare area at 76°		0.430644 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		791.00 lm	
LED Flux=1144,24lm LED Power=14W Eff=69% EfcLed=82lm/W EfcLum=56lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040		C11	
F UTE	0.50 J + 0.50 T			B NBN		BZ 9	


660mm x 50mm



Semipiani C

180.0 ——— 0.0  
270.0 - - - - 90.0

ULOR 50.00 %  
DLOR 50.00 %  
RN 50.00 %

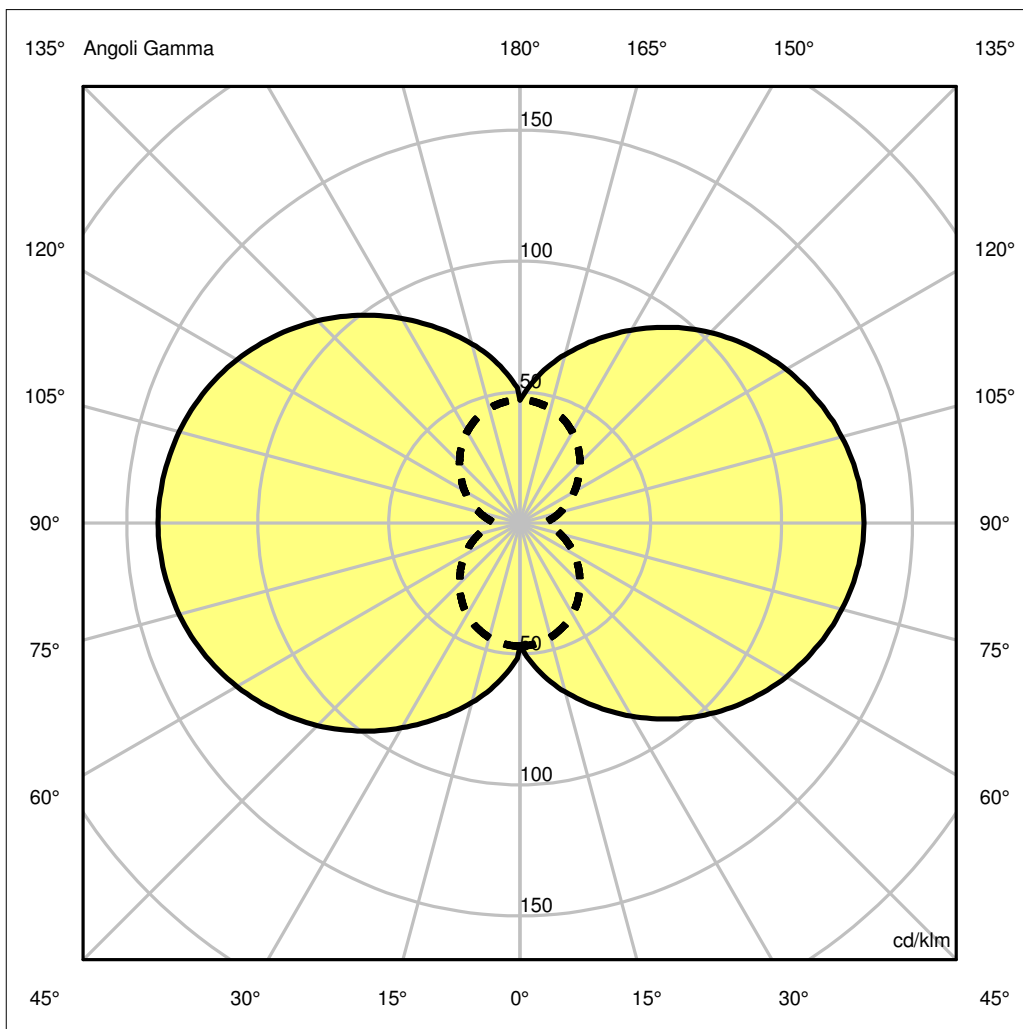

<b>Luminaire</b>							
Code	1202r00A						
Name	Alphabet of light - r						
<b>Measur.</b>							
Code	FTS1700179						
Name	Alphabet of light - r						
Luminaire Flux	791.00 lm	Luminaire Power	14.00 W	Efficacy	56.50 lm/W	Efficiency	100.00%
Lamps Flux	791.00 lm	Maximum value	138.19 cd/klm	Position	C=180.00 G=90.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	660 mm	Width	50 mm	Height	660 mm
Rectangular Luminous Area		Length	660 mm	Width	50 mm	Height	660 mm
Horizontal Luminous Area		0.033000 m2		Emitting area on Plane 180°		0.435600 m2	
Emitting area on Plane 0°		0.435600 m2		Emitting area on Plane 270°		0.033000 m2	
Emitting area on Plane 90°		0.033000 m2		Glare area at 76°		0.430644 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		05-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		791.00 lm	
LED Flux=1144,24lm LED Power=14W Eff=69% EfcLed=82lm/W EfcLum=56lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	21 46 73 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90