


(LUMN) SOSPENSIONE 39W LED
(CACU)
(TS) 39W LED (TOLU) 2250

(CAP) SPOKES LED H750mm
(IDNM) 2015000312-313 / Studio Oleandri
(PLA)

DIAGRAMMA POLARE (cd/klm)

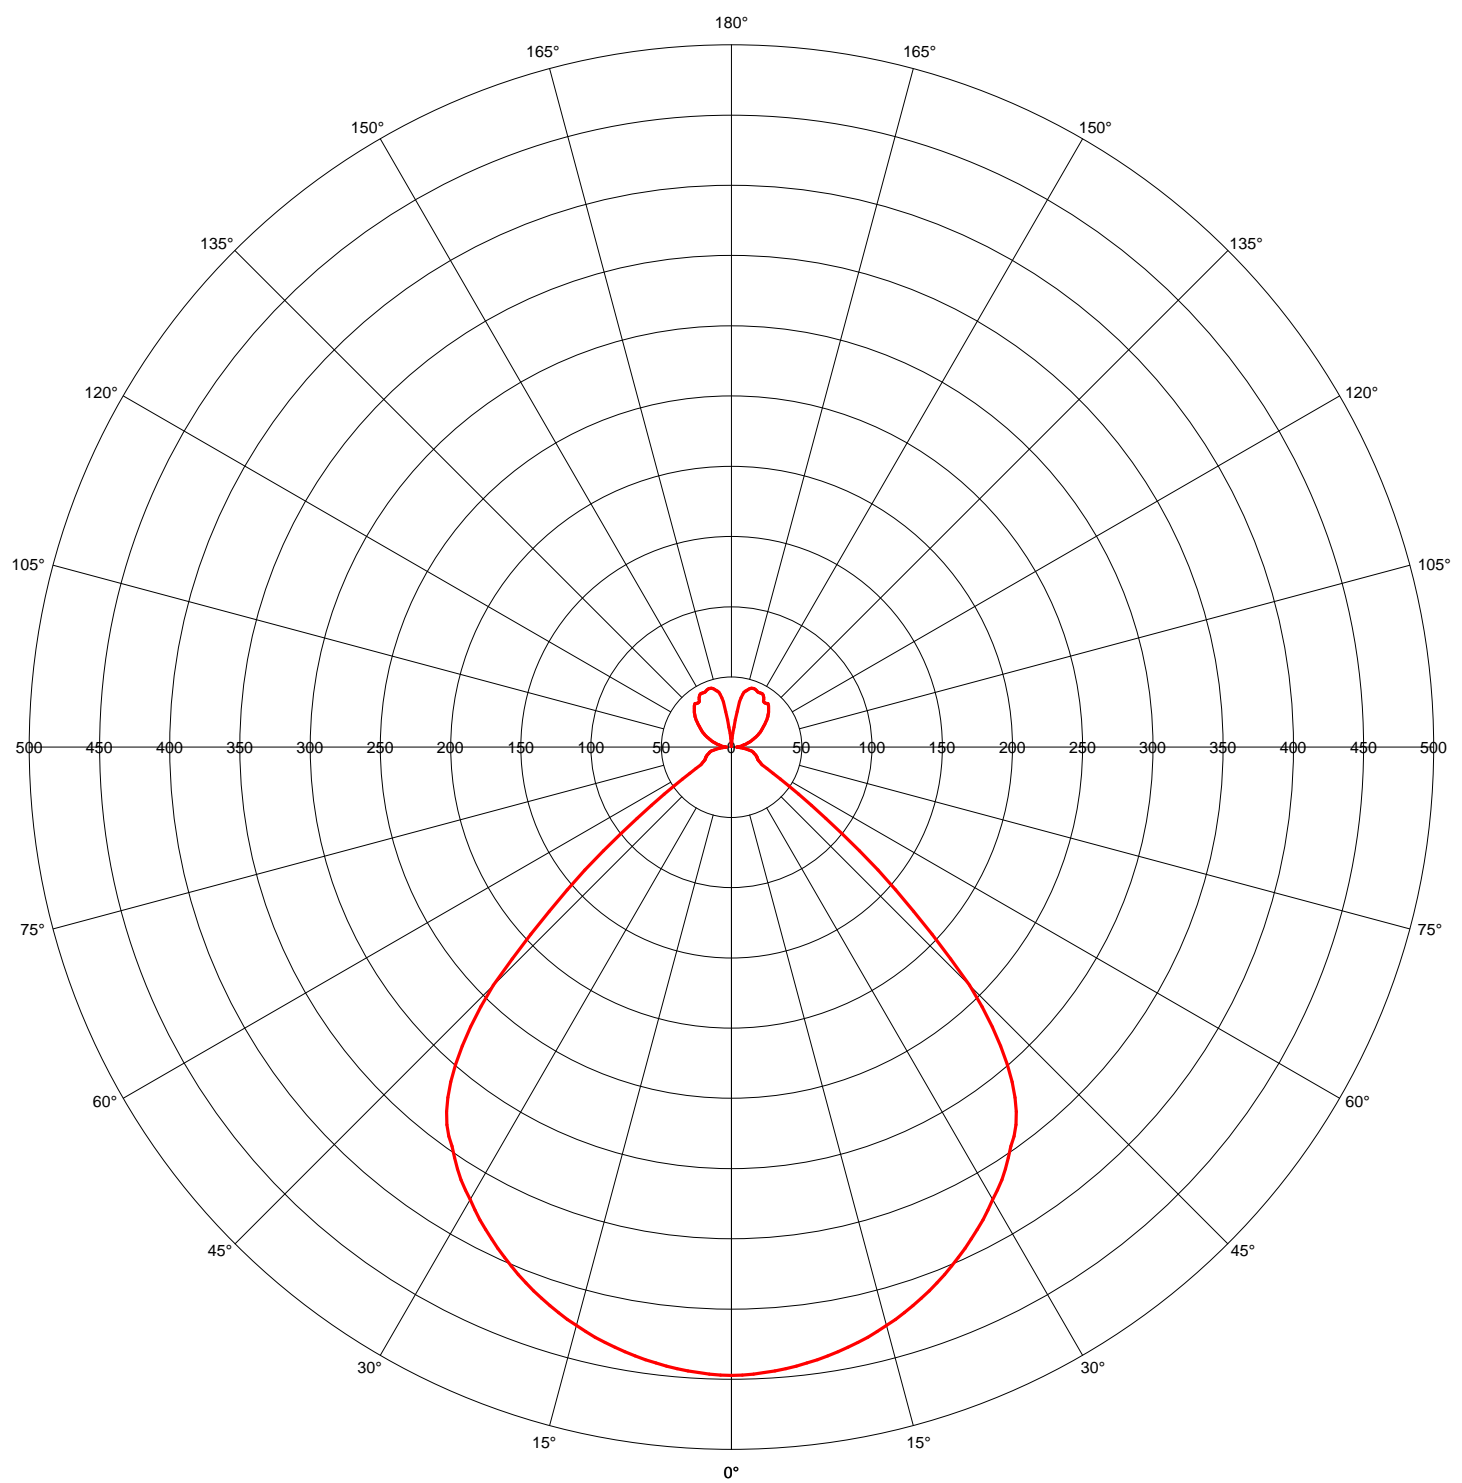

C = 0-180°

Codice CIE: 70 94 98 84 100
 Rendimento: LOR = 100,0; DLOR = 84,4; ULOR = 15,6
 Apertura fascio: C0-180 = 90,0°; C90-270 = 90,0°
 Asimmetria: IMax = 447,3 cd/klm; C = 0,0°; gamma = 0,0°
 Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°