

**SLC DL04 SURFACE X2 BL 1435TED 927 IP21 36°**

14/01/2022

**SLC1229****Product description**

The DL04 Surface X2 is an angular, tiltable surface-mounted luminaire with a contemporary design. Experience pleasant light with low glare and plenty of lumen.

Delivery complete with driver  
 Deep LED for a pleasant light UGR <22  
 Angular swivel surface-mounted luminaire in contemporary design  
 Quick coupling with loop-in / loop-out  
 CRI >90 enhances vivid colors in any environment  
 Delivers plenty of light  
 16mm cable tube

**Technical data**

Suitable for surface mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, transparent
LED nominal current at constant current	400 - 400 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct


Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	Black
Voltage type	AC/DC
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h






Degree of protection (IP)	IP21
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	15,1 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm <sup>2</sup>
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

Protection class	I
Max. system power	16 W
Colour temperature	2700 - 2700 K
Rated luminous flux according to IEC 62722-	1435 lm
Width	135 mm
Length	224 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm <sup>2</sup>
Luminaire efficacy	95 lm/W
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065474

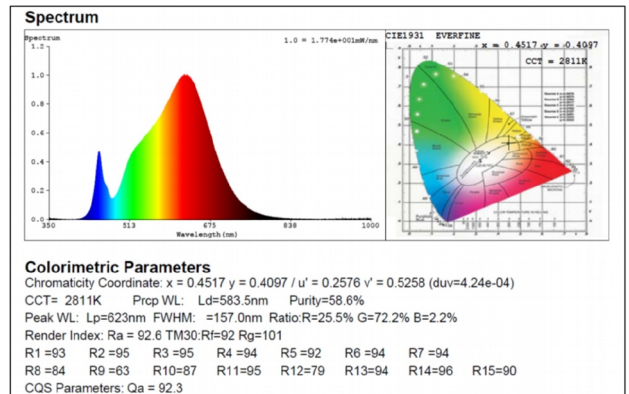




 **ENERG** 


Scandinavian Lighting Concept  
SLC1229

---



A 


B 

C 

D 

E 

F  

G 

---

**15**  
kWh/1000h

 2019/2015

