

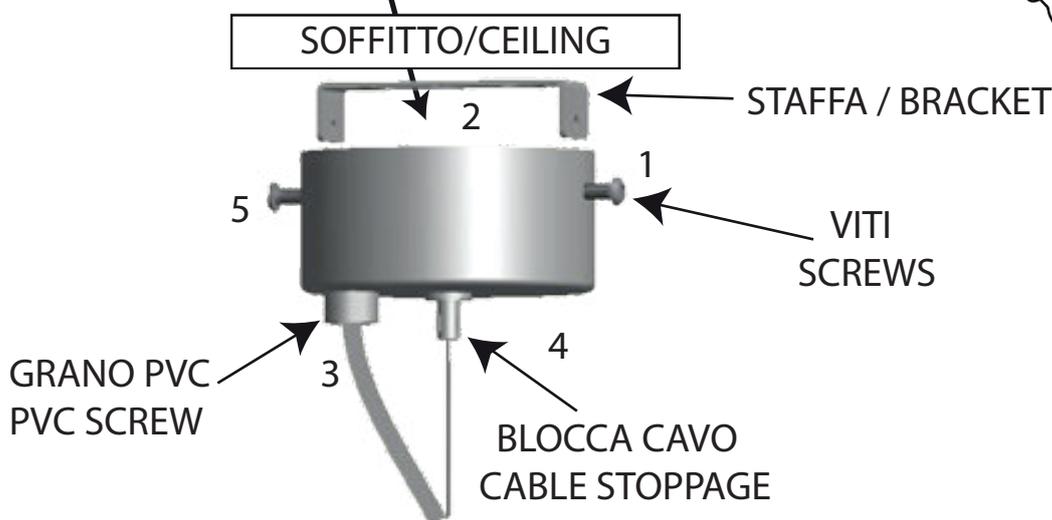


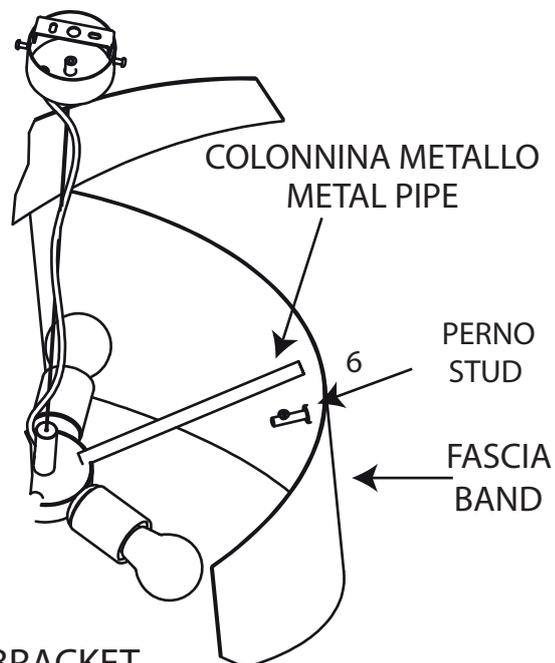

OFF

ELLA



- 1 - Svitare le due viti della staffa.
- 2 - Fissare la staffa a muro e fare i collegamenti elettrici.
- 3 - Svitare il grano in pvc per regolare la lunghezza del cavo elettrico e poi avvitare nuovamente.
- 4 - Per regolare la lunghezza del cavo d'acciaio, svitare la ghiera blocca cavo, far scorrere il cavo d'acciaio e bloccare la ghiera.
- 5 - Avvitare il rosone alla staffa con le due viti precedentemente rimosse.
- 6 - Inserire il perno della fascia all'interno della colonnina in metallo del portalampade ed avvitare la vite.



- 1 - Unscrews the two screws.
- 2 - Secure the bracket to the wall and connect the electric cables.
- 3 - Unscrew the pvc screw for regulate the leght of the electric cable and screw for secure.
- 4 - To low the eight of the steel cable, unscrew the ring locking cable, slide the steel cable and lock the ring.
- 5 - Screw the screw to the ceiling rose removed before from the bracket.
- 6 - Put the stud of the band inside the metal pipe and screw the screw provided by us.