


TNL 22.1640.03/DALI

Trentino II Pendant (1xLED 156W 840/4000K 13230lm)

— C0/C180 cd / 1000 lm - - - C90/C270

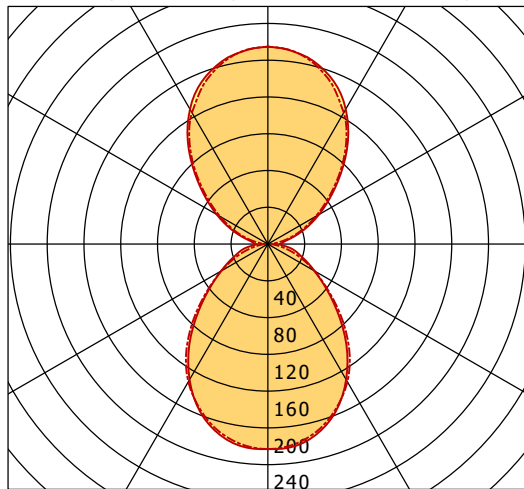

	C0	C90	C180	C270
0°	223	223	223	223
30°	170	173	170	173
60°	59	58	59	58
90°	13	3	13	3
120°	64	60	64	60
150°	169	165	169	165
180°	215	215	215	215
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	85 lm/W
Direct/Indirect	↓ 50% / ↑ 50%
System Power	156 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.1
UGR C90/C270	19.5
CIE Flux Codes	55 82 95 50 100
Ra/CRI	> 80