



## 2091/NE cicala

design emiliana martinelli, 2015

Hanging lamp with direct diffuse light. Structure in aluminium in white, black, yellow or green color, inside diffuser in white opal methacrylate. LED light source integrated. Electronic driver integrated into the stud fixed on the ceiling, in lacquered aluminium lacquered in the same color. On request LED 2700K.

Versions / NE / GI / VE are lacquered soft-touch

### 2091/NE cicala

|                 |  |                     |   |
|-----------------|--|---------------------|---|
| family:         | cicala   | Body Color:         | <input checked="" type="radio"/> other available colors <input type="radio"/> <input type="radio"/> <input type="radio"/> |
| Designers:      | Emiliana Martinelli  | Diffuser Color:     | <input type="radio"/>   |
| Utilization:    | indoor   | Body Materials:     | aluminium   |
| Typology:       | pendant  | Diffuser Materials: | opal white methacrylate   |
| Certifications: |  |                     |   |
| Market:         | This item is available in the following countries:<br>EUROPE |                     |   |

#### Dimensions

|           |       |
|-----------|-------|
| Width:    | -     |
| Height:   | 27 cm |
| Length:   | -     |
| Depth:    | -     |
| Diameter: | 42 cm |

|                |        |
|----------------|--------|
| Hole Diameter: | -      |
| Hole Depth:    | -      |
| Net weight:    | 3,5 Kg |


#### Light Source

|                |         |
|----------------|---------|
| Watt:          | 15W     |
| Lumen:         | 1700 lm |
| Light Source:  | led     |
| CRI:           | >90     |
| duration:      | 50000   |
| CCT:           | 3000K   |
| Energy degree: | A++     |

#### Device Specifications

|                   |        |                     |        |                        |                         |
|-------------------|--------|---------------------|--------|------------------------|-------------------------|
| Type of emission: | direct | Power cable length: | 400 cm | Driver:                | included                |
| Power:            | 17W    | Steel cable length: | 350 cm | Power supply assembly: | external                |
| Light output:     | 1122lm | Glow Wire Test:     | -      | Power supply:          | electronic power supply |
| Beam angle:       | -      | Impact Resistance:  | -      | Type of dimming:       | -                       |
|                   |        |                     |        | Voltage:               | 230V                    |

technical drawing




Dimensions

Width: -  
 Height: 27 cm  
 Length: -  
 Depth: -  
 Diameter: 42 cm


Hole Diameter: -  
 Hole Depth: -  
 Net weight: 3,5 Kg

photometrics data

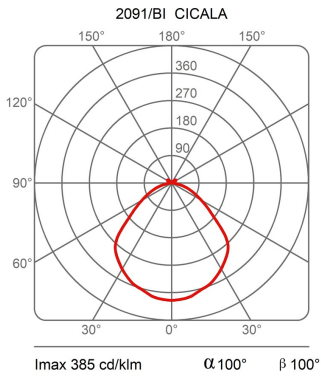

**15W 3783K LED**





| h (m) | Ø         | Em (lux) |
|-------|-----------|----------|
| h1    | 2.4/2.4   | 221      |
| h2    | 4.7/4.7   | 55       |
| h3    | 7.1/7.1   | 25       |
| h4    | 9.5/9.5   | 14       |
| h5    | 11.9/11.9 | 9        |

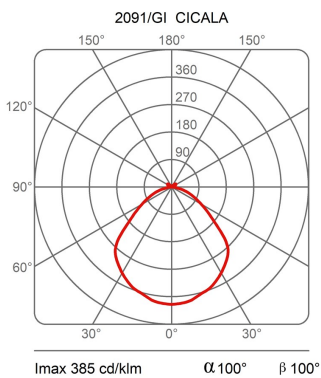

**15W 3783K LED**

| h (m) | Ø         | Em (lux) |
|-------|-----------|----------|
| h1    | 2.4/2.4   | 221      |
| h2    | 4.7/4.7   | 55       |
| h3    | 7.1/7.1   | 25       |
| h4    | 9.5/9.5   | 14       |
| h5    | 11.9/11.9 | 9        |

**2091/NE CICALA**    **15W 3783K LED**

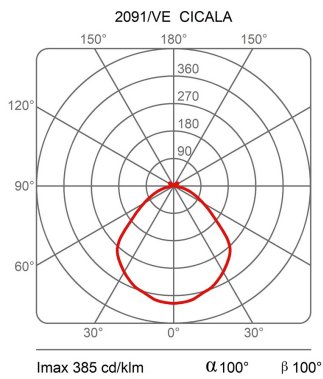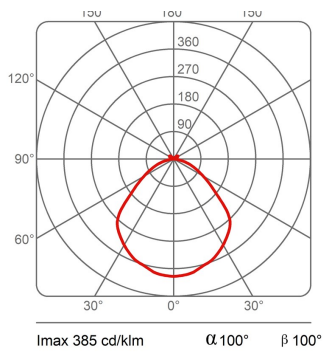



**cicala 2091/NE**

design emiliana martinelli, 2015



