



WEVER & DUCRÉ
LIGHTING

VENN 2.0

149284Q2

Project _____

Type _____

Notes _____

Quantity _____

Date _____

GENERAL

Wall _____

Surface _____

Bronze _____

IP20 _____

Interior _____

Indirect 3030 lm _____

Direct 455 lm _____

Total 3485 lm _____

LED

2700 K _____

CRI 80 _____

L90 / 50000 h _____

3-step binning _____

OPTICAL

Opal _____

PHYSICAL

Length 724 mm _____

Width 724 mm _____

Height 90 mm _____

2.5 kg _____

ELECTRICAL




incl. PS | phase-cut dim _____

220 - 240 V _____


Total connected power 46 W _____

PC1 _____

Safety distance 0.3 m _____

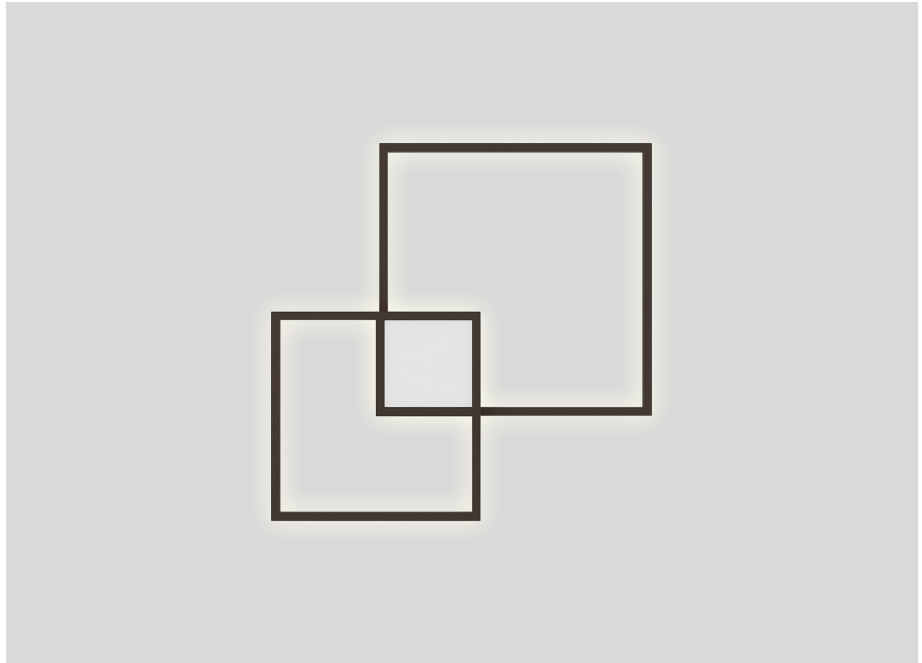

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

VENN 2.0

149284Q2

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.9
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.