


Luminaire

Code 0645020A
Name LOGICO MICRO PLAFONE 3X120°


Measurem.

Code FTS1601223
Name LOGICO MICRO PLAFONE 3X120°

Luminaire Flux	1691.60 lm	Luminaire Power	126.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	1890.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	330 mm	Height	170 mm		
Round Luminous Area		Diam.	330 mm	Height	170 mm		
Horizontal Luminous Area		0.085530 m2		Emitting area on Plane 180°		0.056100 m2	
Emitting area on Plane 0°		0.056100 m2		Emitting area on Plane 270°		0.056100 m2	
Emitting area on Plane 90°		0.056100 m2		Glare area at 76°		0.075125 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		07-03-2004		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1890.00 lm	
HS 42W E14 230V							
C.I.E.	34 56 77 55 90			D DIN 5040		C21	
F UTE	0.49 H + 0.40 T			B NBN		BZ 6 / 1.25 / BZ 7	



ULOR 40.03 %
DLOR 49.48 %
RN 44.72 %

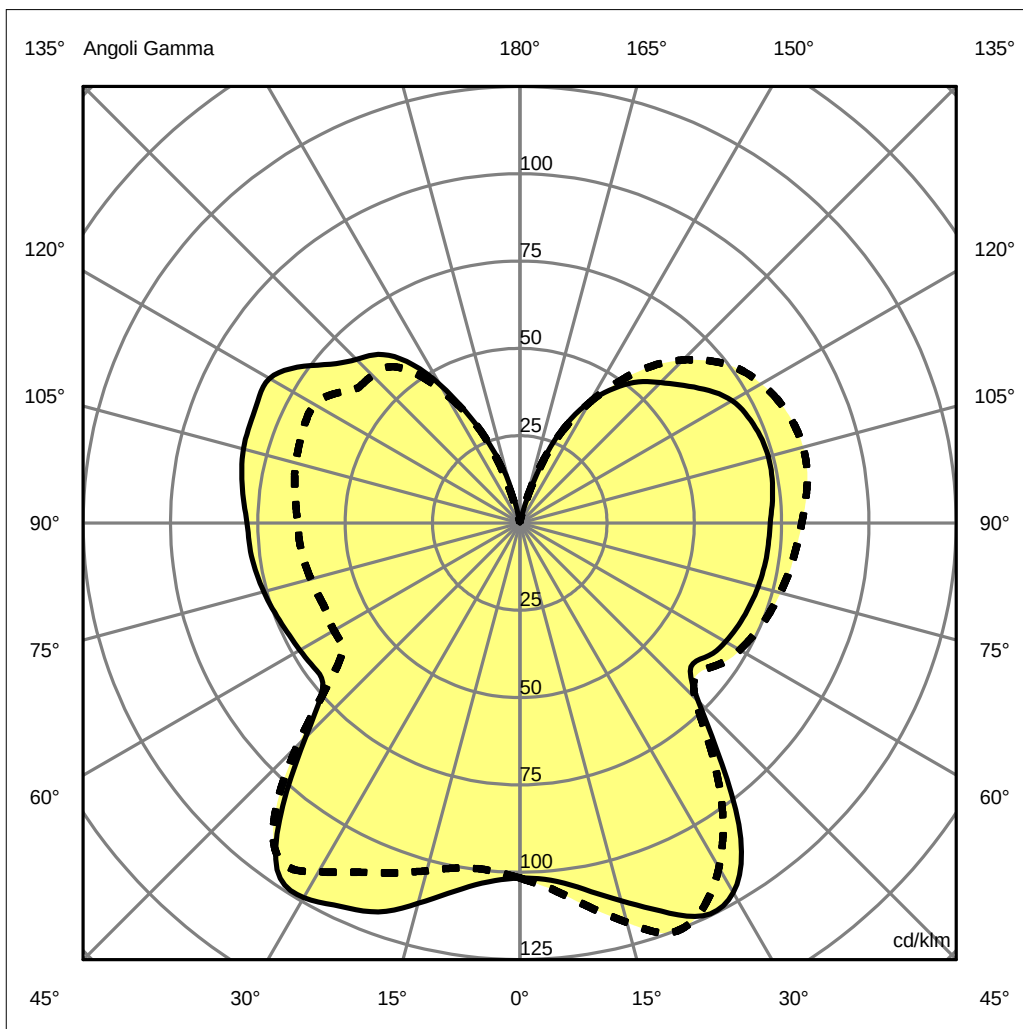

Luminaire

Code 0645020A
Name LOGICO MICRO PLAFONE 3X120°

Measur.

Code FTS1601223
Name LOGICO MICRO PLAFONE 3X120°

Luminaire Flux	1691.60 lm	Luminaire Power	126.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	1890.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	330 mm	Height	170 mm		
Round Luminous Area		Diam.	330 mm	Height	170 mm		
Horizontal Luminous Area		0.085530 m2		Emitting area on Plane 180°		0.056100 m2	
Emitting area on Plane 0°		0.056100 m2		Emitting area on Plane 270°		0.056100 m2	
Emitting area on Plane 90°		0.056100 m2		Glare area at 76°		0.075125 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		07-03-2004		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1890.00 lm	
HS 42W E14 230V							
C.I.E.	34 56 77 55 90			D DIN 5040	C21		
F UTE	0.49 H + 0.40 T			B NBN	BZ 6 / 1.25 / BZ 7		

Apertura a destra non trovata, gamma =27

Apertura a destra non trovata, gamma =27

Apertura a destra non trovata, gamma =27

Luminaire

Code 0645020A
Name LOGICO MICRO PLAFONE 3X120°

Measurment

Code FTS1601223
Name LOGICO MICRO PLAFONE 3X120°

Luminaire Flux	1691.60 lm	Luminaire Power	126.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	1890.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	10.0	11.0	10.9	11.8	12.3	9.5	10.4	10.3	11.3	12.3
x=2H y=3H	12.9	13.7	13.7	14.6	14.9	12.0	12.9	12.9	13.8	14.9
x=2H y=4H	14.4	15.2	15.3	16.1	16.3	13.4	14.2	14.3	15.1	16.3
x=2H y=6H	16.0	16.7	16.9	17.6	17.7	14.9	15.7	15.8	16.6	17.7
x=2H y=8H	16.8	17.5	17.7	18.4	18.5	15.6	16.4	16.5	17.3	18.5
x=2H y=12H	17.6	18.3	18.5	19.2	19.2	16.4	17.1	17.3	18.0	19.2
x=4H y=2H	10.9	11.7	11.8	12.6	13.2	10.3	11.2	11.2	12.0	13.2
x=4H y=3H	13.9	14.6	14.8	15.5	15.9	13.1	13.8	14.0	14.7	15.9
x=4H y=4H	15.5	16.2	16.4	17.1	17.4	14.7	15.3	15.6	16.2	17.4
x=4H y=6H	17.2	17.8	18.2	18.8	19.0	16.3	16.8	17.2	17.8	19.0
x=4H y=8H	18.1	18.6	19.1	19.6	19.8	17.1	17.6	18.1	18.6	19.8
x=4H y=12H	19.0	19.5	20.0	20.5	20.6	17.9	18.4	18.9	19.4	20.6
x=8H y=4H	16.1	16.7	17.1	17.6	18.0	15.3	15.8	16.3	16.8	18.0
x=8H y=6H	18.0	18.5	19.0	19.5	19.8	17.1	17.6	18.1	18.6	19.8
x=8H y=8H	19.1	19.5	20.1	20.5	20.8	18.1	18.5	19.1	19.5	20.8
x=8H y=12H	20.1	20.5	21.1	21.5	21.8	19.1	19.5	20.1	20.5	21.8
x=12H y=4H	16.3	16.8	17.2	17.7	18.1	15.5	15.9	16.4	16.9	18.1
x=12H y=6H	18.3	18.7	19.3	19.7	20.1	17.4	17.8	18.4	18.8	20.1
x=12H y=8H	19.4	19.7	20.4	20.7	21.1	18.4	18.8	19.4	19.8	21.1