

**KALIO SQUARE R**

**308-30023500**

KALIO SQUARE R RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, beam 24°, light output direct, tilting 45°, max. 250mA, IP20




**DRAWING**



45°

1 - 20 mm

86 x 86 mm, **ET 83 mm**

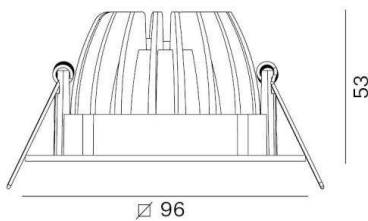

**LIGHT DISTRIBUTION CURVE**


**TECHNICAL DETAILS**

Bulb type	LED 8W
Luminous flux [lm]	860
Current sec. [mA]	250
Colour temp. [K]	2700K
CRI	>90
Light output	direct
Beam angle [°]	24°
Voltage [V]	36 VDC
Material	aluminium
Length [mm]	96
Width [mm]	96
Height [mm]	53
Ceiling cutout [mm]	86x86
Recess depth [mm]	83
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,17

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.

Color lamp  
RAL  
EAN-Number  
Lifetime [h]

white  
9003  
9010506139952  
25 000

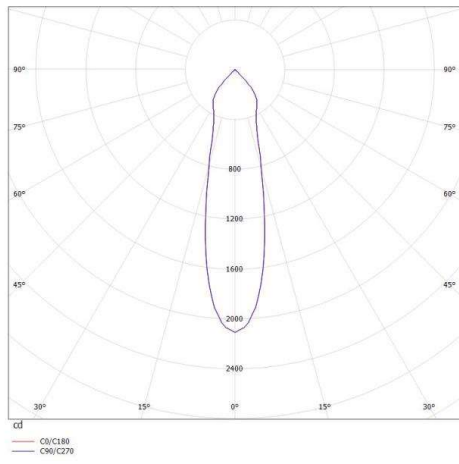

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K.  
The values apply to an ambient temperature of 25°C unless otherwise specified.