


Pendelleuchte | 198-264 V
72 topLED 25 W DC - 27 W AC | CRI 90
CA070DBBMDI

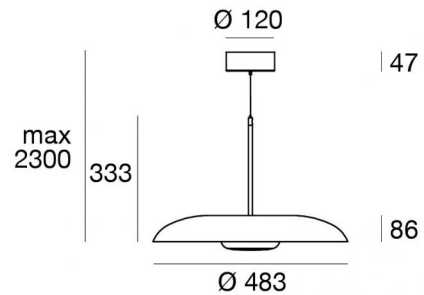

Technische Daten	
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	25 W DC
Gesamtleistung	27 W
Lichtstrom (Lichtquelle)	3248 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV

Oberfläche Gehäuse

Material	Aluminium
Farbe	Text Black Ral 9005
Bearbeitungstyp	Lackierung

Oberfläche diffusor

Material	PMMA
Farbe	Opal

Oberfläche fassung

Material	Eisen
Farbe	Text Black Ral 9005
Bearbeitungstyp	Lackierung

Cables Pendelleuchte

Max. Kabellänge	2000 mm
-----------------	---------

Pendelleuchte | 198-264 V | 72 topLED 25 W DC - 27 W AC | CRI 90
CA070DBBMDI

Single emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution topped LED with CCT of 2700 K and a CRI 90; the source luminous flux is 3248 lm, with a 129.9 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text black ral 9005 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text black ral 9005 finish, processed by means of coating. The ingress protection degree is IP40;

The total absorbed power is 27 W The power supply cable is included and features a 2 m length.

and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	64 %
Lichtstrom (Lichtquelle)	3248 lm
Leuchten Lichtstrom	2104 lm
Consumption	27 W
Leuchten Lichtausbeute	77 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50°C
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	
UGR	
UGR axial	23.5
UGR transversal	23.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Optik C0/C180	147°
Light distribution simmetry	Symmetrical

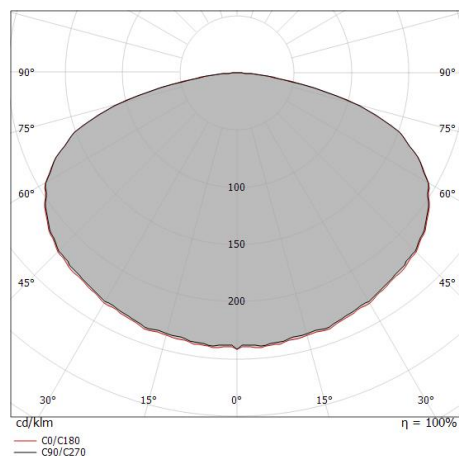

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	3.44 3.42	E(0°) 2033 E(C90) 22 E(C0) 23
1.0	6.88 6.84	E(0°) 508 E(C90) 6 E(C0) 6
1.5	10.33 10.26	E(0°) 226 E(C90) 2 E(C0) 3
2.0	13.77 13.68	E(0°) 127 E(C90) 1 E(C0) 1
2.5	17.21 17.10	E(0°) 81 E(C90) 1 E(C0) 1
3.0	20.65 20.52	E(0°) 56 E(C90) 1 E(C0) 1

— C0/C180 (Half-peak divergence: 147.4°)
— C90/C270 (Half-peak divergence: 147.6°)


Basin_P | Pendant Luminaires | Accessories
CA070DBBMDI



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code

KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit
Casambi
Radio-frequenza, 85-240V

Code

KIT0080