


FALLON | SURFACE DOWNLIGHT | WHITE/STEEL

nordlux®

47540132

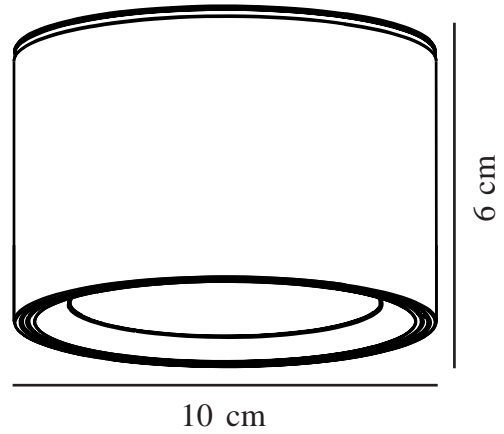

Voltage (V): 230 Volt
IP degree: IP20
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Socket type: LED – Non-replaceable light source
Parallel connection: True

Primary material: Metal
Secondary material: Plastic
Colour: White/steel
IK degree: IK03


Height (cm) : 6
EAN: 5701581415188
TUN: 1975407
Item Number: 47540132
Pcs Per Master Carton: 3
Sales Box Height (cm): 6.8








Sales Box Width(cm): 10.5
Sales Box Depth (cm): 10.5
Sales Box Volume m³ : 0.0007
Product net weight (kg): 0.275


Brightness of light (Lumen): 500
Colour temperature (Kelvin): 2700
Ra-value : 80
Lifetime (hours): 20000
Beam angle (°) : 110
Candela (cd) (for directional lamp only): 0
Energy class: F
Actual watt (W): 5.5

- 3-step Moodmaker™ dimming by your regular wall switch • Parallel connection possible
- External connector block included • Long LED lifespan (20,000 hours)


LED mounted ceiling spot with integrated LEDs and 3-step Moodmaker™ function. Change between 3 different light scenes with a conventional switch.


Nordlux
47540132

A 
B 
C 
D 
E 
F 
G 

F 

6
kWh/1000h


2019/2015