


G9 LED

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT 

LENS

- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 110° light distribution and for improving light efficiency.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.

DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.


HEATSINK


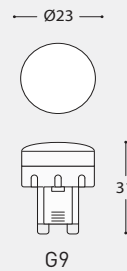
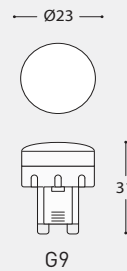
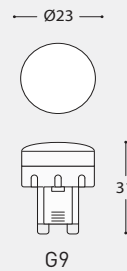






- Made by thermo-conductive ceramic material.
- Special design to grant a correct heat dissipation

G9 LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- ENEC certified.

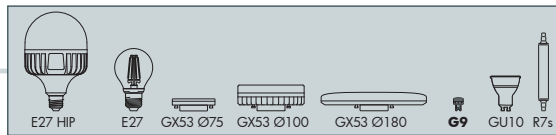



G9 LED																																					
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">POWER</td> <td style="text-align: right;">1,7 W</td> </tr> <tr> <td>LUMINOUS FLUX</td> <td style="text-align: right;">170 lm</td> </tr> <tr> <td>SIZE & SOCKET</td> <td style="text-align: center;">  </td> </tr> </table>	POWER	1,7 W	LUMINOUS FLUX	170 lm	SIZE & SOCKET																															
	POWER	1,7 W																																			
	LUMINOUS FLUX	170 lm																																			
SIZE & SOCKET																																					
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%; text-align: center;">  </td> <td style="width: 50%;"></td> </tr> </table>																																					
																																					
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT </p> </div> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  CE CB </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">LVD</div> <div style="border: 1px solid black; padding: 2px;">EMC</div> <div style="border: 1px solid black; padding: 2px;">ERP 6000h</div> </div> <div style="text-align: center;">  <small>IECEE CB CERTIFICATE: SG PSB-LE-02130</small> </div> </div>	<table border="1" style="width: 100%;"> <tr> <td>EFFICIENCY</td> <td colspan="2" style="text-align: right;">100 lm/W</td> </tr> <tr> <td>VOLTAGE</td> <td colspan="2" style="text-align: right;">100-240 V</td> </tr> <tr> <td>FREQUENCY</td> <td colspan="2" style="text-align: right;">50/60 Hz</td> </tr> <tr> <td>CURRENT</td> <td colspan="2" style="text-align: right;">17 mA</td> </tr> <tr> <td>COLOR RENDERING INDEX RA</td> <td colspan="2" style="text-align: right;">80</td> </tr> <tr> <td>SDCM</td> <td colspan="2" style="text-align: right;">< 6</td> </tr> <tr> <td>BEAM ANGLE</td> <td colspan="2" style="text-align: right;">110°</td> </tr> <tr> <td>WARM UP TIME</td> <td colspan="2" style="text-align: right;">≤ 0,5"</td> </tr> <tr> <td>SWITCHING CYCLE</td> <td colspan="2" style="text-align: right;">> 40.000</td> </tr> <tr> <td>LIFETIME</td> <td colspan="2" style="text-align: right;">15.000 h</td> </tr> <tr> <td>KELVIN</td> <td style="text-align: right;">4000 K</td> <td style="text-align: right;">3000 K</td> </tr> <tr> <td>REF. CODE</td> <td style="text-align: right;">H.LED.G09.4K</td> <td style="text-align: right;">H.LED.G09.3K</td> </tr> </table>	EFFICIENCY	100 lm/W		VOLTAGE	100-240 V		FREQUENCY	50/60 Hz		CURRENT	17 mA		COLOR RENDERING INDEX RA	80		SDCM	< 6		BEAM ANGLE	110°		WARM UP TIME	≤ 0,5"		SWITCHING CYCLE	> 40.000		LIFETIME	15.000 h		KELVIN	4000 K	3000 K	REF. CODE	H.LED.G09.4K	H.LED.G09.3K
EFFICIENCY	100 lm/W																																				
VOLTAGE	100-240 V																																				
FREQUENCY	50/60 Hz																																				
CURRENT	17 mA																																				
COLOR RENDERING INDEX RA	80																																				
SDCM	< 6																																				
BEAM ANGLE	110°																																				
WARM UP TIME	≤ 0,5"																																				
SWITCHING CYCLE	> 40.000																																				
LIFETIME	15.000 h																																				
KELVIN	4000 K	3000 K																																			
REF. CODE	H.LED.G09.4K	H.LED.G09.3K																																			