



Paulmann

Safety Instructions

1, 2, 3, 4, 5, 6, 10, 12, 14, 15, 16, 17,
18, 19, 20, 21, 33, 34



Info

www.paulmann.com

Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe
Germany


www.paulmann.com

Art.-Nr.: 943.84
943.85
943.86

(+MA 326) PDU 05/20



943.84




1x



1x

943.85




1x



1x

943.86




1x



1x




A

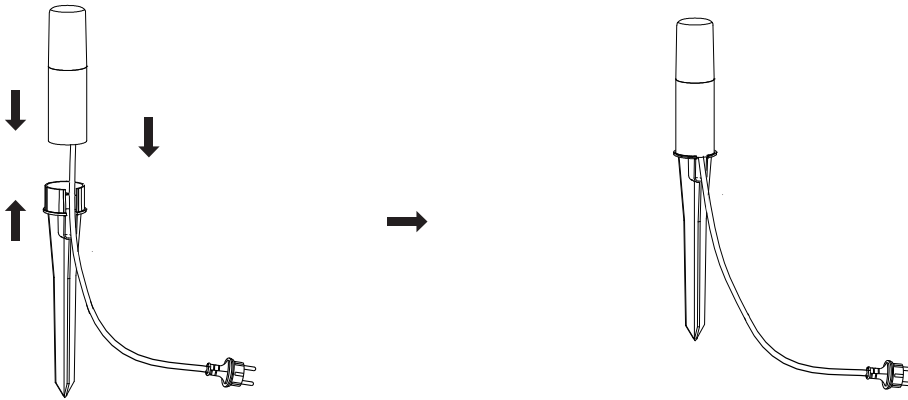

B

i IP65


! on

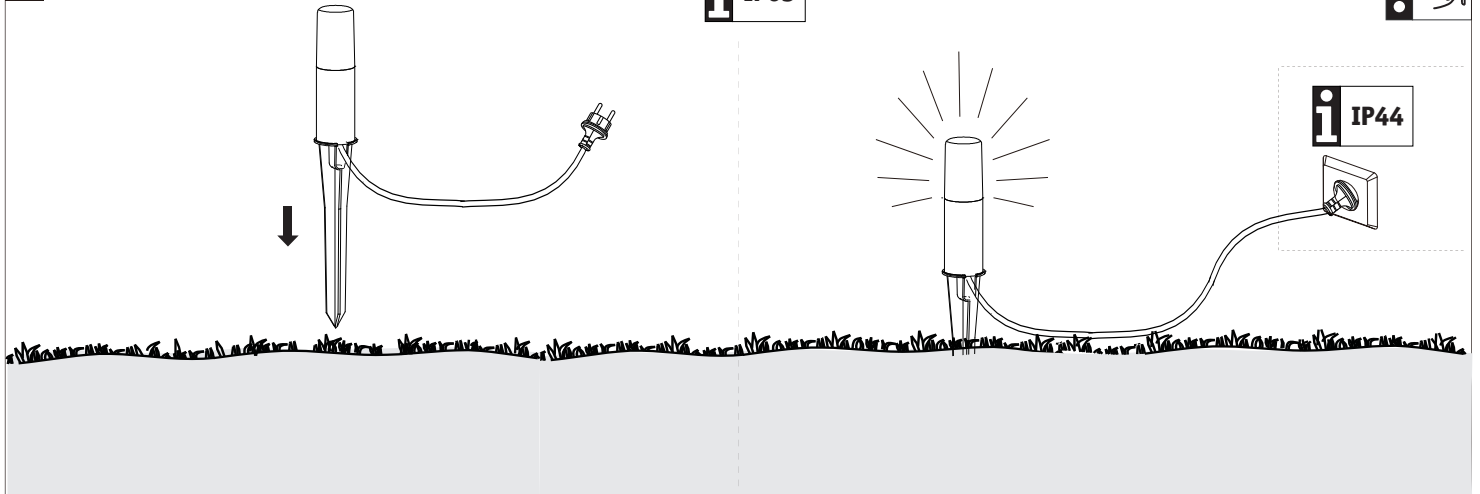

C

i IP44

i IP65

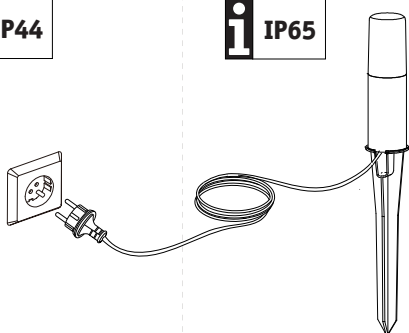

! The min bending diameter of rubber cable is 60 mm

