

Mini Series

Constant Voltage LED Driver


LED恒压驱动器

Features:

- Super compact design
- Driver for built-in use
- Universal AC input
- Input and output terminal blocks on the same side
- Protections: open circuit, short circuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II



- 紧凑型设计
- 内置式驱动运用
- 全电压输入规格AC100-240V
- 同侧输入和输出端接线端子
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II

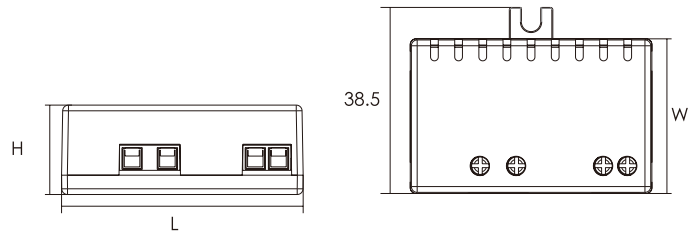

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 t _a (°C)	Max. casing temperature 最大外壳温度 t _c (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
MINI12V/6W	100-240	6	12	0-0.5	0.40C	79	<0.3	-20...+50	80	SELV	50x38.5x18.5	30
MINI24V/6W	100-240	6	24	0-0.25	0.40C	81	<0.3	-20...+50	80	SELV	50x38.5x18.5	30


CB CE