


## Luminaire

Code 0644020A  
Name LOGICO MICRO PLAFONE


## Measurment.

Code FTS1601218  
Name LOGICO MICRO PLAFONE

Luminaire Flux	563.87 lm	Luminaire Power	42.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	630.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	180 mm 180 mm	Height Height	170 mm 170 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.025447 m2 0.030600 m2 0.030600 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.030600 m2 0.030600 m2 0.035847 m2	
Coordinate system Date Measurement Distance		CG 07-03-2004 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Asymmetrical 180 630.00 lm	
HS 42W E14 230V							
C.I.E. F UTE	34 56 77 55 90 0.49 H + 0.40 T			D DIN 5040 B NBN		C21 BZ 6 / 1.25 / BZ 7	



ULOR 40.03 %  
DLOR 49.48 %  
RN 44.72 %

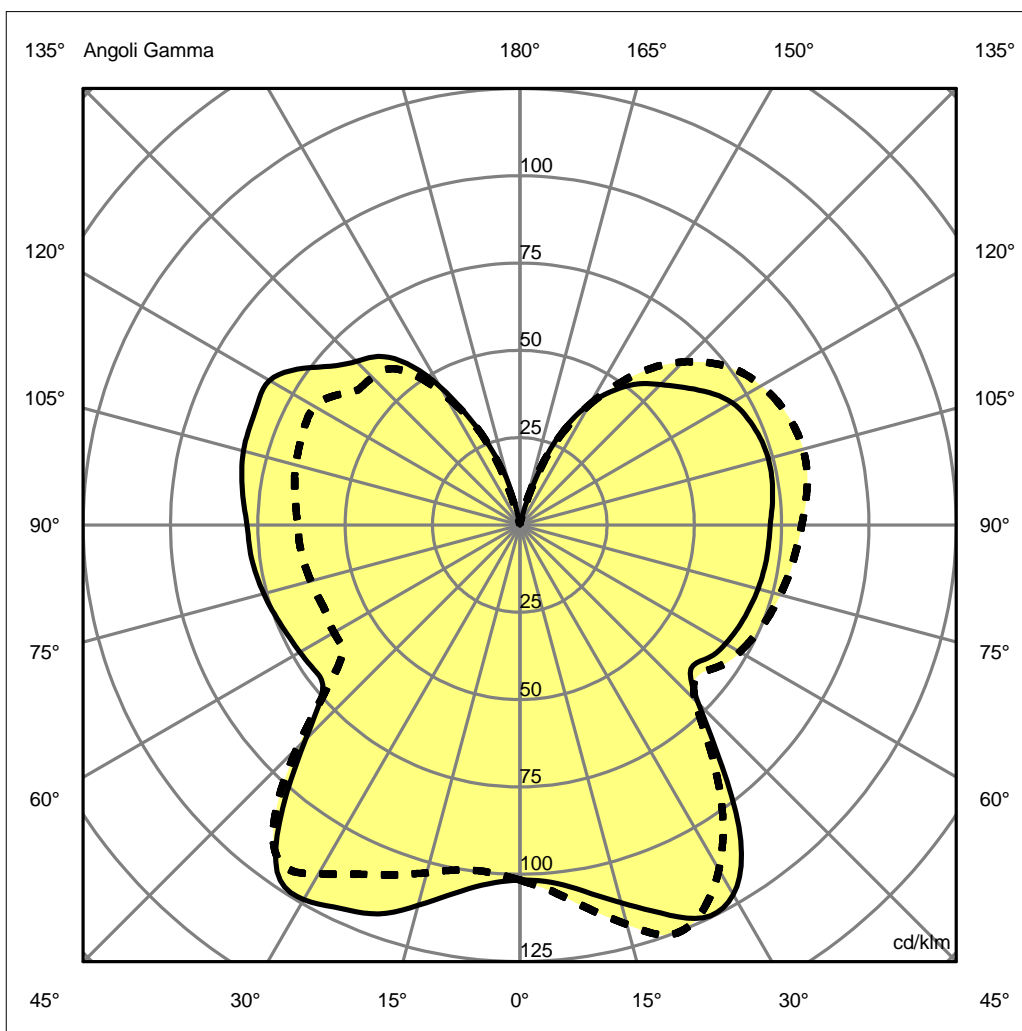

**Luminaire**

Code 0644020A  
Name LOGICO MICRO PLAFONE

**Measurem.**

Code FTS1601218  
Name LOGICO MICRO PLAFONE

Luminaire Flux	563.87 lm	Luminaire Power	42.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	630.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	180 mm	Height	170 mm		
Round Luminous Area		Diam.	180 mm	Height	170 mm		
Horizontal Luminous Area		0.025447 m2		Emitting area on Plane 180°		0.030600 m2	
Emitting area on Plane 0°		0.030600 m2		Emitting area on Plane 270°		0.030600 m2	
Emitting area on Plane 90°		0.030600 m2		Glare area at 76°		0.035847 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		07-03-2004		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		630.00 lm	
HS 42W E14 230V							
C.I.E.	34 56 77 55 90			D DIN 5040	C21		
F UTE	0.49 H + 0.40 T			B NBN	BZ 6 / 1.25 / BZ 7		

Apertura a destra non trovata, gamma =27

Apertura a destra non trovata, gamma =27

Apertura a destra non trovata, gamma =27

**Luminaire**

Code 0644020A  
Name LOGICO MICRO PLAFONE

**Measurement**

Code FTS1601218  
Name LOGICO MICRO PLAFONE

Luminaire Flux	563.87 lm	Luminaire Power	42.00 W	Efficacy	13.43 lm/W	Efficiency	89.50%
Lamps Flux	630.00 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	9.2	10.2	10.1	11.0	11.6	8.7	9.6	9.5	10.5	11.6
x=2H y=3H	11.9	12.8	12.8	13.6	13.9	11.1	11.9	11.9	12.8	13.9
x=2H y=4H	13.3	14.2	14.2	15.0	15.2	12.4	13.2	13.3	14.1	15.2
x=2H y=6H	14.8	15.6	15.7	16.5	16.6	13.8	14.5	14.7	15.4	16.6
x=2H y=8H	15.6	16.3	16.5	17.2	17.3	14.4	15.2	15.3	16.1	17.3
x=2H y=12H	16.3	17.0	17.2	17.9	17.9	15.1	15.8	16.0	16.7	17.9
x=4H y=2H	10.1	10.9	10.9	11.8	12.3	9.5	10.3	10.4	11.2	12.3
x=4H y=3H	12.9	13.6	13.8	14.5	14.9	12.1	12.8	13.0	13.7	14.9
x=4H y=4H	14.4	15.1	15.4	16.0	16.4	13.6	14.2	14.5	15.1	16.4
x=4H y=6H	16.1	16.6	17.0	17.6	17.8	15.1	15.7	16.1	16.6	17.8
x=4H y=8H	16.9	17.4	17.8	18.4	18.6	15.9	16.4	16.8	17.4	18.6
x=4H y=12H	17.7	18.2	18.7	19.2	19.3	16.6	17.1	17.6	18.1	19.3
x=8H y=4H	15.0	15.5	16.0	16.5	16.9	14.2	14.7	15.2	15.7	16.9
x=8H y=6H	16.8	17.3	17.8	18.3	18.6	15.9	16.4	16.9	17.4	18.6
x=8H y=8H	17.8	18.2	18.8	19.2	19.5	16.9	17.3	17.8	18.2	19.5
x=8H y=12H	18.8	19.1	19.8	20.1	20.4	17.8	18.1	18.8	19.1	20.4
x=12H y=4H	15.1	15.6	16.1	16.6	17.0	14.3	14.8	15.3	15.8	17.0
x=12H y=6H	17.1	17.4	18.0	18.4	18.8	16.2	16.6	17.2	17.6	18.8
x=12H y=8H	18.1	18.4	19.1	19.4	19.8	17.2	17.5	18.2	18.5	19.8