

Luminaire

Code 1283010A
Name NH 35 S

Measurem.

Code FTS2000225
Name NH 35 S

Luminaire Flux	2198.60 lm	Luminaire Power	21.00 W	Efficacy	104.70 lm/W	Efficiency	89.67%
Lamps Flux	2452.00 lm	Maximum value	84.51 cd/klm	Position	C=0.00 G=50.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	350 mm 350 mm	Height Height	350 mm 350 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.096211 m2 0.122500 m2 0.122500 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.122500 m2 0.122500 m2 0.142137 m2	
Coordinate system Date Measurement Distance		CG 04-03-2020 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2452.00 lm	
Greenplux 4W E27 3000K 21 W 2452 lm							
C.I.E. F UTE	25 51 76 58 90 0.52 J + 0.38 T			D DIN 5040 B NBN	C11 BZ 8		

Diam=350mm




Semipiani C

180.0 ——— 0.0

ULOR 37.75 %

DLOR 51.91 %

RN 42.10 %

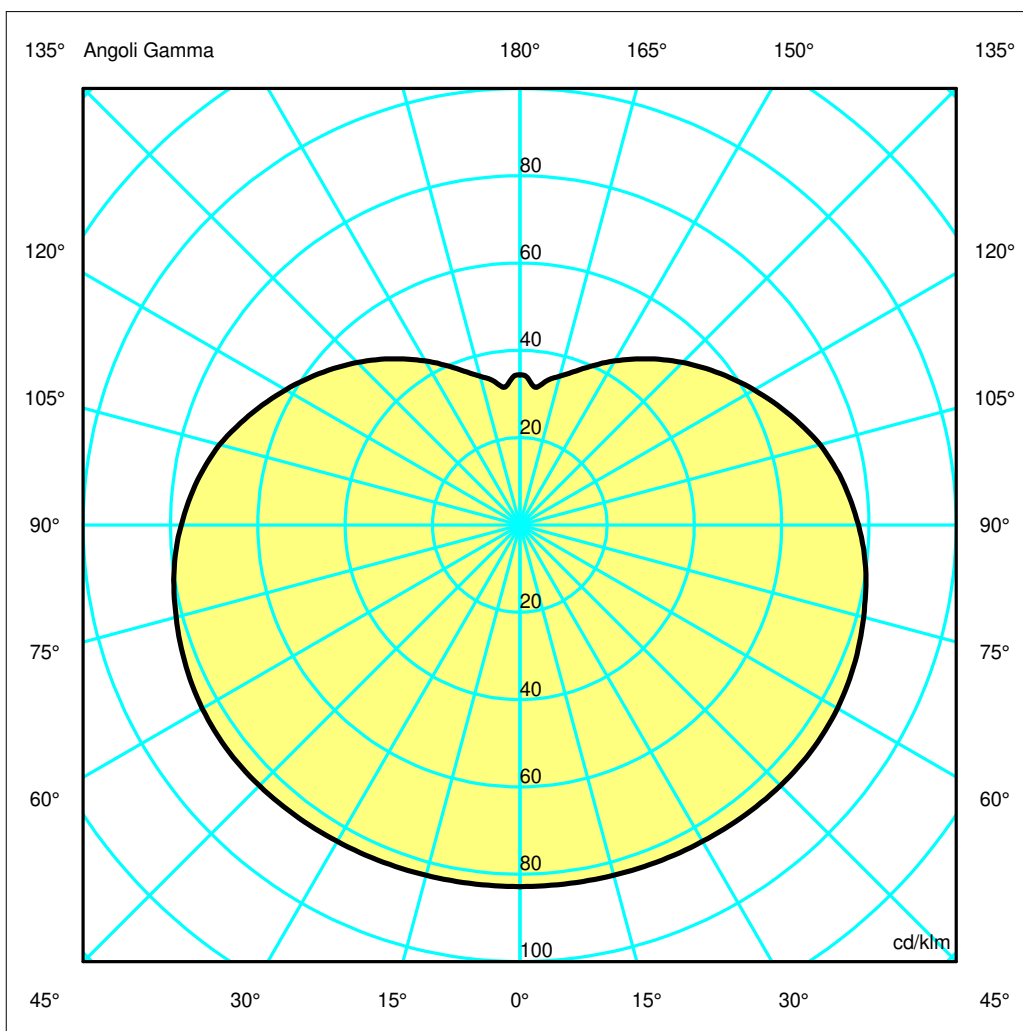

Luminaire

Code 1283010A

Name NH 35 S

Measur.

Code FTS2000225

Name NH 35 S

Luminaire Flux	2198.60 lm	Luminaire Power	21.00 W	Efficacy	104.70 lm/W	Efficiency	89.67%
Lamps Flux	2452.00 lm	Maximum value	84.51 cd/klm	Position	C=0.00 G=50.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	350 mm 350 mm	Height Height	350 mm 350 mm		
Horizontal Luminous Area		0.096211 m2		Emitting area on Plane 180°		0.122500 m2	
Emitting area on Plane 0°		0.122500 m2		Emitting area on Plane 270°		0.122500 m2	
Emitting area on Plane 90°		0.122500 m2		Glare area at 76°		0.142137 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2452.00 lm	
Greenplux 4W E27 3000K 21 W 2452 lm							
C.I.E.	25 51 76 58 90			D DIN 5040	C11		
F UTE	0.52 J + 0.38 T			B NBN	BZ 8		

Apertura a destra non trovata, gamma =50

Apertura a destra non trovata, gamma =50