


KALIO ROUND R**308-30003600**

KALIO ROUND R RECESSED SPOTLIGHT made of aluminium, black, similar to RAL 9005, beam 24°, light output direct, tilting 45°, max. 250mA, IP20

**DRAWING**

45°

1 - 20 mm

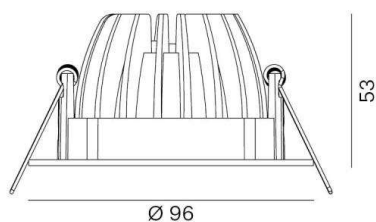
 Ø 86 mm, **ET 83 mm**
**LIGHT DISTRIBUTION CURVE****TECHNICAL DETAILS**

Bulb type	LED 8W
Luminous flux [lm]	860
Current sec. [mA]	250
Colour temp. [K]	2700K
CRI	>90
Light output	direct
Beam angle [°]	24°
Voltage [V]	36 VDC
Material	aluminium
Height [mm]	53
Diameter [mm]	96
Ceiling cutout [mm]	86
Recess depth [mm]	83
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,15
Color lamp	black

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K.
The values apply to an ambient temperature of 25°C unless otherwise specified.

Color lamp
RAL
EAN-Number
Lifetime [h]

black
9005
9010506139877
25 000

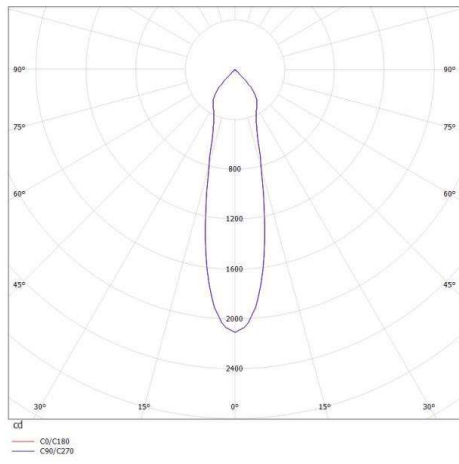

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K.
The values apply to an ambient temperature of 25°C unless otherwise specified.