

## SLC MINIONE FIXED R25 BL 927 IP65 45°

17/01/2022

### SLC1205IP

#### Product description

The SLC MiniOne Fixed in IP65 is a stylish mini-downlight with high lumen output and a narrow beam angle of 45° - designed for decorative lighting. Get the Final touch on your project with SLC MiniOne. Connect up to 6 downlights on one driver. Can be built-in or mounted on top with the MiniOne Tube accessory. Cut out hole: 25 mm / Built-in height: 18 mm. IP65 (Front) / IP21 (Back)



#### Technical data

Suitable for built-in mounting	Yes
Adjustability	Not adjustable
With light source	Yes
Surface protection	Powder coating
Material cover	Other
Nominal voltage	3 - 6 V
Type of control gear	LED operating device current-controlled
Light distributor	Other
Beam angle	Wide beam 41-80°
Rated life time L90/B10 at 25 °C	50000 h
Protection class	II
Colour of light	White
Colour rendering index CRI	90-100

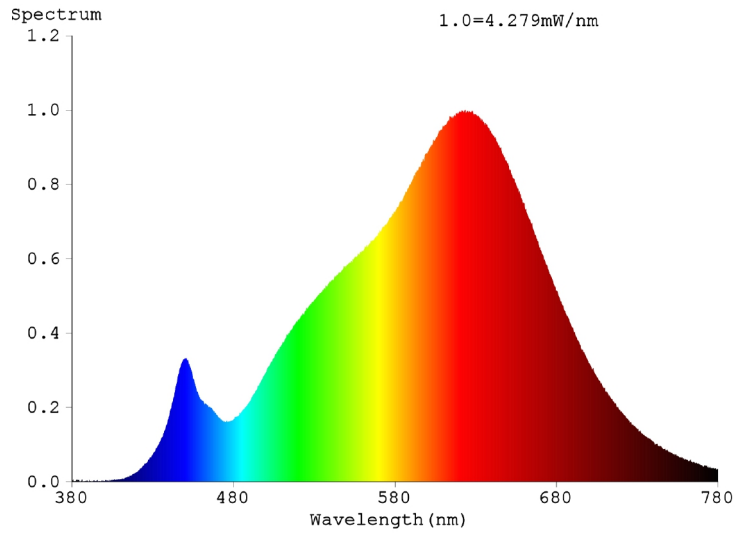
Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	Black
Voltage type	DC
LED nominal current at constant current	700 - 700 mA
Dimming phase cut-off	Yes
Light sharing	Symmetric
Light outlet	Direct
Degree of protection (IP)	IP65
Rated ambient temperature according to IEC	-10 - °C
Colour temperature	2700 - 2700 K
Rated luminous flux according to IEC 62722-	168 lm







Lamp efficacy	54 lm/W
Height/depth	18 mm
Built-in width	25 mm
Number of poles	2
Luminaire efficacy	53 lm/W
Can be installed directly into the insulation	Yes
Dimming method	Trailing edge
Brand	SLC

Width	32 mm
Length	32 mm
Type of wiring	Suitable for through wiring
Connection type	Pinching contact
Beam angle (°)	45
Cut-out hole (Ø: mm)	25
Dimmable	Yes
Produced by	The Light Group








 **ENERG** 


Scandinavian Lighting Concept  
SLC1205IP


---


A 



B 

C 

D 


E 

F 

G  

---

**3**  
kWh/1000h

 2019/2015

