

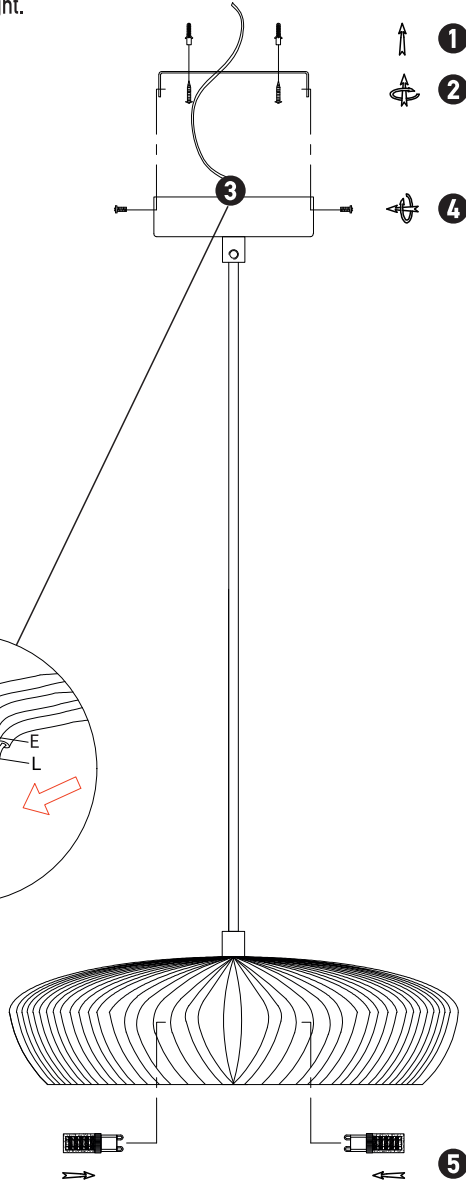


**Connecting the Terminal Block**

Connect main supply (**brown - Live, blue - Neutral**) into terminal block making sure all connections are tight.

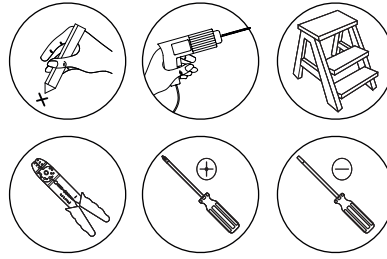

Please read instructions before commencing installation and retain for future reference.

**SPECIFICATIONS**

- **Lamp Type:** 2x G9 LED | 9W MAX
- **Material:** Clay | Metal
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

**INSTALLATION INSTRUCTIONS**

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main supply is switched off.
- Install the mounting anchors on the ceiling (1).
- Fix the mounting bracket using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, and connect the power cord (3). Making sure all connections are tight.
- Fix the ceiling plate to the mounting bracket using the screws (4).
- Add the G9 LED type light bulbs (5).
- Reconnect power.

**WARNING**

- ⚠ Make sure that the products are installed properly before connecting to electricity.
- Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

