

Luminaire

Code 2004010APP
 Name DISCOVERY SPACE 90X90 S W app compat

Measurem.

Code FTS2000305
 Name DISCOVERY SPACE 90X90 S W app compat

Luminaire Flux	1955.25 lm	Luminaire Power	34.00 W	Efficacy	57.51 lm/W	Efficiency	100.00%
Sources Flux	1955.25 lm	Maximum value	155.21 cd/klm	Position	C=90.00 G=90.00	CG	Asymmetrical
Rectangular Luminaire		Length	17 mm	Width	900 mm	Height	900 mm
Rectangular Luminous Area		Length	1 mm	Width	866 mm	Height	865 mm
Horizontal Luminous Area		0.000866 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.749956 m2		
Emitting area on Plane 90°		0.749956 m2		Glare area at 76°	0.000210 m2		
Coordinate system		CG		Symmetry Type	Asymmetrical		
Date		19-02-2020		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	1955.25 lm		


LED Flux=4716lm LED Power=30W Eff=41% EfcLed=157lm/W EfcLum=58lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h

C.I.E. 20 45 72 50 100
 F UTE 0.50 J + 0.50 T

D DIN 5040
 B NBN

C11
 BZ 9

17mm x 900mm




Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 50.00 %

DLOR 50.00 %

RN 50.00 %

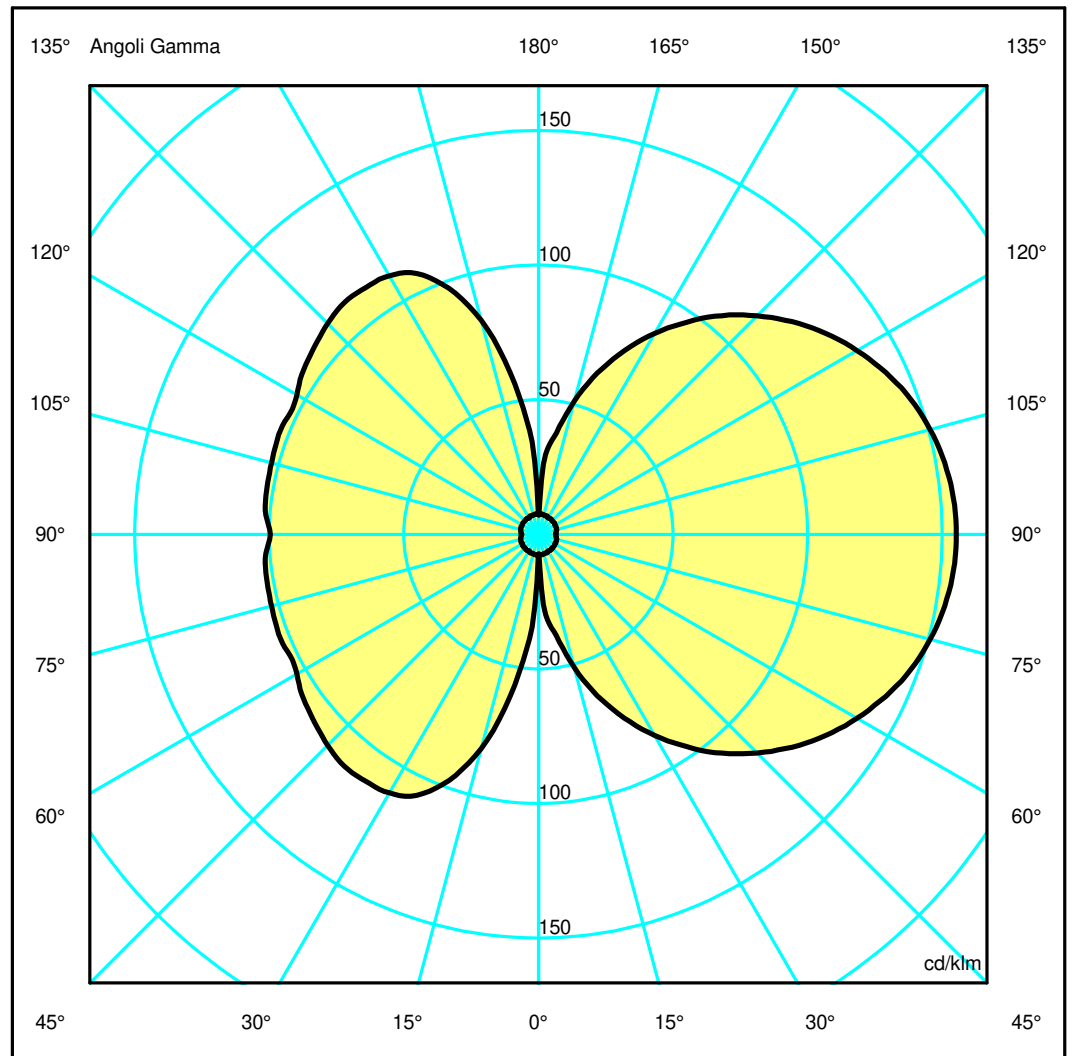

Luminaire

Code 2004010APP
 Name DISCOVERY SPACE 90X90 S W app compat

Measur.

Code FTS2000305
 Name DISCOVERY SPACE 90X90 S W app compat

Luminaire Flux	1955.25 lm	Luminaire Power	34.00 W	Efficacy	57.51 lm/W	Efficiency	100.00%
Sources Flux	1955.25 lm	Maximum value	155.21 cd/klm	Position	C=90.00 G=90.00	CG	Asymmetrical
Rectangular Luminaire		Length	17 mm	Width	900 mm	Height	900 mm
Rectangular Luminous Area		Length	1 mm	Width	866 mm	Height	865 mm
Horizontal Luminous Area		0.000866 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.749956 m2	
Emitting area on Plane 90°		0.749956 m2		Glare area at 76°		0.000210 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-02-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1955.25 lm	
LED Flux=4716lm LED Power=30W Eff=41% EfcLed=157lm/W EfcLum=58lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000 h							
C.I.E.	20 45 72 50 100			D DIN 5040	C11		
F UTE	0.50 J + 0.50 T			B NBN	BZ 9		

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0

Apertura a destra non trovata, gamma =0