


Luminaire

Code 1409220A
Name GOPLE MINI T BCO+BIANCO SFUMATO

Measurem.

Code FTS2000853
Name GOPLE MINI T BCO+BIANCO SFUMATO

Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=200.00 G=161.00	CG	Asymmetrical
Round Luminaire Round Luminous Area	Diam. 150 mm Diam. 150 mm	Height	296 mm	Height	296 mm		
Horizontal Luminous Area	0.017671 m2	Emitting area on Plane 180°	0.044400 m2	Emitting area on Plane 270°	0.044400 m2	Emitting area on Plane 90°	0.047356 m2
Coordinate system	CG	Symmetry Type	Asymmetrical				
Date	22-01-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	470.00 lm				
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	14 37 66 35 94	D DIN 5040	D12				
F UTE	--	B NBN	BZ 10				

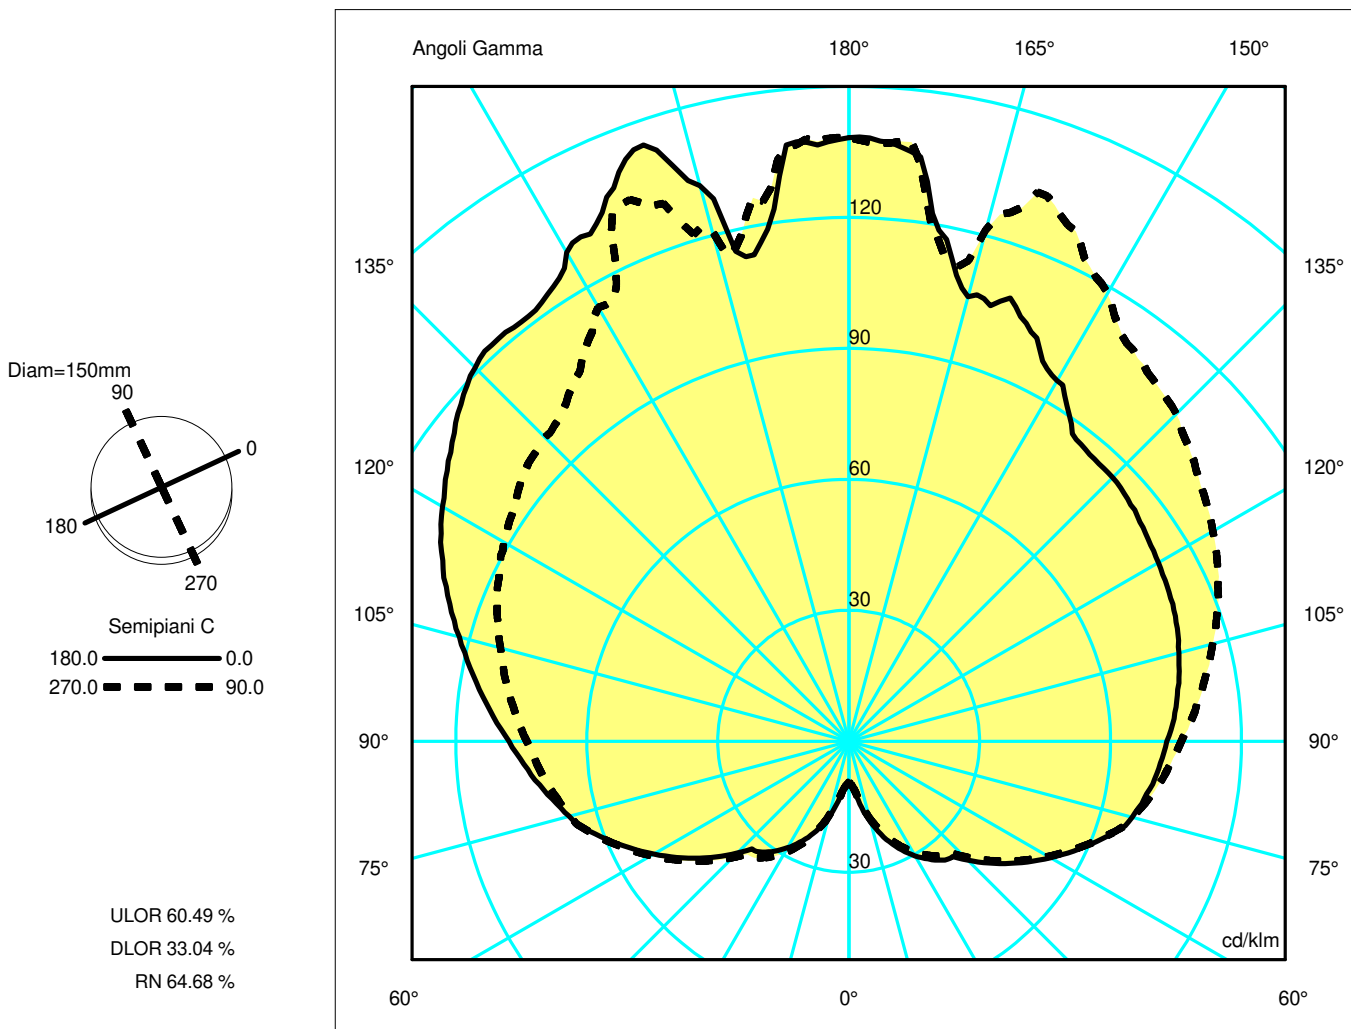

Luminaire

Code 1409220A
 Name GOPLE MINI T BCO+BIANCO SFUMATO

Measur.

Code FTS2000853
 Name GOPLE MINI T BCO+BIANCO SFUMATO

Luminaire Flux	439.57 lm	Luminaire Power	5.70 W	Efficacy	77.12 lm/W	Efficiency	93.53%
Lamps Flux	470.00 lm	Maximum value	146.04 cd/klm	Position	C=200.00 G=161.00	CG	Asymmetrical
Round Luminaire		Diam.	150 mm	Height	296 mm		
Round Luminous Area		Diam.	150 mm	Height	296 mm		
Horizontal Luminous Area		0.017671 m2		Emitting area on Plane 180°		0.044400 m2	
Emitting area on Plane 0°		0.044400 m2		Emitting area on Plane 270°		0.044400 m2	
Emitting area on Plane 90°		0.044400 m2		Glare area at 76°		0.047356 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		22-01-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		470.00 lm	
OSRAM Parathom P CLAS P 40 5.7 W/827 E14							
C.I.E.	14 37 66 35 94			D DIN 5040	D12		
F UTE	--			B NBN	BZ 10		

Apertura a destra non trovata, gamma =-19

Apertura a destra non trovata, gamma =-19

Apertura a destra non trovata, gamma =-19