

RUT - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

RUT

E26.000 *



Dimensions and weight

Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27	
	6 W	800 Lm	4000 K	.F1L	
			2700 K	.F1R	
	8 W	1000 Lm	4000 K	.M1L	
			2700 K	.M1R	
	12 W	1500 Lm	4000 K	.N1L	
			2700 K	.N1R	

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W 8W 12W = 60W 75W 100W incandescent


SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

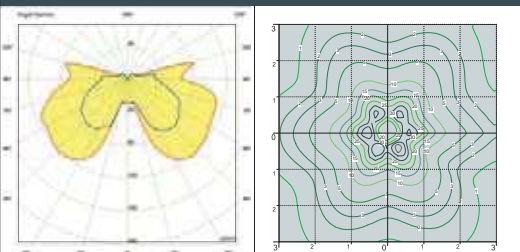

RUT lantern clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE