
GIÙUP GIÙUP ST-DIM





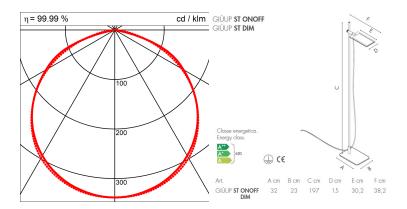

## Luminaires

| Hersteller                      | ICONE                  |
|---------------------------------|------------------------|
| Article number                  | GIÙUP ST-DIM           |
| Product name                    | GIÙUP                  |
| Product group                   | freestanding uplighter |
| Mounting type                   | Surface mounted        |
| Mounting place                  | Floor                  |
| Designer                        | Marco Pagnoncelli      |
| Test mark                       | CE                     |
| Model / Variant / Configuration |                        |
| Number / Name                   | BI                     |
| Description<br>white            |                        |
| Luminaires                      |                        |
| Absolute Photometry             |                        |
| System Light flux               | 3799.62 Lm             |
| Luminaire output                | 95.00 Lm/W             |
| LiTG class                      | A40                    |
| CIE flux codes                  | 47 80 97 100 100       |
| System power                    | 40.0W                  |
| Protection class                | Protection class I     |
| Protection degree               | IP 20                  |
|                                 |                        |

| Dimensions          |                    |
|---------------------|--------------------|
| Length/Width/Height | 382mm/150mm/1970mm |
| Light Source        |                    |
| Lamp type           | 1 x LED            |
| ZVEI / ILCOS        | LED / LED          |
| Lamp power          | 40 W               |
| System power        | 40 W               |
| Light flux          | 3800 lm            |
| Colour temperature  | 3000K              |
| Colour rendering    | 1B                 |
| Lifetime            | 50000 h            |
|                     |                    |

## Description

A collection with a classical design made of turned aluminium.

The body of the fitting is adjustable for a confortable indirect lighting. The 220V LED, highly performing and efficient, don't need any driver. Energy class A++, A+, A - Registered design