



SLC DL04 SURFACE X2 BL 1557TED 930 IP21 36°

14/01/2022

SLC1231



Product description

The DL04 Surface X2 is an angular, tiltable surface-mounted luminaire with a contemporary design. Experience pleasant light with low glare and plenty of lumen.

- Delivery complete with driver
- Deep LED for a pleasant light UGR <22
- Angular swivel surface-mounted luminaire in contemporary design
- Quick coupling with loop-in / loop-out
- CRI >90 enhances vivid colors in any environment
- Delivers plenty of light
- 16mm cable tube



Technical data

Suitable for surface mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Material cover	Plastic, transparent
LED nominal current at constant current	400 - 400 mA
Control gear included	Yes
Reflector	High-gloss
Light sharing	Symmetric
Light outlet	Direct


Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Colour housing	Black
Voltage type	AC/DC
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light distributor	Reflector
Beam angle	Medium beam 21-40°
Rated life time L90/B10 at 25 °C	100000 h






Degree of protection (IP)	IP21
Rated ambient temperature according to IEC	-20 - 45 °C
Colour of light	White
Colour rendering index CRI	90-100
Lamp efficacy	102 lm/W
Height/depth	60 mm
Type of wiring	Suitable for through wiring
Conductor cross section	0,35 mm ²
Connection type	Plug clamp
Colour rendering index (CRI/Ra)	90
Tilt-able (°)	25
Dimming method	Trailing edge
Dimming range	1-100%
GTIN	7070938065498

Protection class	I
Max. system power	16 W
Colour temperature	3000 - 3000 K
Rated luminous flux according to IEC 62722-	1557 lm
Width	135 mm
Length	224 mm
Number of poles	2
Connectable conductor cross section	1,5 - 2,5 mm ²
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Glare (UGR)	UGR<22
Dimmable	Yes
Brand	SLC
Produced by	The Light Group

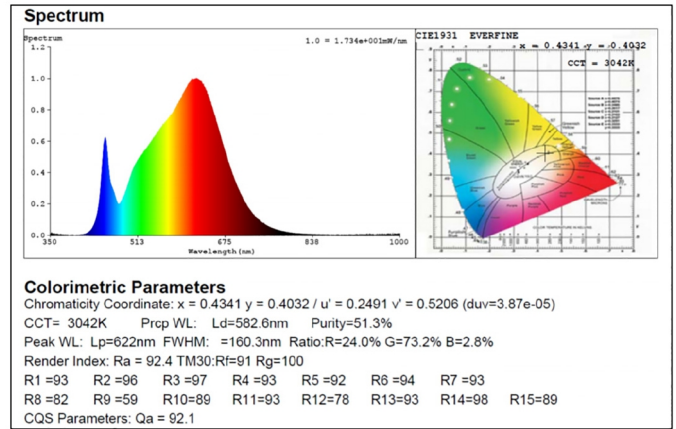



 **ENERG** 

Scandinavian Lighting Concept
SLC1231

A 


B 

C 

D 

E   **E**

F 

G 

15
kWh/1000h

 2019/2015

