

LUCERNA SOLAR HYBRID 50

LOOM
DESIGN



LAMPFEBER®
SCANDINAVIA




Product Description


Solar hybrid charging lantern. It is composed of the latest generation technology components of lithium batteries, electronics and solar panel. Remove all the non-essential elements from the vintage lantern to leave a simple and clean architectural structure. The purpose is filled up with the space that surrounds it without making a mark and without changing the visual continuity of the space in the day. Its transparency and lightweight structure create intimate, suffused atmospheres which leave the fascination of the night unchanged. The structure is made of die-casting aluminium and extrusion aluminium profile with a matt black, matt white, dark grey and corten finish. Its materials, all recyclable, have been carefully selected. Adjustments are also easy. 1 twilight sensor panel and 1 manual control button located next to the solar panel.

Technical Information

Light source: SMD LED Module
Colour temperature: 2700K & 3000K (switchable)
Colour rendering index: CRI > 80
Luminaire connected wattage: 2.2 W
Voltage: DC3.7V
Luminaire luminous flux: 150 lm
Light optics: 360°
Light distribution: Wide
Battery type: 18650 Li-ion battery
Battery capacity: 2200mAh×2
Solar charging time: <20hrs
USB charging time: <6hrs
Battery life: >20hrs (50% light intensity)
Battery life: >9hrs (100% light intensity)
Adapter(optional): CLASS II; Input AC100-240V; Output DC5V 1A;
USB Type C cable incl-: 1.5m USB cable
Manual switch: Button ON/OFF
Sensor switch: Button ON/OFF
Dimmer switch: Button stepless dimmable 5%-100%
Memory function: Memory of brightness & colour temperature
Wall mount bracket: Optional
Protection class: IP65
Impact strength: IK 06
Safety: Class III
Weight: 1.69kg




360° light distribution

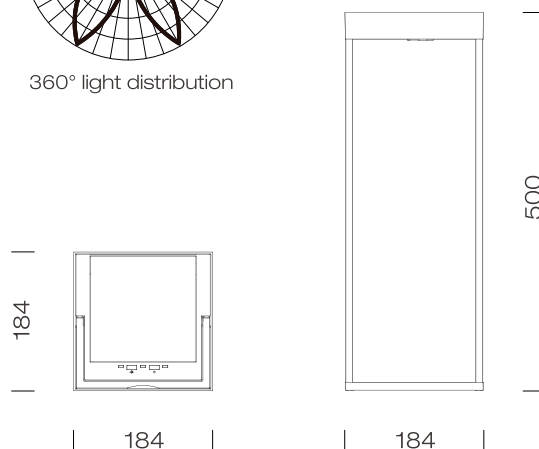

Finish Available


Matt White Matt Black Corten


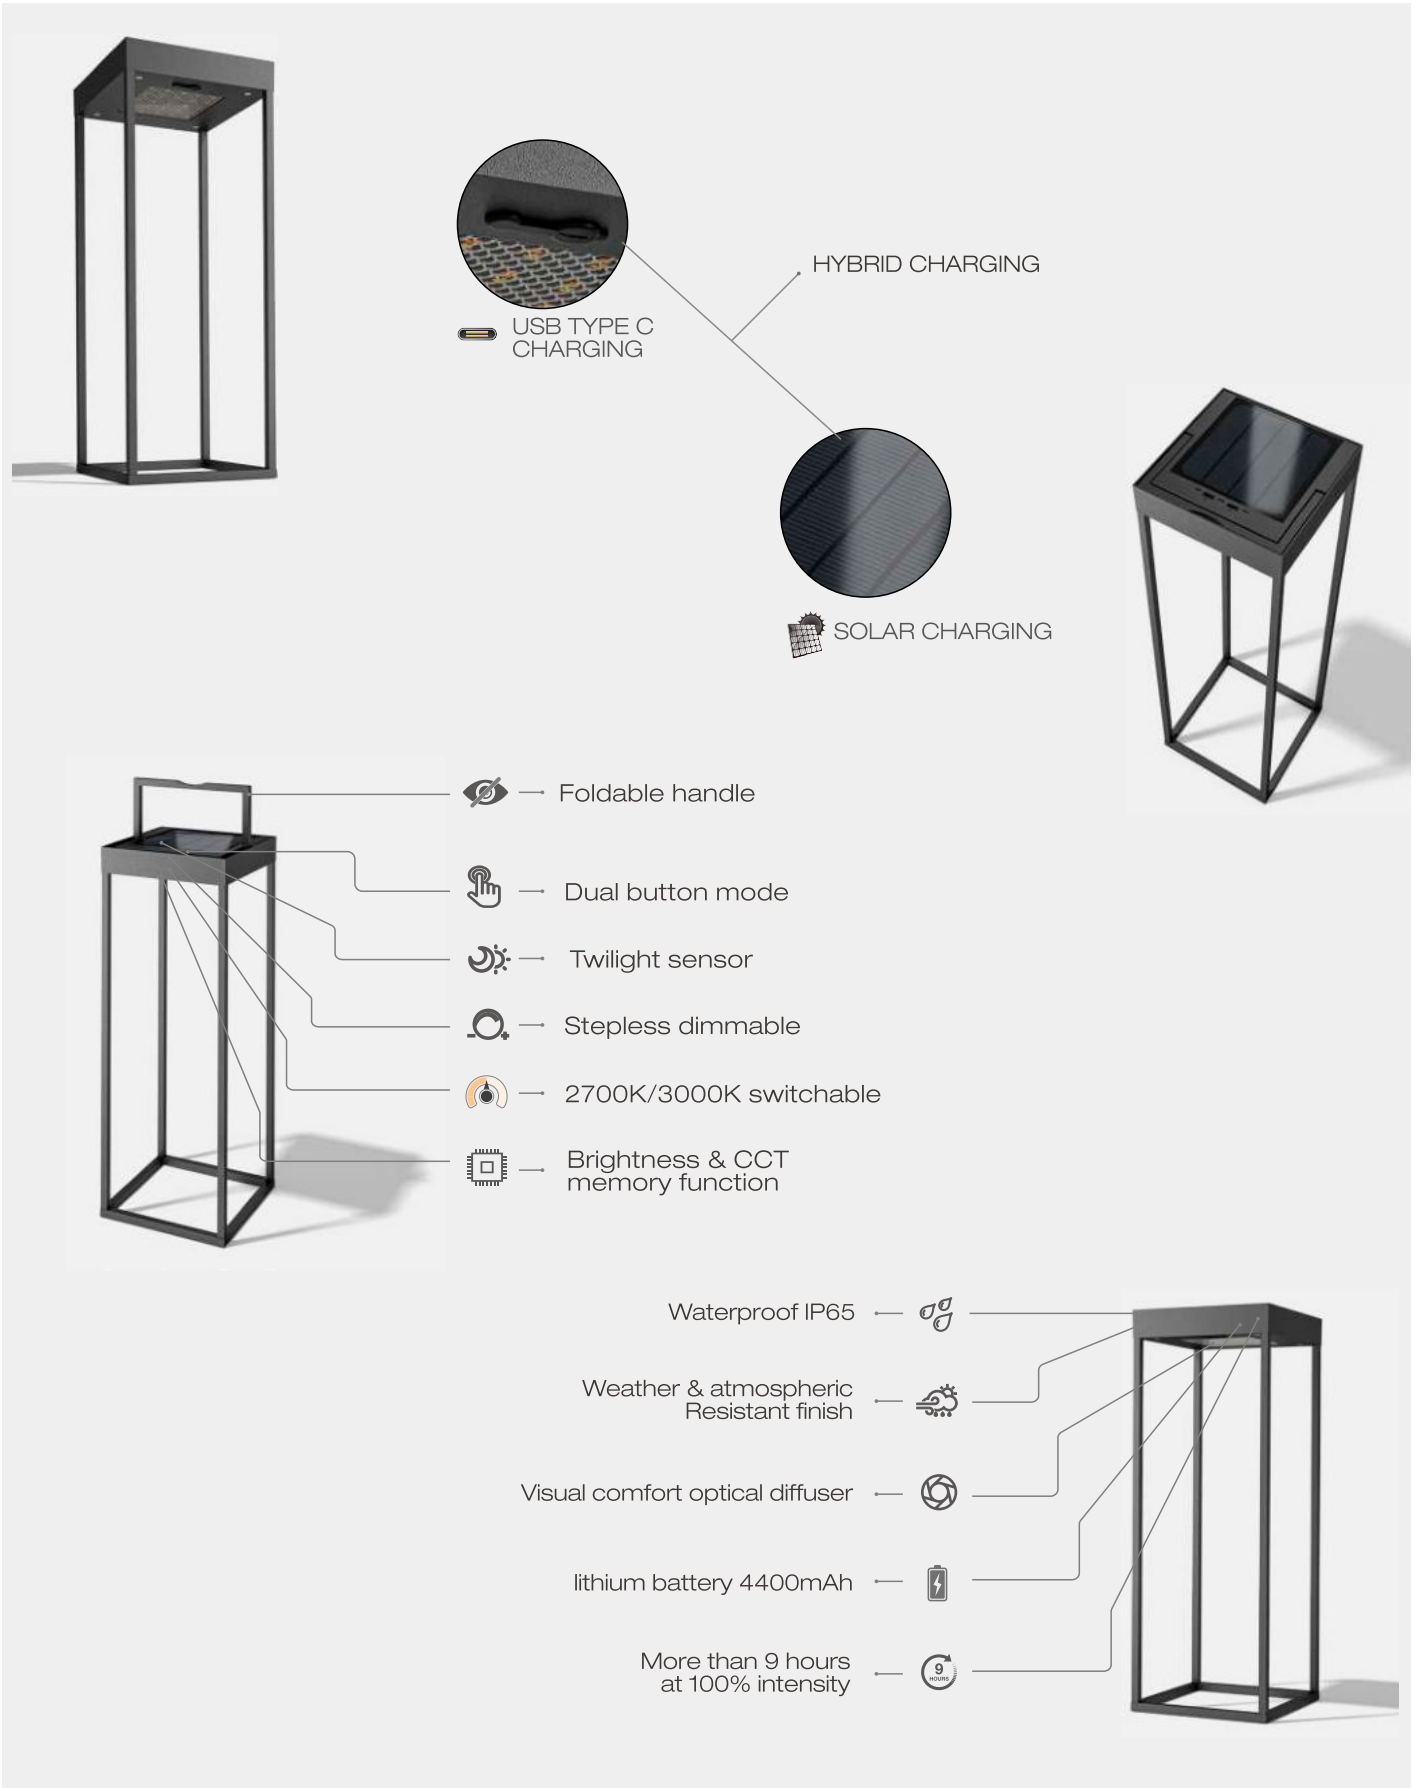





WALL-MOUNTED
BRACKET (OPTIONAL)



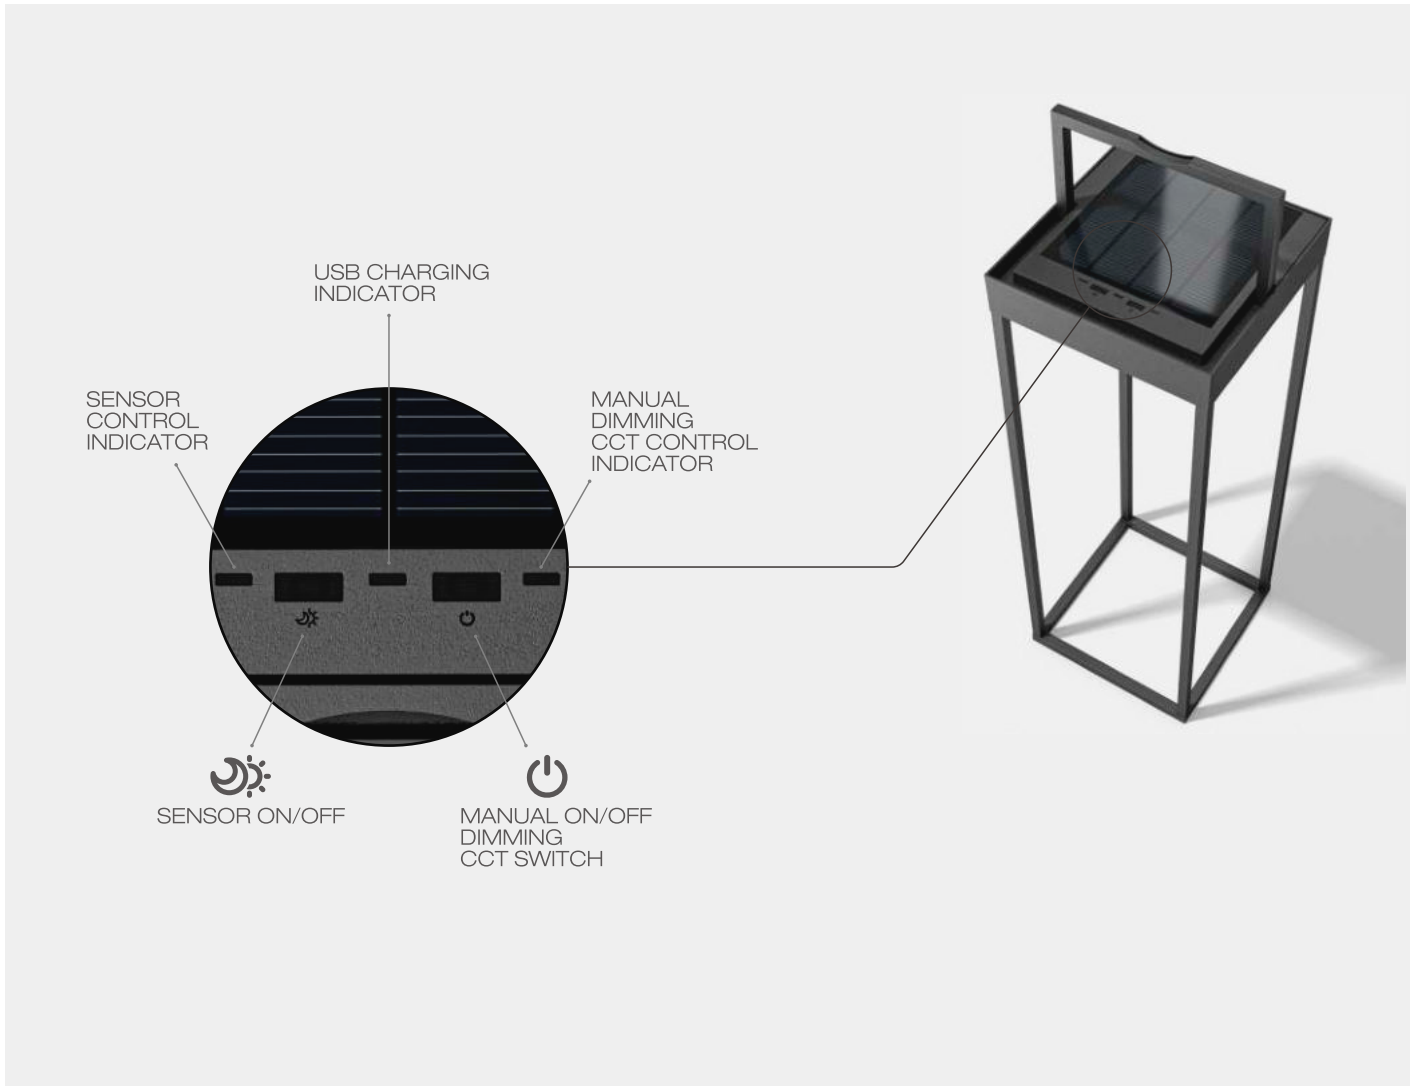

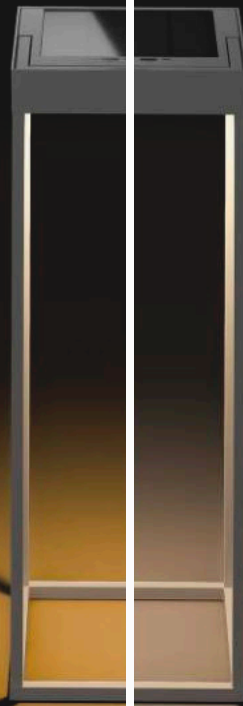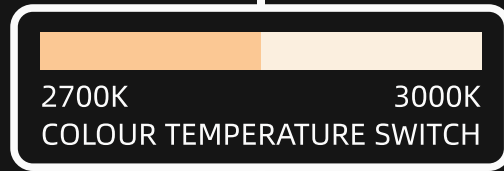

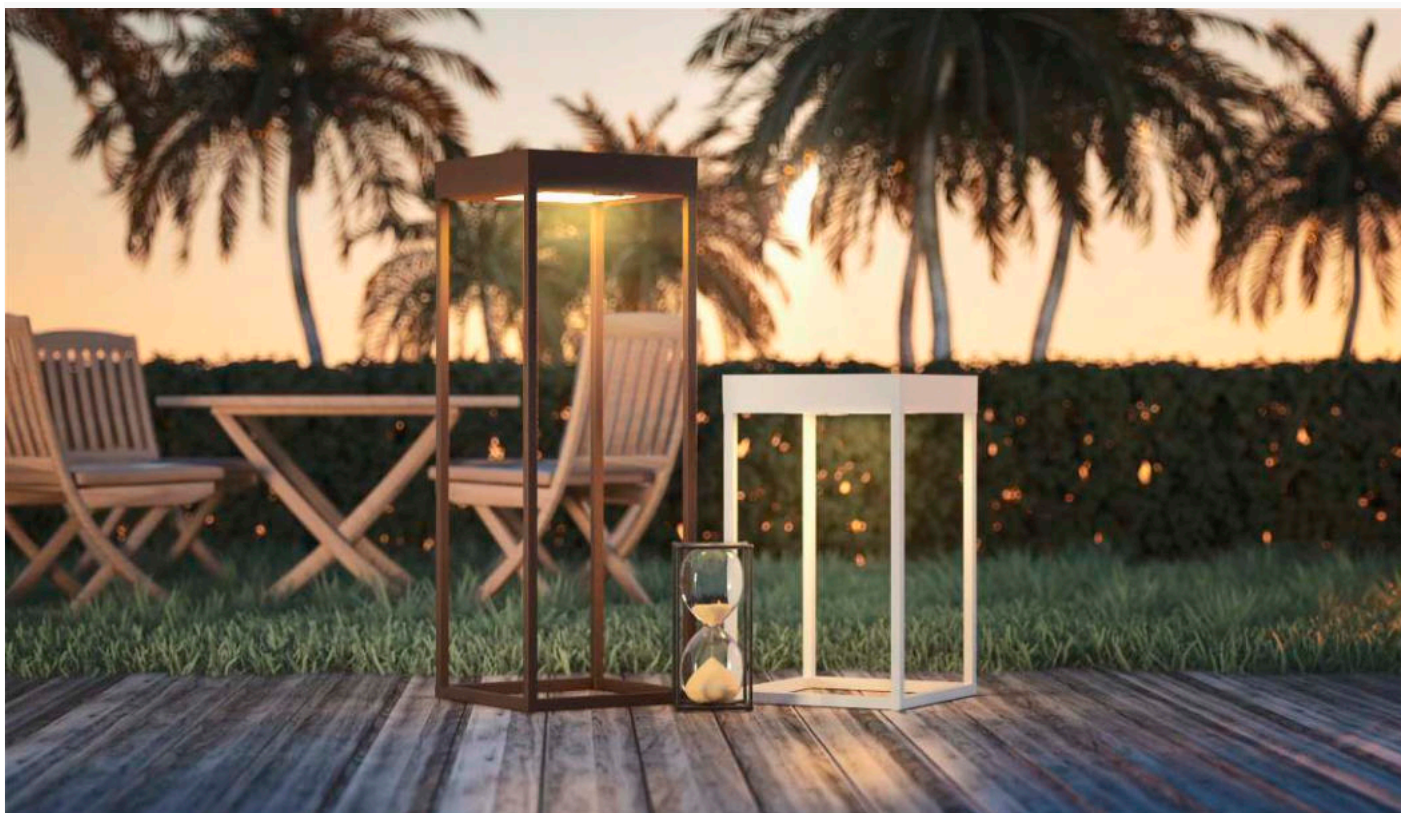

Accessories



Description:

Wall mount bracket



Description: USB Adapter,
CLASS II, Input AC100-240V,
Output DC5V 1A