



**Luminaire**

Code GIASS 25  
Name GIASS 25

**Measurement**


Code 0023FT20-25  
Name GIASS 25

Luminaire Flux	338.00 lm	Luminaire Power	21.50 W	Efficacy	15.72 lm/W	Efficiency	100.00%
Sources Flux	338.00 lm	Maximum value	867.04 cd/klm	Position	C=0.00 G=3.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.37	0.74	1.11	1.48	1.84	OC	0.37	0.74	1.11	1.48	1.84
OB	0.37	0.74	1.11	1.48	1.84	OD	0.37	0.74	1.11	1.48	1.84

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	292.20	286.78	195.50	109.02	65.86	59.32	51.81	39.41	23.25	7.07
OB	292.20	286.78	195.50	109.02	65.86	59.32	51.81	39.41	23.25	7.07
OC	292.20	286.78	195.50	109.02	65.86	59.32	51.81	39.41	23.25	7.07
OD	292.20	286.78	195.50	109.02	65.86	59.32	51.81	39.41	23.25	7.07

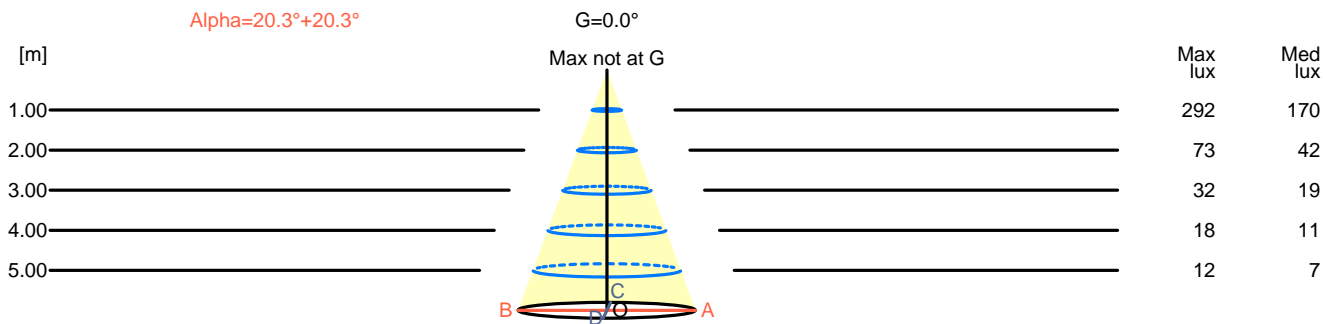

H[m]	D[m]	Max lux	Med lux	Alpha=20.3°+20.3°	G=0.0 Max not at G
1.00	0.74	292	170		
2.00	1.48	73	42		
3.00	2.21	32	19		
4.00	2.95	18	11		
5.00	3.69	12	7		



**Luminaire**

Code GIASS 25  
Name GIASS 25

**Measur.**

Code 0023FT20-25  
Name GIASS 25

Luminaire Flux	338.00 lm	Luminaire Power	21.50 W	Efficacy	15.72 lm/W	Efficiency	100.00%
Sources Flux	338.00 lm	Maximum value	867.04 cd/klm	Position	C=0.00 G=3.00	CG	Rotosymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

