

Fabbian


RIO

220/240V
50/60Hz


DATA SHEET
SCHEDA TECNICA



IP40





Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

RIO F72C01-C02

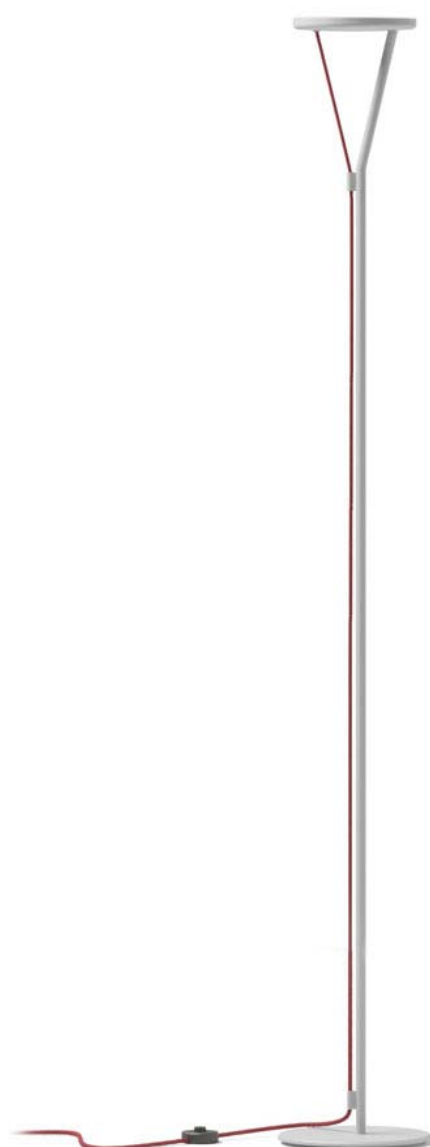




Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

POTENZA NOMINALE NOMINAL POWER COMSUPTION	MAX 1x25W
POTENZA SORGENTE LUMINOSA SOURCE POWER	MAX 1x25W
ALIMENTAZIONE SUPPLY VOLTAGE	230V 50/60Hz
COLLEGAMENTO CONNECTION	Alla tensione di rete To mains
DIMMERABILITA' DIMMER	PUSH DIM
NR E TIPO LED NR AND TYPE OF LED	SCHEDA LED 24V—DIAM. 100 N. 41 LED
DURATA MEDIA LED AVERAGE LED LIFE	50000 ore L70B10 50000 hours L70B10
CCT CCT	2700, 3000, (4000K by request)
CRI CRI	80min
SELEZIONE BINING	3 MacAdam Step
ANGOLO EMISSIONE OTTICA LIGHT OPTICAL BEAM	Diffuse
FLUSSO SORGENTE SOURCE FLUX	3500lm [3000K, Tj 85°C]
FLUSSO NETTO APPARECCHIO NET FLUX	2248lm [3000K, Tj 85°C]
DIMENSIONI DIMENSIONS	Ø20mm (testa) H. max 1820mm
PESO NETTO NET WEIGHT	5.3 Kg
FISSAGGIO FIXING	A terra piantana Floor to ceiling lamp
MATERIALE CORPO BODY MATERIAL	Ferro e alluminio Steel and aluminium
MATERIALE SCHERMO SCREEN MATERIAL	Diffusore PMMA Diffuser PMMA
FINITURE FINISHING	Bianco, antracite e corten cavo (rosso, blue, giallo/nero) White, Anthracite and corten cable (rosso, blue, yellow/black)



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

TEMPERATURA DI STOCCAGGIO STOCK TEMPERATURE	-20~45°C
TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	-20~45°C
GRADO IP IP GRADE	IP40
GLOW WIRE TEST	//
TEMPERATURE SCHERMO SCREEN TEMPERATURE	Max 40°C (Ta 25°C)
CLASSE ISOLAMENTO INSULATION CLASS	2
CLASSE EFFICIENZA ENERGETICA ENERGY EFFICIENCY CLASS	Prodotto fornito con sorgente in classe energetica E in accordo with UE 2019/2020 Fixture supplied with light source in energetic class E in accordance with UE 2019/2020
SICUREZZA FOTOBIOLOGICA PHOTOBIOLOGICAL SAFETY	Rischio 1 EN62471:2006 Risk group 1 EN62471:2006

Le informazioni contenute nella presente scheda tecnica possono essere modificate in qualsiasi momento senza preavviso e non comportano l'assunzione, nemmeno implicita, di alcuna obbligazione da parte di Fabbian.

Fabbian Srl reserves the right to change the information contained in this document at any time without prior notice being given.

Fabbian

RIO

220/240V
50/60Hz

DATA SHEET
SCHEDA TECNICA




IP40

MADE IN ITALY



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Dimensioni - Dimensions:

